

HORIZON

PREPARED BY: _____


TYPE: _____

JOB NAME: _____

DATE: _____

CERTIFICATION: UL LISTED

MODEL#	D"	H"
HC14	14"	9"
HC16	16"	9"
HC18	18"	12"

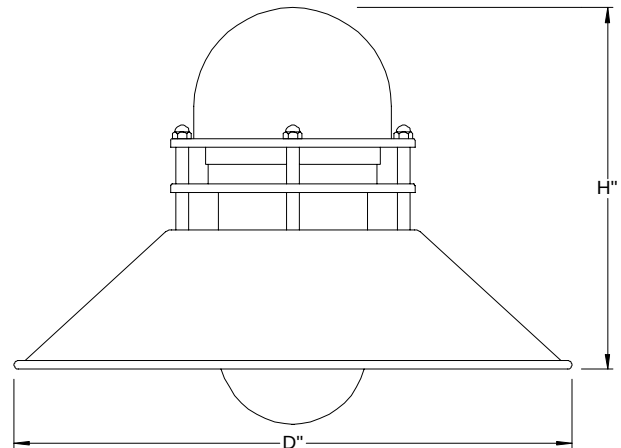

FINISH-Five stage pretreatment process, coated with a lead free TGI C polyester powder coat finish. White is standard inside reflectors, Except #49-Galvanized, #62-Anodized Bronze and #63-Iron Rust, Unless specified. Custom colors and Marine are available upon request.

MOUNTING- 1/2" or 3/4" tapped hub is supplied. Top or side mount available. Fixtures are pre-wired with 48" or 96" leads. Available with cord or stem sets.

REFLECTOR- Spun from heavy gauge 1100-0 aluminum, ranging in thickness from .050 to .125. Galvanized is from 20 gauge sheets. Copper is spun from .040 gauge and 110 soft alloy.

LAMP HOLDERS- Accommodates **Incandescent** medium base porcelain socket, copper shell with nicked plate, rated 250V, 660W. **Compact Fluorescent** 4 pin heat resistant thermoplastic socket accommodates 26/32W (Gx24q-3 base) and 42W (Gx24q-4 base). Twist lock design provides for vibration and earthquake resistance, rated 75W, 600V. **High Intensity Discharge (H.I.D.)** medium base, 4KV pulse start socket, rated 660W/600V. **LED**. A minimum of 60,000 hours to 100,000 expected life depending on installation location and ambient temperature.

MODEL#	FINISH		LIGHT SOURCE				MOUNTING OPT.
			INC	CF ¹	HID ¹	LED ¹	
HC14	40-copper w/ clear coat 41-black 42-dr. green 43-red	52-patina 53-rust 54-stucco 55-sage 57-polish alum. clear coat	200W	26W,	35, 50 OR 70W	20W	-Arm extension -Post Mts & Pole -Stem -Cord ² -Cable & Chain -Hub
HC16	44-white 45-med. blue 46-yellow 48-polish alum.	58-satin alum. 59-coppertone 60-canal green		Or	35, 50, 70 OR 100W		
HC18	49-galvanized 50-navy blue 51-arch. Bronze	61-anod. charcoal 62-anod. bronze 63-iron rust		42W,	35, 50, 70, 100 OR 150WW		

¹REMOTE BALLAST/DRIVER

²INC MAX WATTAGE 150W

CALL FACTORY FOR HIGHER WATTAGE



PHONE: 877-999-1990

FAX: 877-999-1955

12260 EAST END AVE. CHINO, CA 91710

HORIZON

PREPARED BY: _____


TYPE: _____

JOB NAME: _____

DATE: _____

CERTIFICATION: UL LISTED

MODEL#	D"	H"
HCX14	14"	13"
HCX16	16"	14"
HCX18	18"	16"

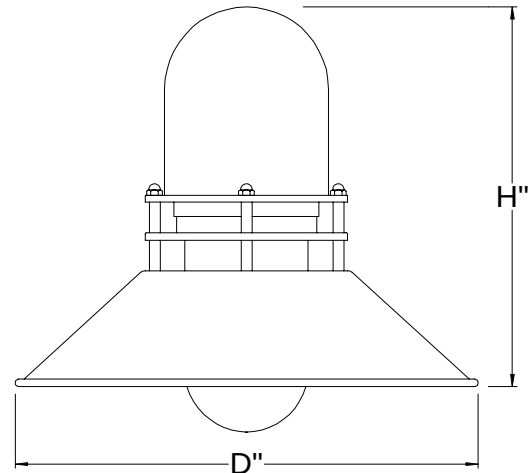

FINISH-Five stage pretreatment process, coated with a lead free TGI C polyester powder coat finish. White is standard inside reflectors, Except #49-Galvanized, #62-Anodized Bronze and #63-Iron Rust, Unless specified. Custom colors and Marine are available upon request.

MOUNTING- 1/2" or 3/4" tapped hub is supplied. Top or side mount available. Fixtures are pre-wired with 48" or 96" leads. Available with cord or stem sets.

REFLECTOR- Spun from heavy gauge 1100-0 aluminum, ranging in thickness from .050 to .125. Galvanized is from 20 gauge sheets. Copper is spun from .040 gauge and 110 soft alloy.

LAMP HOLDERS- Accommodates **Incandescent** medium base porcelain socket, copper shell with nicked plate, rated 250V, 660W. **Compact Fluorescent** 4 pin heat resistant thermoplastic socket accommodates 26/32W (Gx24q-3 base) and 42W (Gx24q-4 base). Twist lock design provides for vibration and earthquake resistance, rated 75W, 600V. **High Intensity Discharge (H.I.D.)** medium base, 4KV pulse start socket, rated 660W/600V. **LED**. A minimum of 60,000 hours to 100,000 expected life depending on installation location and ambient temperature.

MODEL#	FINISH		LIGHT SOURCE				MOUNTING OPT.
			INC	CF	HID	LED	
HCX14	40-copper w/ clear coat	52-patina	200W	26W,	35, 50 OR 70W	20W	-Arm extension -Post Mts & Pole -Stem -Cord ¹ -Cable & Chain -Hub
	41-black	53-rust		32W,			
HCX16	42-dr. green	54-stucco		Or	35, 50, 70 OR 100W		
	43-red	55-sage		42W,			
HCX18	44-white	57-polish alum. clear coat			35, 50, 70, 100 OR 150WW		
	45-med. blue	58-satin alum.					
	46-yellow	59-coppertone					
	48-polish alum.	60-canal green					
	49-galvanized	61-anod. charcoal					
	50-navy blue	62-anod. bronze					
	51-arch. Bronze	63-iron rust					

¹INC MAX WATTAGE 150W
CALL FACTORY FOR HIGHER WATTAGE

PHONE: 877-999-1990
FAX: 877-999-1955

BASELITE CORPORATION
12260 EAST END AVE. CHINO, CA 91710

MADE IN

U. S. A.

UL LISTED