

SHALLOW SHADES

PREPARED BY: _____


TYPE: _____

JOB NAME: _____

DATE: _____

CERTIFICATION: UL LISTED

MODEL#	D"	H"
S312	12	7.5
S314	14	7.5
S316	16	8.5

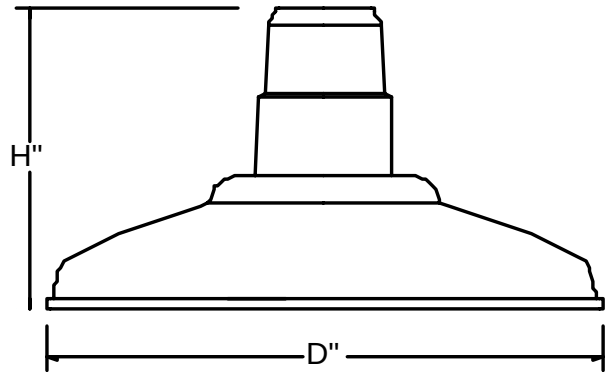

S312-S320

FINISH-Five stage pretreatment process, coated with a lead free TGI C polyester powder coat finish. White is standard inside reflectors, Except #49-Galvanized, #62-Anodized Bronze and #63-Iron Rust, Unless specified. Custom colors and Marine are available upon request.

MOUNTING- 1/2" or 3/4" tapped hub is supplied. Top or side mount available. Fixtures are pre-wired with 48" or 96" leads. Available with cord or stem sets.

REFLECTOR- Spun from heavy gauge 1100-0 aluminum, ranging in thickness from .050 to .125. Galvanized is from 20 gauge sheets. Copper is spun from .040 gauge and 110 soft alloy.

LAMP HOLDERS- Accommodates **Incandescent** medium base porcelain socket, copper shell with nicked plate, rated 250V, 660W. **Compact Fluorescent** 4 pin heat resistant thermoplastic socket accommodates 26/32W (Gx24q-3 base) and 42W (Gx24q-4 base). Twist lock design provides for vibration and earthquake resistance, rated 75W, 600V. **High Intensity Discharge (H.I.D.)** medium base, 4KV pulse start socket, rated 660W/600V. **LED**. A minimum of 60,000 hours to 100,000 expected life depending on installation location and ambient temperature.

MODEL#	FINISH		LIGHT SOURCE				MOUNTING OPT.
			INC	CF ¹	HID ¹	LED ¹	
S312	40-copper w/ coat	53-rust	100W	26W 32w	35W, 50W	10W	-Arm extension -Post Mts & Pole -Stem -Cord ² -Cable & Chain -Hub
	41-black	54-stucco					
	42-dr. green	55-sage	150W	26W, 32W, 42W,	35W, 50W, 70W, 100W	14W	
	43-red	57-polish alum w/ coat					
S314	44-white	58-satin alum. clear coat	200W			36W	
	45-med. blue	59-coppertone					
	46-yellow	60-canal green					
	48-polish alum.	61-anod. charcoal					
S316	49-galvanized	62-anod. bronze					
	50-navy blue	63-iron rust					
	51-arch. Bronze						
	52-patina						

¹REMOTE BALLAST/DRIVER

²INC MAX WATTAGE 150W

CALL FACTORY FOR HIGHER WATTAGE



12260 EAST END AVE. CHINO, CA 91710

PHONE: 877-999-1990

FAX: 877-999-1955

MADE IN



SHALLOW SHADES

PREPARED BY: _____


TYPE: _____

JOB NAME: _____

DATE: _____

CERTIFICATION: UL LISTED

MODEL#	D"	H"
S318	18	9
S320	20	10
S324	24	14

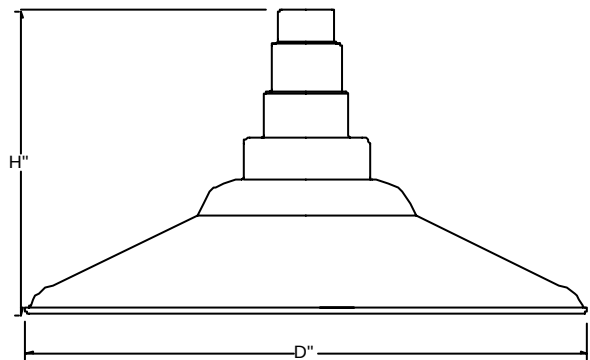

S324

FINISH-Five stage pretreatment process, coated with a lead free TGI C polyester powder coat finish. White is standard inside reflectors, Except #49-Galvanized, #62-Anodized Bronze and #63-Iron Rust, Unless specified. Custom colors and Marine are available upon request.

MOUNTING- 1/2" or 3/4" tapped hub is supplied. Top or side mount available. Fixtures are pre-wired with 48" or 96" leads. Available with cord or stem sets.

REFLECTOR- Spun from heavy gauge 1100-0 aluminum, ranging in thickness from .050 to .125. Galvanized is from 20 gauge sheets. Copper is spun from .040 gauge and 110 soft alloy.

LAMP HOLDERS- Accommodates **Incandescent** medium base porcelain socket, copper shell with nicked plate, rated 250V, 660W. **Compact Fluorescent** 4 pin heat resistant thermoplastic socket accommodates 26/32W (Gx24q-3 base) and 42W (Gx24q-4 base). Twist lock design provides for vibration and earthquake resistance, rated 75W, 600V. **High Intensity Discharge (H.I.D.)** medium base, 4KV pulse start socket, rated 660W/600V. **LED**. A minimum of 60,000 hours to 100,000 expected life depending on installation location and ambient temperature.

MODEL#	FINISH		LIGHT SOURCE				MOUNTING OPT.
			INC	CF ¹	HID ¹	LED ¹	
S318	40-copper w/ coat	53-rust	300w	26W,	35W,	57W	-Arm extension -Post Mts & Pole -Stem -Cord ² -Cable & Chain -Hub
S320	41-black	54-stucco		32W,	50W,	79W	
	42-dr. green	55-sage					
S324	43-red	57-polish alum w/ coat		42W,	70W,	93W	
	44-white	58-satin alum. clear coat					
	45-med. blue	59-coppertone					
	46-yellow	60-canal green					
	48-polish alum.	61-anod. charcoal					
	49-galvanized	62-anod. bronze					
	50-navy blue	63-iron rust					
	51-arch. Bronze						
	52-patina						

¹REMOTE BALLAST/DRIVER

²INC MAX WATTAGE 150W

CALL FACTORY FOR HIGHER WATTAGE



PHONE: 877-999-1990

FAX: 877-999-1955

12260 EAST END AVE. CHINO, CA 91710