

S E R I E S - W


PREPARED BY: _____

TYPE: _____

JOB NAME: _____

DATE: _____

CERTIFICATION: UL LISTED WET LOCATION

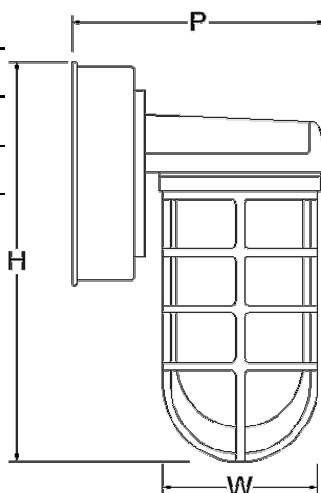


W1/CF

FINISH-Five stage pretreatment process, coated with a lead free TGI C polyester powder coat finish.

LAMP OPTIONS- Accommodates **Incandescent** medium base porcelain socket, copper shell with nicked plate, rated 250V, 660W. **Compact Fluorescent** 4 pin heat resistant thermoplastic socket accommodates 26/32W (Gx24q-3 base) and 42W (Gx24q-4 base). Twist lock design provides for vibration and earthquake resistance, rated 75W, 600V. **LED**. A minimum of 60,000 hours to 100,000 expected life depending on installation location and ambient temperature.

MOUNTING- wall mount

MATERIAL- Aluminum die cast

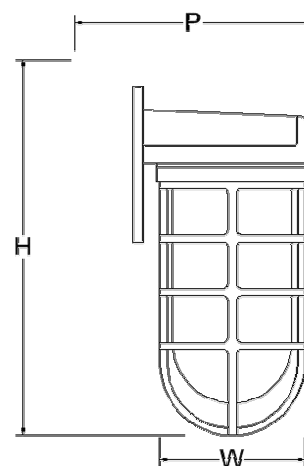

W1/LED

MODEL #	SIZE	GLASS	GUARD	FINISH	LIGHT SOURCE			DIMENSION
					INC	CF	LED	
W	1	CL-3" clear FR-3" frosted PR-3" prismatic RE-3" red BL-3" blue GR-3" green AH-3" amber Hyde	CG-cast	41-black 42-dr. green 43-red 44-white 45-med. blue 46-yellow 48-polish alum. 49-galvanized	100W			10"H x 4"W x 5" proj.
						26 or 32W	10W	10 ½"H x 5 ¾"W x 6 ¾" proj.
	2	CL-4" clear FR-4" frosted PR-4" prismatic RE-4" red BL-4" blue GR-4" green AH-4" amber Hyde	WG-wire	50-navy blue 51-arch. 52-patina 53-rust 54-stucco 55-sage	200W			12"H x 5 ¼"W x 5 ¾" proj.
						42W	20W	12 ½"H x 5 ¾"W x 7" proj.



PHONE: 877-999-1990
FAX: 877-999-1955

12260 EAST END AVE. CHINO, CA 91710

wet location

SERIES-HV

PREPARED BY: _____

TYPE: _____

JOB NAME: _____

DATE: _____

CERTIFICATION: UL LISTED WET LOCATION


FINISH-Five stage pretreatment process, coated with a lead free TGI C polyester powder coat finish. White is standard inside reflectors, Except #49-Galvanized, #62-Anodized Bronze and #63-Iron Rust, Unless specified. Custom colors and Marine are available upon request.

LAMP OPTIONS- Accommodates **Incandescent** medium base porcelain socket, copper shell with nicked plate, rated 250V, 660W. **Compact Fluorescent** 4 pin heat resistant thermoplastic socket accommodates 26/32W (Gx24q-3 base) and 42W (Gx24q-4 base). Twist lock design provides for vibration and earthquake resistance, rated 75W, 600V. **LED**. A minimum of 60,000 hours to 100,000 expected life depending on installation location and ambient temperature.



MOUNTING- wall mount

REFLECTOR- Spun from heavy gauge 1100-0 aluminum, ranging in thickness from .050 to .125. Galvanized is from 20 gauge sheets.

MATERIAL- Aluminum die cast

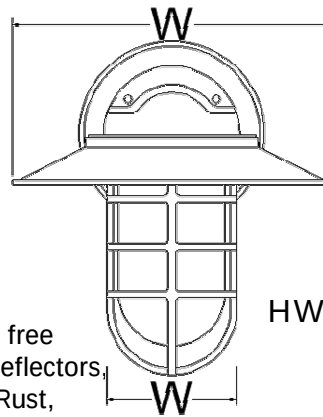

HW1/CF/LED

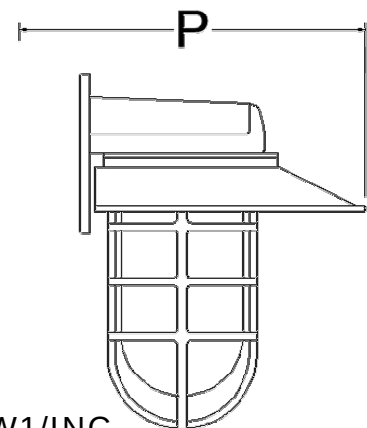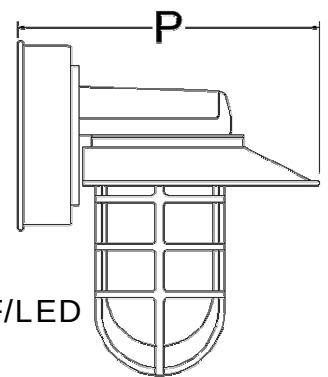

HW1/INC

MODEL #	SIZE	GLASS	GUARD	FINISH	LIGHT SOURCE			DIMENSION
					INC	CF	LED	
HW	1	CL-3" clear FR-3" frosted PR-3" prismatic RE-3" red BL-3" blue GR-3" green AH-3" amber Hyde	CG-cast	41-black 42-dr. green 43-red 44-white 45-med. blue 46-yellow 48-polish alum. 49-galvanized 50-navy blue 51-arch. 52-patina 53-rust 54-stucco 55-sage	100W			10"H x 8"W x 7" proj.
						26 or 32W	10W	10 ½"H x 8 ¾"W x 8 ¾" proj.
	2	CL-4" clear FR-4" frosted PR-4" prismatic RE-4" red BL-4" blue GR-4" green AH-4" amber Hyde	WG-wire		200W			12"H x10"W x 9" proj.
						42W	20W	12 ½"H x 10"W x 11" proj.



PHONE: 877-999-1990
FAX: 877-999-1955

12260 EAST END AVE. CHINO, CA 91710



wet location