

WALL MOUNTS

PREPARED BY: _____

TYPE: _____

JOB NAME: _____

CERTIFICATION: UL LISTED WET LOCATION

FINISH-Five stage pretreatment process, coated with a lead free TGI C polyester powder coat finish.

LAMP HOLDERS- Accommodates **Incandescent** medium base porcelain socket, copper shell with nicked plate, rated 250V, 660W.


Compact Fluorescent 4 pin heat resistant thermoplastic socket accommodates 26/32W (Gx24q-3 base) and 42W (Gx24q-4 base).

Twist lock design provides for vibration and earthquake resistance, rated 75W, 600V. **LED**. A minimum of 60,000 hours to 100,000

expected life depending on installation location and ambient temperature.

MOUNTING-wall mount

REFLECTOR- Spun from heavy gauge 1100-0 aluminum, ranging in thickness from .050 to .125. Galvanized is from 20 gauge sheets.

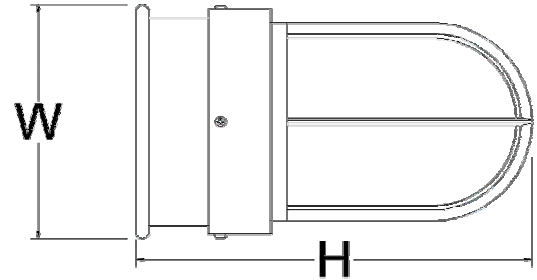

BSM1

Example: *BSM2/55/FR/100W INC*

MODEL#	SIZE	GLASS	GUARD	FINISH	LIGHT SOURCE

MODEL#	GUARD	GLASS	FINISH	LIGHT SOURCE			DIMENSION
				INC	CF	LED	
BSM	1	CL-clear FR-frosted	41-black	100W	26 or 32W	10W	6 ¼"H x 6 ¼"W x 9 1/2" Proj.
	2		42-dr. green				
	3		43-red				
	4		44-white				
	5		45-med. blue				
	6		46-yellow				
	11		48-polish Alum.	200W	26, 32 or 42W	20W	6 ¼"H x 6 ¼"W x 11 ½" Proj.
	12		49-galvanized				
	13		50-navy blue				
	14		51-arch. bronze				
	15		52-patina				
	16		53-rust				
			54-stucco				
			55-sage				
			59-coppertone				
			60-canal green				
	62-anod. bronze						
	63-iron rust						



PHONE: 877-999-1990
FAX: 877-999-1955

12260 EAST END AVE. CHINO, CA 91710



wet location