


## **MACHINE AGE**

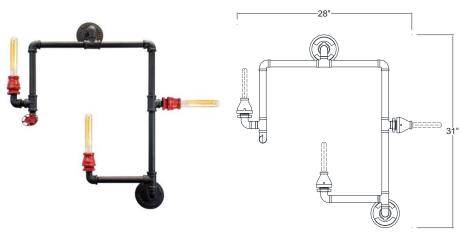

## **MODEL: WEW3**

PREPARED BY:		
TYPE:		
JOB NAME:		
DATE:		
CERTIFICATION:	UL LISTED	

WEW3/74-43/3-60WINC

**FINISH** – Five stage pretreatment process, coated with a lead free TGI C polyester powder coat finish. White is standard inside reflectors, \*some finish options excluded. See color chart below for color options (unless specified). Some finish options are not available for certain fixtures. Custom colors and Marine options are available upon request.

**LAMP HOLDERS** – Accommodates **Incandescent** – medium base porcelain socket, copper shell with nickel plate, rated 250v, 660W. **LED** – Designed to last with up to 50,000 hours, depending on installation location and ambient temperature (not available with colored cloth cords).

**MOUNTING** – Available with cord or stem mounting. Supplied with ½" or ¾" tapped hub with stem mounting. Fixtures are pre-wired with 48" or 96" leads or 96" cord.

**REFLECTOR** – Aluminum water pipe and cast aluminum pipe fittings.

MODEL# FINISH	FINIOU	LIGHT SOURCE			MOUNTING OPTIONS	ACCESCODIES	
	FINISH	INC	CF*	MH*	LED	MOUNTING OPTIONS	ACCESSORIES
WEW3	18, 19*, 19P, 21P*, 22P*, 23P*, 40*, 41, 42, 43, 44, 45, 46, 48*, 49*, 50, 51, 52, 53, 54*, 55, 57*, 58*, 59, 60, 61*, 62*, 63*, 70*, 71*, 72*, 73*, 74, 75, 76, 77, 78*, 79, 80, 81, 82, 83,* 84*, 85, 86, 87, 88*, 89, 90, 91, 92*, 93*, 94*, 95, 96, 97, 98*, 99, PN	3-60W	N/A	N/A	12W	WALL MOUNT	N/A

<sup>\*</sup> same finish color inside and out.

\* remote ballast / driver.

SUBJECT TO MODIFICATION WITHOUT NOTICE.



PH: 877-999-1990
WEB: WWW.BASELITE.COM
EMAIL: SALES@BASELITE.COM



