




PENDANTS



PTHD/43/BLC

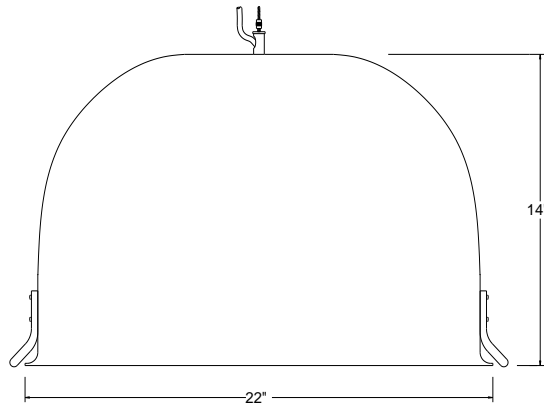

MODEL: PTHD

PREPARED BY: _____

TYPE: _____

JOB NAME: _____

DATE: _____

CERTIFICATION: UL LISTED

FINISH - Five stage pretreatment process, coated with a lead free TGI C polyester powder coat finish. White is standard inside reflectors, *some finish options excluded. See color chart below for color options (unless specified). Some finish options are not available for certain fixtures. Custom colors and Maine options are available upon request.

LAMP HOLDERS - Accommodates **Incandescent** - medium base porcelain socket, copper shell with nickel plate, rated 250v, 660W. **Compact Fluorescent** - 4 pin heat resistant thermoplastic socket accommodates 26/32W (Gx24q-3 base). Twist lock design provides for vibration and earthquake resistance, rated 75W, 60V. **High Intensity Discharge (H.I.D.)** - medium base, 4KV pulse start socket, rated 660W/600V. **LED** - Designed to last with up to 50,000 hours, depending on installation location and ambient temperature.

MOUNTING - 1/2" or 3/4" tapped hub is supplied. Top or side mount available. Fixtures are pre-wired with 48" or 96" leads. Available with cord or stem sets.

REFLECTOR - Spun from heavy gauge 1100-0 aluminum, ranging in thickness from .050 to .125. Galvanized is from 20 gauge sheets. Copper is spun from .040 gauge and 110 soft alloy.

MODEL #	FINISH	LIGHT SOURCE				MOUNTING OPTIONS	ACCESSORIES
		INC	CF**	MH**	LED**		
PTHD	17, 18, 19*, 21P*, 23P*, 40*, 41, 42, 42, 43, 44, 45, 46, 48*, 49*, 50, 51, 52, 53, 54, 55, 58*, 59, 60, 61*, 62*, 63*, 70*, 71*, 72*, 73*, 74, 75, 76, 77, 78*, 79, 80, 81, 82, 83*, 84*, 85, 86, 87, 88*, 89, 90, 91, 92*, 93*, 95, 96, 97	150W	26W, 32W, 42W	N/A	25W	CORD, STEM	SEE CATALOG FOR ACCESSORY OPTIONS.

* same finish color inside and out.

** remote ballast / driver.

.SUBJECT TO MODIFICATION WITHOUT NOTICE.



BASELITE CORPORATION
12260 EAST END AVE.
CHINO, CA 91710

PH: 877-999-1990
WEB: WWW.BASELITE.COM
EMAIL: SALES@BASELITE.COM

