



# BASELITE – OPAL BALL – INC – SPECIFICATION SHEET



PROJECT NAME: \_\_\_\_\_ PROJECT TYPE: \_\_\_\_\_

MODEL #	/	/	/	/	/	/	/	X	X	/	X	X	/	X
	A	B	C	D	E	F	G	H	I	J	K			
EXAMPLE:	W513	41	E16	SQ 1/2"	43	100W								

\*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



2GOB8/20P/0WM/20P/2.60INC

## A - SHADES

- OPAL BALL**
- OB8** - 60WINC (MAX)
  - OB10** - 100WINC (MAX)
  - OB12** - 100WINC (MAX)
  - OB14** - 150WINC (MAX)
  - OB16** - 150WINC (MAX)
  - OB18** - 150WINC (MAX)
  - OB20** - 200WINC (MAX)
  - OB22** - 200WINC (MAX)
  - 2GOB8** - 60WINC (MAX)
  - OBF10** - 60WINC (MAX)

## B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)  
(\*SEE NOTES FOR LIMITATIONS\*)

14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB, 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

## C – MOUNTING OPTIONS

- CORD MOUNT (LED & CF)**  
BLC, WHC, TCHB, TCHW, TLB, TLW, LTLB, TLW, RCB, RCW, RCHB, RCHW, FHB, FHW, CBLC, CWHC
- STEM MOUNT**  
ST6, ST12, ST18, ST24, ST36, ST48, STXX

## D – MOUNTING ADD-ONS

- INC ADD-ONS**  
SLC1/2", SLC3/4", STC1/2"
- UNIVERSAL ADD-ONS**  
CNK

## E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

## F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)  
**INCANDESCENT (INC)**  
60W, 100W, 150W, 200W

## G – LED COLOR TEMP

NOT AVAILABLE

## H – ELECTRICAL OPTION

NOT AVAILABLE

## I – GLASS OPTIONS

NOT AVAILABLE

## J – ACCESSORIES


NOT AVAILABLE

## K – ACCESSORY COLOR


NOT AVAILABLE

## NOTES

- FINISH OPTIONS 20, 21, 22, 23 ARE FOR SOLID BRASS FIXTURES ONLY.
- FINISH OPTIONS 19, 21, 22, 23, 75,76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
- FINISH OPTIONS 19, 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.  
\*ALL FIXTURES MOUNT TO A 4-0 JUNCTION BOX.  
\*FIXTURE DIMENSIONS MAY VARY ± 0.25.




	HEIGHT	WIDTH
<b>OB8</b>	8"	8"
<b>OB10</b>	10"	10"
<b>OB12</b>	12"	12"
<b>OB14</b>	14"	14"
<b>OB16</b>	16"	16"
<b>OB18</b>	18"	18"
<b>OB20</b>	20"	20"
<b>OB22</b>	22"	22"



	HEIGHT	WIDTH
<b>2GOB8</b>	16"	16" TO 31.5"

\*FIXTURE COMES AS SHOWN  
\*ALL MOUNTING OPTIONS DO NOT APPLY



	HEIGHT	WIDTH
<b>OBF10</b>	11"	9.5"




**C - MOUNTING OPTIONS**

**STEM MOUNTS**

\*STEMS RATED FOR DAMP LOCATION

\*DP24 COMES STANDARD WITH STC AND ST18

\* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST

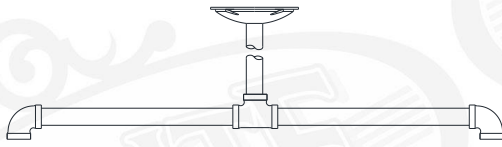

**DP24** DOUBLE PENDANT



**ST(XX)** - STEM- 1/2" NPT


XX = LENGTH OF STEM  
(EXAMPLE -- "ST18" = STEM MOUNT 18" LENGTH)  
\*CANOPY NOT INCLUDED, ADD IN SECTION D

**INCANDESCENT CORD MOUNTS**

\*INCANDESCENT MAX WATTAGE 150 WATT. CALL FACTORY FOR HIGHER WATTAGES. LOOPS, CABLES, AND CHAINS AVAILABLE ONLY FOR INCANDESCENT \*CORDS RATED FOR DRY LOCATION \*CANOPY DIMENSIONS: .625" (H) 5.25" (W)




**BLC** 8' BLACK CORD  
**WHC** 8' WHITE CORD



**TCB** 8' BLACK CORD, CABLE, and LOOP  
**TCW** 8' WHITE CORD, CABLE, and LOOP



**TCHB** 8' BLACK CORD, 3" CHAIN, and LOOP  
**TCHW** 8' WHITE CORD, 3" CHAIN, and LOOP



**RCB** 8' BLACK CORD, CABLE, and LOOP  
**RCW** 8' WHITE CORD, CABLE, and LOOP




**RCHB** 8' BLACK CORD, 3" CHAIN, and LOOP  
**RCHW** 8' WHITE CORD, 3" CHAIN, and LOOP


**D - MOUNTING ADD-ONS**

**INCANDESCENT STEM ADD-ONS**

\* FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



**SLC 1/2"** SLOPE CEILING CANOPY 1/2"  
**SLC 3/4"** SLOPE CEILING CANOPY 3/4"  
(Slopes to 20 Degrees)



**STC 1/2"** 1/2" STEM MOUNT CANOPY

**UNIVERSAL STEM AND ARM ADD-ONS**



**CNK** CANOPY For MULTIPLE FIXTURES

\*CNK dimensions vary on number of fixtures applied



**F – LIGHT SOURCE**

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

**INCANDESCENT (INC) MED E26**

**INC 60W (MAX)**- OB8, OBF8, 2G008  
**INC 100W (MAX)**- OB10, OB12  
**INC 150W (MAX)**- OB14, OB16, OB18  
**INC 200W (MAX)**- OB20, OB22

**\*IMPORTANT** – FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT.

EXAMPLE: / INC150W /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
60WINC	60W	PER BULB SPECS	>90	120-277 VAC	N/A
100WINC	100W	PER BULB SPECS	>90	120-277 VAC	N/A
150WINC	150W	PER BULB SPECS	>90	120-277 VAC	N/A
200WINC	200W	PER BULB SPECS	>90	120-277 VAC	N/A