




# MACHINE AGE

SPECIFICATION SHEET



10S2WG4.21.RCC.EXGRT.10-60INC

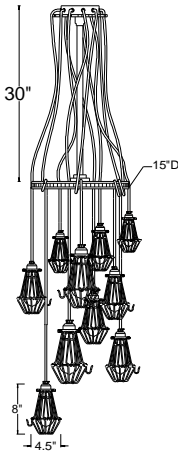

**MODEL: 10S2WG4**

PREPARED BY: \_\_\_\_\_

TYPE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

CERTIFICATION: UL LISTED

**FINISH** – Five stage pretreatment process, coated with a lead free TGI C polyester powder coat finish. White is standard inside reflectors, \*some finish options excluded. See color chart below for color options (unless specified). Some finish options are not available for certain fixtures. Custom colors and Marine options are available upon request.

**LAMP HOLDERS** – Accommodates **Incandescent** – medium base porcelain socket, copper shell with nickel plate, rated 250v, 660W.

**MOUNTING** – Available with cord mounting only. Fixtures are pre-wired with 96” cord. Customer can determine length of cord wrapped around the gear.

**REFLECTOR** – Socket covers are spun from heavy gauge 1100-0 aluminum, ranging in thickness from .050 to .125. Aluminum stem and cast aluminum gears.

| MODEL # | FINISH  | LIGHT SOURCE |                     |     |     | MOUNTING OPTIONS | ACCESSORIES |
|---------|---|--------------|---------------------|-----|-----|------------------|-------------|
|         |   | INC          | CF*                 | MH* | LED |                  |             |
| 10S2WG4 | 14, 15, 16, 17, 18, 19*, 19P, 20, 20P, 21, 21P*, 22P*, 22, 23, 23P*, 38, 39, 40*, 41, 42, 43, 44, 45, 46, 48*, 49*, 50, 51, 52, 53, 54*, 55, 57*, 58*, 59, 60, 61*, 62*, 63*, 64, 65, 66, 70*, 71*, 72*, 73*, 74, 75, 76, 77, 78*, 79, 80, 81, 82, 83,* 84*, 85, 86, 87, 88*, 89, 90, 91, 92*, 93*, 94*, 95, 96, 97, 98*, 99, 100 | 150W         | 26W,<br>32W,<br>42W | N/A | 25W | CORD MOUNT       | N/A         |

\* same finish color inside and out.  
\* remote ballast / driver.

.SUBJECT TO MODIFICATION WITHOUT NOTICE.



BASELITE CORPORATION  
12260 EAST END AVE.  
CHINO, CA 91710

PH: 877-999-1990  
WEB: WWW.BASELITE.COM  
EMAIL: SALES@BASELITE.COM

