



# BASELITE – OPAL BALL – LED – SPECIFICATION SHEET



PROJECT NAME: \_\_\_\_\_ PROJECT TYPE: \_\_\_\_\_

MODEL #	/	/	/	/	/	/	/	/	/	X	X	X
	A	B	C	D	E	F	G	H	I	J	K	
EXAMPLE:	W513	41	E16	SQ 1/2"	43	100W	3K	LDM120				

\*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



2GOB8/20P/G/W/M/20P/2.60INC

## A - SHADES

- OPAL BALL**
- OB8 - 10WLED (MAX)
  - OB10 - 12WLED (MAX)
  - OB12 - 12WLED (MAX)
  - OB14 - 12WLED (MAX)
  - OB16 - 25WLED (MAX)
  - OB18 - 25WLED (MAX)
  - OB20 - 25WLED (MAX)
  - OB22 - 25WLED (MAX)
  - 2GOB8 - 25WLED (MAX)
  - OBF10 - 25WLED (MAX)

## B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)  
 (\*SEE NOTES FOR LIMITATIONS\*)  
 14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB, 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

## C - MOUNTING OPTIONS

- LED CORD MOUNT**  
 LBLC, LWHC, LTCB, LTCW, LTCHB, LTCHW, LRCB, LRCW, LRCHB, LRCHW
- STEM MOUNT**  
 ST6, ST12, ST18, ST24, ST36, ST48, STXX

## D - MOUNTING ADD-ONS

- INC ADD-ONS**  
 LSLC1/2", LSLC3/4", LSTC1/2"
- UNIVERSAL ADD-ONS**  
 LCNK

## E - MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

## F - LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)  
**LIGHT EMITTING DIODE (LED)**  
 10W, 12W, 25W

## G - LED COLOR TEMP

- 27K - 2700 K
- 3K - 3000 K
- 35K - 3500 K
- 4K - 4000 K
- 5K - 5000 K

## H - ELECTRICAL OPTION

- (SEE PAGE 4 FOR DIMMING OPTION SPECIFICATIONS)
- LDM10WF
  - LDM0-10V
  - LDMTRI

## I - GLASS OPTIONS

NOT AVAILABLE

## J - ACCESSORIES

NOT AVAILABLE


## K - ACCESSORY COLOR

NOT AVAILABLE


## NOTES

- FINISH OPTIONS 20, 21, 22, 23 ARE FOR SOLID BRASS FIXTURES ONLY.
- FINISH OPTIONS 19, 21, 22, 23, 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
- FINISH OPTIONS 19, 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.  
 \*ALL FIXTURES MOUNT TO A 4-0 JUNCTION BOX.  
 \*FIXTURE DIMENSIONS MAY VARY ± 0.25.

\*LARGER SIZES AVAILABLE UPON REQUEST. UP TO 36". THESE SIZES ARE CUSTOM MADE. CALL FACTORY FOR DETAILS.




	HEIGHT	WIDTH
OB8	8"	8"
OB10	10"	10"
OB12	12"	12"
OB14	14"	14"
OB16	16"	16"
OB18	18"	18"
OB20	20"	20"
OB22	22"	22"

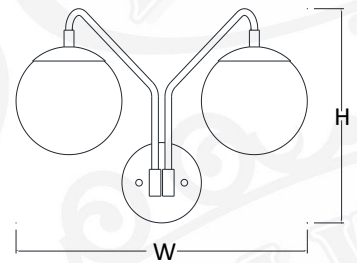

	HEIGHT	WIDTH
2GOB8	16"	16" TO 31.5"

\*FIXTURE COMES AS SHOWN  
 \*ALL MOUNTING OPTIONS DO NOT APPLY



	HEIGHT	WIDTH
OBF10	11"	9.5"




**C - MOUNTING OPTIONS**

**STEM MOUNTS**

\*STEMS RATED FOR DAMP LOCATION

\*DP24 COMES STANDARD WITH STC AND ST18

\* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST

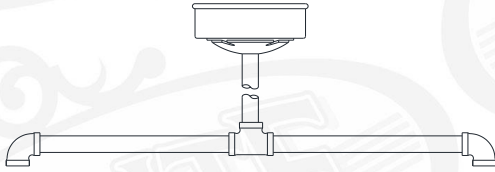

**DP24** DOUBLE PENDANT



**ST(XX)** - STEM- 1/2" NPT

XX = LENGTH OF STEM  
(EXAMPLE -- "ST18" = STEM MOUNT 18" LENGTH)  
\*CANOPY NOT INCLUDED, ADD IN SECTION D

**L.E.D. CORD MOUNTS**

\*INCANDESCENT MAX WATTAGE 150 WATT. CALL FACTORY FOR HIGHER WATTAGES. LOOPS, CABLES, AND CHAINS AVAILABLE ONLY FOR INCANDESCENT \*CORDS RATED FOR DRY LOCATION \*CANOPY DIMENSIONS: .625" (H) 5.25"(W)



**BLC** 8' BLACK CORD  
**WHC** 8' WHITE CORD



**TCB** 8' BLACK CORD, CABLE, and LOOP  
**TCW** 8' WHITE CORD, CABLE, and LOOP



**TCHB** 8' BLACK CORD, 3" CHAIN, and LOOP  
**TCHW** 8' WHITE CORD, 3" CHAIN, and LOOP



**RCB** 8' BLACK CORD, CABLE, and LOOP  
**RCW** 8' WHITE CORD, CABLE, and LOOP




**RCHB** 8' BLACK CORD, 3" CHAIN, and LOOP  
**RCHW** 8' WHITE CORD, 3" CHAIN, and LOOP


**D - MOUNTING ADD-ONS**

**L.E.D. STEM ADD-ONS**

\* FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



**LSLC 1/2"** SLOPE CEILING CANOPY 1/2"  
**LSLC 3/4"** SLOPE CEILING CANOPY 3/4"  
(Slopes to 20 Degrees)



**LSTC 1/2"** 1/2" STEM MOUNT CANOPY

**UNIVERSAL STEM AND ARM ADD-ONS**



**LCNK** CANOPY For MULTIPLE FIXTURES

\*CNK dimensions vary on number of fixtures applied



**F – LIGHT SOURCE**

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

**LIGHT EMITTING DIODE (LED)**

**LED 10W (MAX)-** OB8, OBF8, 2G008  
**LED 12W (MAX)-** OB10, OB12  
**LED 25W (MAX)-** OB14, OB16, OB18, OB20, OB22

**\*IMPORTANT –** FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT.

EXAMPLE: / 10WLED /

OPTION	WATTAGE	LUMENS		CRI	VOLTAGE	DIMMING
10WLED	10W	1015	1085	>90	120-277 VAC	SEE SECTION "H"
12WLED	12W	1000	1200	>90	120-277 VAC	SEE SECTION "H"
25WLED	25W	1900 @3K	2000 @5K	>90	120-277 VAC	SEE SECTION "H"

**H – ELECTRICAL OPTION**

MOST BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES. PLEASE SEE NOTES BELOW AND FOR FURTHER DEATIALS CONTACT THE FACTORY. FOR DIMMING BALLAST OPTION PLEASE CHOOSE MARK X OR MARK VII, SO RESTRICTIONS APPLY DUE TO THE SIZE OF THE BALLAST AND FIXTURE.

**LED DIMMING OPTIONS**

FOR TRIAC OR 0-10V OPTOIN CHOOSE FROM THE FOLLOWING. CONTACT DRIVER MANUFACTURER FOR SPECIFICATIONS.

\*FOR 10WLED OPTION

- **LDM10WF** - TRIAC TRI-ELV – 120V-277V (DIMMING AT 120 VOLT ONLY)

\*FOR 12W AND 25W OPTION

- **LDM0-10V** – 0 – 10v (120-277V)
- **LDMTRI** – TRI-ELV (120-277V)