



BASELITE – HALF DOME – LED – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	/	/
EXAMPLE:	A HD16	B 41	C B15	D CB ½"	E 43	F 45W	G 3K	H LDM120	I PR3	J GR16	K 44

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



HD20/58/BHC/100INC

A - SHADES

- HALF DOME**
HD10 - 12WLED (MAX)
HD12 - 25WLED (MAX)
HD14 - 25WLED (MAX)
HD16 - 35WLED (MAX)
HD18 - 75WLED (MAX)
HD20 - 75WLED (MAX)
HD24 - 75WLED (MAX)
HD30 - 75WLED (MAX)
HD36 - 75WLED (MAX)
HD42 - 75WLED (MAX)
HD48 - 75WLED (MAX)
HDG12 - 25WLED (MAX)
QD16 - 75WLED (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)
 (*SEE NOTES FOR LIMITATIONS*)
 14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB,
 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40,
 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51,
 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64,
 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79,
 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91,
 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C – MOUNTING OPTIONS

- ½" ARM EXTENSIONS**
 E1, E2, E3, E4, B1, E16, E17, E18
¾" ARM EXTENSIONS
 E3A, E4A, E5, E6, E7, E8, E9,
 E10, E11, E12, E13, B15, B15S,
 E19, E20, E21, E25
E14 - CREATE YOUR OWN
 (BASELITE WILL TAKE YOUR SKETCH AND
 FABRICATE A CUSTOM ARM EXTENSION TO
 MEET YOUR NEEDS).
¼" WALL MOUNT
 WM20, WM21, WM23,
 WM26, WM29, WM29V
½" WALL MOUNT
 B13, WM13R, WM13X, B10, B11, B101
¾" WALL MOUNT
 B9, B9C, B12, WM10, WM11, WM14X,
 WM15, WM35X, WM55X, WM60X,
 WM61X WM70X, WM71X
LED CORD MOUNT
 LBLC, LWHC, LTCB, LTCW, LTCHB,
 LTCHW, LTLB, LTLW, LTLB, LTLW, LRCB,
 LRCW, LRCHB, LRCHW, LFHB, LFHW,
 LHBLC, LHWHC, LCBLC, LCWHC
STEM MOUNT
 ST6, ST12, ST18, ST24, ST36, ST48, STXX

D – MOUNTING ADD-ONS

- LED ADD-ONS**
 LWTM, LSLC, LSTC
UNIVERSAL ADD-ONS
 SQ ½", SQ ¾", FH ½", FH ¾", TRB ½", TRB ¾",
 SWL, LGSWL, CNK, INB, RINB

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)
LIGHT EMITTED DIODE (LED)
 12W, 25W, 45W, 75W

G – LED COLOR TEMP

- 27K – 2700 K
 3K – 3000 K
 35K – 3500 K
 4K – 4000 K
 5K – 5000 K

H – ELECTRICAL OPTION

(SEE PAGE 4 FOR DIMMING OPTION SPECIFICATIONS)
LDM120
LDM277
LDM0-10

I – GLASS OPTIONS

- CL3, CL4, CLT3, CLT4, BL3, BL4, RE3, RE4,
 GR3, GR4, AH3, AH4, FR3, FR4, FRT3, FRT4,
 PR3, PR4, BA, BAX, BAF, PR8, PR8F, FN, OC

J – ACCESSORIES


- GR10, GR12, GR14, GR16, GR18, GR27, REF,
 UGR, LGR10, LGR12, LGR14, LGR16, LGR18,
 LGR27, CRL10, CRL12, CRL14, CRL16, CRL18,
 CRL27, FLE10, FLE12, FLE14, FLE16, FLE18,
 FLE27, FGR10, FGR12, FGR14, FGR16, FGR18,
 FGR27, GU-1, GU-2, WG-1, WG-2

K – ACCESSORY COLOR


SEE SECTION "B" FOR COLOR OPTIONS.

NOTES

- FINISH OPTIONS 20, 21, 22, 23 ARE FOR SOLID BRASS FIXTURES ONLY.
- FINISH OPTIONS 19, 21, 22, 23, 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
- FINISH OPTIONS 19, 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- FINISH OPTIONS FOR SHADES ≤ 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES > 10" IN DIAMETER ARE WHITE ON THE INSIDE.
- FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
 *ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
 *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).
 *ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.
 *FIXTURE DIMENSIONS MAY VARY ± 0.25.
 *CORD AND CANOPY COME IN THE SAME COLOR.

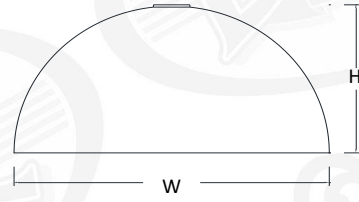


HD10	H-5"	W-10"
HD12	H-6"	W-12"
HD14	H-7"	W-14"
HD16	H-8"	W-16"
HD18	H-9"	W-18"
HD20	H-10"	W-20"
HD24	H-12"	W-24"
HD30	H-15"	W-30"
HD36	H-18"	W-36"
HD42	H-21"	W-42"
HD48	H-24"	W-48"



HDG12	H-9"	W-13.5"
--------------	------	---------

*EFGR COMES STANDARD WITH SHADE.
 ALL OTHER ACCESSORIES DO NOT APPLY



QD16	H-6"	W-17"
-------------	------	-------

*EFGR COMES STANDARD WITH SHADE.
 ALL OTHER ACCESSORIES DO NOT APPLY



C - MOUNTING OPTIONS

1/2" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED




E1 8.5"(H) 18.5"(W)




E2 18.5"(H) 35"(W)




E3 16"(H) 24.75"(W)



E4 14.5"(H) 22.25"(W)



E16 4.75"(H) 8.5"(W)



E17 4.75"(H) 9.5"(W)




E18 4.75"(H) 12"(W)




B1 6"(H) 12"(W)

3/4" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED




E20 85"(H) 27.25"(W)




E3A 16.375"(H) 26.25"(W)



E4A 14.5"(H) 23.75"(W)




E5 15"(H) 38.5"(W)




E6 9"(H) 23.75"(W)



E9 41.75"(H) 28.125"(W)




E12 6(H) 39"(W)




E7 9"(H) 49.75"(W)




E8 12"(H) 31.25"(W)




B15 7.5"(H) 24.5"(W)




E11 19"(H) 36.5"(W)




E10 18"(H) 55.75"(W)




E13 30.625"(H) 26.75"(W)




E25 32.625"(H) 28.5"(W)



B15S 7.5"(H) 19.5"(W)

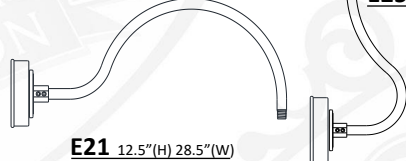

E21 12.5"(H) 28.5"(W)




E19 10.625"(H) 11.5"(W)

NOTES:



* All arms sold with Cast Backplate (CB)
* Backplate may vary in size depending on light source.


E14




* Baselite will take your sketch and fabricate a custom arm extension to meet your needs
* Dimensions to be determined by customer

1/4" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION *FOR SHADES 10" OR SMALLER IN DIAMETER * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



WM20 6"(H) 8.25"(W)



WM21 4.75"(H) 8"(W)



WM23 12.5"(H) 8"(W)



WM26 12"(H) 9"(W)



WM29 9.5"(H) 14"(W)




WM29V 21.75"(H) 15.25"(W)

1/2" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



B10 6"(H) 12.5"(W)




B101 6"(H) 13.5"(W)



B11 6"(H) 14.5"(W)



B13 6"(H) 16.5"(W)



WM13R 12"(H) 9.5"(W)



WM13X 12"(H) 10.5"(W)



C - MOUNTING OPTIONS (CONTINUED)

3/4" WALL MOUNTS


*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



B12 6"(H) 15.5"(W)




B9 5"(H) 18"(W)




B9C 5"(H) 18"(W)

*CHAIN HEIGHT TBD BY CUSTOMER



WM14X 18"(H) 14"(W)




WM15 23"(H) 19.5"(W)




WM35X 26"(H) 22"(W)




WM55X 19"(H) 27"(W)




WM60X 18"(H) 22"(W)



WM61X 18"(H) 22"(W)




WM70X 18"(H) 22"(W)



WM71X 18"(H) 22"(W)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

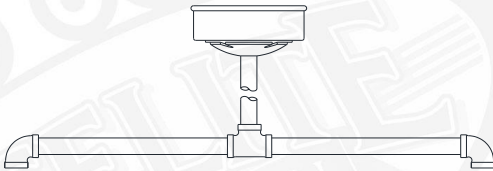


DP24 DOUBLE PENDANT 20"(H) 24"(W)

*DP24 COMES STANDARD WITH LSTC AND ST18



ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D
* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST



SC24 SCROLL STEM 33"(H) 26"(W)

*SC24 COMES STANDARD WITH LSTC

LED CORD MOUNTS

FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.
*CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: 3" (H) 6" (W) *CORD AND CANOPY COME IN THE SAME COLOR.



LBLC 8' BLACK CORD
LWLC 8' WHITE CORD



LTCB 8' BLACK CORD, CABLE, and LOOP
LTCW 8' WHITE CORD, CABLE, and LOOP



LTCHB 8' BLACK CORD, 3" CHAIN, and LOOP
LTCHW 8' WHITE CORD, 3" CHAIN, and LOOP



LTLB 8' BLACK TELEPHONE CORD AND CABLE
LT LW 8' WHITE TELEPHONE CORD AND CABLE
* Not available with compact fluorescent



LRCB 8' BLACK CORD, CABLE, and LOOP
LRCW 8' WHITE CORD, CABLE, and LOOP




LRCHB 8' BLACK CORD, 3" CHAIN, and LOOP
LRCHW 8' WHITE CORD, 3" CHAIN, and LOOP



LFHB 8' BLACK CORD WITH FLAT HUB
LFHW 8' WHITE CORD WITH FLAT HUB



LCBLC 8' BLACK CORD and CABLE
LCWLC 8' WHITE CORD and CABLE




NOTES:
*DISTANCE TO LAMP (CF) 10"
*All compact fluorescent and LED housings may vary in size according to light source chosen.




D - MOUNTING ADD-ONS

LED - STEM AND ARM ADD-ONS


* FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



LWTM WEATHERTIGHT LED WALL MOUNT



LSLC LED SLOPE CEILING CANOPY



LSTC LED STEM MOUNT CANOPY

UNIVERSAL STEM AND ARM ADD-ONS


* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:

MODEL #: -/-/-(LWTM, TRB 1/2", LGSWL)-/-/-/-/-/-/
A B C D E F G H I J K




CNK CANOPY For MULTIPLE FIXTURES


*CNK dimensions vary on number of fixtures applied



LGSWL 1/2" NPT SWIVEL
For all shades greater than 7" wide in diameter



FH 1/2" FLAT HUB 1/2"
FH 3/4" FLAT HUB 3/4"



TRB 1/2"-4' Cable SUPPORT
TRB 3/4"-4' Cable SUPPORT

F - LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

LIGHT EMITTING DIODE (LED)

- LED 12W (MAX)**- HD10
- LED 25W (MAX)**- HD12, HDG12, HD14
- LED 35W (MAX)**- HD16
- LED 75W (MAX)**- HD18, HD20, HD24, QD16

*IMPORTANT – FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT.

EXAMPLE: / LED25W /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
LED12W	12W	1515	>90	120-277 VAC	0-10V
LED25W	25W	2760	>90	120-277 VAC	0-10V
LED35W	35W	3840	>90	120-277 VAC	0-10V
LED75W	75W	7500	>90	120-277 VAC	0-10V

@3500K

H - ELECTRICAL OPTION

MOST BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES. PLEASE SEE NOTES BELOW AND FOR FURTHER DEATIALS CONTACT THE FACTORY. FOR DIMMING BALLAST OPTION PLEASE CHOOSE MARK X OR MARK VII, SO RESTRICTIONS APPLY DUE TO THE SIZE OF THE BALLAST AND FIXTURE.

LED DIMMING OPTIONS

FOR TRIAC OR 0-10V OPTOIN CHOOSE FROM THE FOLLOWING. CONTACT DRIVER MANUFACTURER FOR SPECIFICATIONS.

- LDM120** - TRIAC DIMMING AT 120 VOLT
- LDM277** - TRIAC DIMMING AT 277 VOLT
- LDM0-10V** - 0 - 10v



I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.



CL3 3" CLEAR GLASS



PR3 3" PRISMATIC GLASS



RE3 3" RED GLASS



BL3 3" BLUE GLASS

CL4 4" CLEAR GLASS

PR4 4" PRISMATIC GLASS

RE4 4" RED GLASS

BL4 4" BLUE GLASS

CLT3 3" CLEAR TEMPERED

CLT4 4" CLEAR TEMPERED



FR3 3" FROSTED GLASS



AH3 3" AMBER HYDE GLASS



GR3 3" GREEN GLASS

FR4 4" FROSTED GLASS


AH4 4" AMBER HYDE GLASS

GR4 4" GREEN GLASS

FRT3 3" FROSTED TEMPERED

FRT4 4" FROSTED TEMPERED

GLASS – DIMENSIONS	
3" GLASS	
Diameter	3.34"
Height	6.93"
Fitter	3.29"
4" GLASS	
Diameter	4.34"
Height	8.37"
Fitter	4.29"



GLASS – MAX WATTAGE	
3" GLASS –	100W INC / LED12W
4" GLASS –	200W INC / LED25W



BA 6" OPAL BALL
(100W INC MAX/LED12W)



BAX 9" CLEAR GLOBE
BAF 9" FROSTED GLOBE
(200W INC MAX/LED25W)



FN 8" CLEAR TEXTURED GLOBE
(150W INC MAX/LED25W)



BA7 7" CLEAR GLOBE



PR8 8" PRISMATIC




OC 8" OPAL TAPERED GLOBE
(60W INC MAX/LED25W)


BA7F 7" FROSTED GLOBE
(100W INC MAX/LED25W)

PR8F 8" PRISMATIC FROSTED
(200W INC MAX/LED45W)


J – ACCESSORIES




- GR10** 10" WIRE GRILL
- GR12** 12" WIRE GRILL
- GR14** 14" WIRE GRILL
- GR16** 16" WIRE GRILL
- GR18** 18" WIRE GRILL
- GR20** 20" WIRE GRILL
- GR24** 24" WIRE GRILL





- LGR10** 10" LOUVERED GRILL
- LGR12** 12" LOUVERED GRILL
- LGR14** 14" LOUVERED GRILL
- LGR16** 16" LOUVERED GRILL
- LGR18** 18" LOUVERED GRILL
- LGR20** 20" LOUVERED GRILL
- LGR24** 24" LOUVERED GRILL




- FGR10** 10" FLAT GRILL
- FGR12** 12" FLAT GRILL
- FGR14** 14" FLAT GRILL
- FGR16** 16" FLAT GRILL
- FGR18** 18" FLAT GRILL
- FGR20** 20" FLAT GRILL
- FGR24** 24" FLAT GRILL



- CRL10** 10" CURVED POLYCARB LENSE
- CRL12** 12" CURVED POLYCARB LENSE
- CRL14** 14" CURVED POLYCARB LENSE
- CRL16** 16" CURVED POLYCARB LENSE
- CRL18** 18" CURVED POLYCARB LENSE
- CRL20** 20" CURVED POLYCARB LENSE
- CRL24** 24" CURVED POLYCARB LENSE




- FLE10** 10" FLAT CLEAR LENSE
- FLE12** 12" FLAT CLEAR LENSE
- FLE14** 14" FLAT CLEAR LENSE
- FLE16** 16" FLAT CLEAR LENSE
- FLE18** 18" FLAT CLEAR LENSE
- FLE20** 20" FLAT CLEAR LENSE
- FLE24** 24" FLAT CLEAR LENSE




REF 9.5" DIAMETER REFRACTOR



UGR U- WIRE GUARD




WG-1 WIRE GUARD




WG-2 WIRE GUARD

Available for shades
12" or higher



GU-1 CAST ALUMINUM GUARD



GU-2 CAST GUARD

Available for shades
12" or higher