



BASELITE STANTON COLLECTION



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	X	/	X	/	X	/
	A	B	C	D	E	F	G	H	I	J	K			
EXAMPLE:	UDC14	78	ST12	LSTC	78	35W	3K	-	-	-	LDM120			

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



UDC20.78.BLC.35WLED.3K

A - SHADES

STANTON SHADE COLLECTION
UDC14 – 35WLED (MAX)
UDC16 – 35WLED (MAX)
UDC20 – 35WLED (MAX)

B - FINISH OPTIONS

(*SEE NOTES FOR LIMITATIONS*)
 (SEE WEBSITE FOR SWATCH COLORS)
44G - GHOST WHITE
78 - CHALKBOARD BLACK (1)
89G - GHOST TAUPE

C – MOUNTING OPTIONS

CORD MOUNT (LED)
 LBLC, LWHC
STEM MOUNT
 ST6, ST12, ST18, ST24, ST36, ST48, STXX

D – MOUNTING ADD-ONS

LED & CF ADD-ONS
 LSTC

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 2 FOR WATTAGE LIMITATIONS)
LIGHT EMITTED DIODE (LED)
 10W, 12W, 25W, 35W

*NOTE – MAX WATTAGE IS LISTED NEXT TO THE SHADE MODEL NUMBER IN SECTION "A". ALL WATTAGES BELOW THAT ARE ALSO AVAILABLE FOR THE SAME MODEL NUMBER.

G – LED COLOR TEMP


(ONLY APPLICABLE FOR LED LIGHT SOURCE. SKIP THIS SECTION IF OPTION DOES NOT APPLY.)
 27K – 2700 K (2)
 3K – 3000 K
 35K – 3500 K
 4K – 4000 K
 5K – 5000 K (2)

K – ELECTRICAL OPTION


LDM120
 LDM277
 LDM0-10

NOTES


- (1). FINISH OPTION 78, ONLY AVAILABLE INSIDE AND OUT OF FIXTURE
- (2). 27K AND 5K ARE NOT COMPATIBLE WITH 75W & 100W LED OPTION. *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.)
- *ALL FIXTURES MOUNT TO A 4-0 JUNCTION BOX
- *FIXTURE DIMENSIONS MAY VARY ± 0.25"

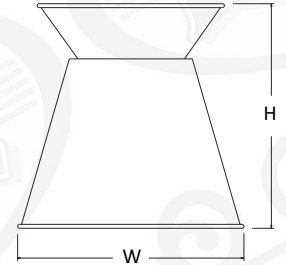

UDC14 H - 14.25" W - 14.5"

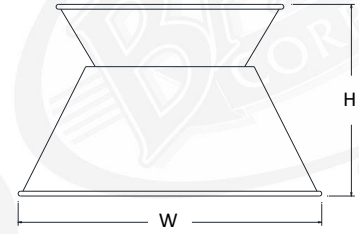

UDC16 H - 10" W - 16"

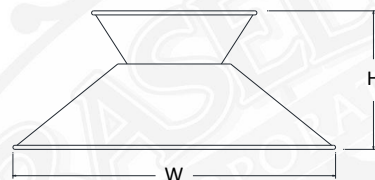

UDC20 H - 8.5" W - 20"



C - MOUNTING OPTIONS

CORD MOUNT (LED)

*FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.
 *CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: 4" (H) 5.5" (W) *CORD AND CANOPY COME IN THE SAME COLOR.



- LBLC** 8' BLACK CORD (INCLUDES LED CANOPY)
- LWHC** 8' WHITE CORD (INCLUDES LED CANOPY)

NOTES:

*DISTANCE TO LAMP (CF) 10'

*All compact fluorescent and LED housings may vary in size according to light source chosen.

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION




ST(XX) STEM- 1/2"

XX = LENGTH OF STEM
 (EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)
 *CANOPY NOT INCLUDED, ADD IN SECTION D
 * 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST

D - MOUNTING ADD-ONS

STEM AND ARM ADD-ONS (LED)

* FOR LED OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



LSTC LED STEM MOUNT CANOPY

F - LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

LIGHT EMITTING DIODE (LED)

LED 35W (MAX)- UDC14, UDC16, UDC20

***IMPORTANT** – FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE MAX WATTAGE AVAILABILITY. **EXAMPLE: /LED75W /**

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
LED10W	10W	1570 1680	>90	120-277 VAC	See section "H"
LED12W	12W	1884 2016	>90	120-277 VAC	See section "H"
LED25W	25W	3925 4200	>90	120-277 VAC	See section "H"
LED35W	35W	5495 5880	>90	120-277 VAC	See section "H"

@3000K @5000K

K – ELECTRICAL OPTION

MOST BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES. PLEASE SEE NOTES BELOW AND FOR FURTHER DEATIALS CONTACT THE FACTORY. FOR DIMMING BALLAST OPTION PLEASE CHOOSE MARK X OR MARK VII, SO RESTRICTIONS APPLY DUE TO THE SIZE OF THE BALLAST AND FIXTURE.

LED DIMMING OPTIONS

FOR TRIAC OR 0-10V OPTOIN CHOOSE FROM THE FOLLOWING. CONTACT DRIVER MANUFACTURER FOR SPECIFICATIONS.

- LDM120** - TRIAC DIMMING AT 120 VOLT
- LDM277** - TRIAC DIMMING AT 277 VOLT
- LDM0-10V** - 0 - 10v