



BASELITE – SPECIALTY SHADE – LED – SPEC SHEET



DSL9/42/E23/CB½"/42/100INC

PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	/	/
EXAMPLE:	A	B	C	D	E	F	G	H	I	J	K
	DSL12	41	E16	CB ½"	43	25W	3K	LDM120	PR3	GU-2	44

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:

A - SHADES

SPECIALTY SHADE SERIES

- CSL7 - 35WLED (MAX)
- DSL9 - 35WLED (MAX)
- DSL12 - 35WLED (MAX)
- AC12 - 35WLED (MAX)

B - FINISH OPTIONS

(*SEE NOTES FOR LIMITATIONS*)
 (SEE WEBSITE FOR SWATCH COLORS)
 38, 40, 41, 42, 43, 44, 45, 46, 48, 49,
 50, 51, 52, 53, 54, 55, 59, 60, 61, 62,
 63, 74, 81, 87, 97

C - MOUNTING OPTIONS

½" ARM EXTENSIONS

- E1, E2, E2S, E3, E4, B1, E16,
E17, E18A, E22, E23, E24

¾" ARM EXTENSIONS

- E3A, E4A, E5, E6, E7, E8, E9,
E10, E11, E12, E13, B15,
E19, E20, E21, E25

E14 - CREATE YOUR OWN

(BASELITE WILL TAKE YOUR SKETCH AND
 FABRICATE A CUSTOM ARM EXTENSION TO
 MEET YOUR NEEDS).

LED CORD MOUNT

- LBLC, LWHC, LTCB, LTCW, LTCHB, LTCHW,
LTLB, LTLW, LTLB, LTLW, LRCB, LRCW,
LRCHB, LRCHW, LFHB, LFHW, LHBLC,
LHWHC, LCBLC, LCWHC

STEM MOUNT

- DP24, ST6, ST12, ST18, ST24, ST36,
ST48, STXX

D - MOUNTING ADD-ONS

LED ADD-ONS

- LWTM, LSLC, LSTC

UNIVERSAL ADD-ONS

- FH ½", FH ¾", TRB ½", TRB ¾",
LGSWL, SMSWL

E - MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F - LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)
LIGHT EMITTED DIODE (LED)
 12W, 25W, 35W

G - LED COLOR TEMP

- 27K - 2700 K
- 3K - 3000 K
- 35K - 3500 K
- 4K - 4000 K
- 5K - 5000 K

H - ELECTRICAL OPTION

(SEE PAGE 4 FOR DIMMING OPTION SPECIFICATIONS)
LDM120
LDM277
LDM10-10

I - GLASS OPTIONS

- CL3, CL4, CLT3, CLT4, BL3, BL4, RE3, RE4,
GR3, GR4, AH3, AH4, FR3, FR4, FRT3, FRT4,
PR3, PR4

J - ACCESSORIES


- GU-1, GU-2, GR12

K - ACCESSORY COLOR


SEE SECTION "B" FOR COLOR
 OPTIONS.

NOTES


- FINISH OPTIONS 38, 40, 49, 54, 61, 62, 63 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
 - FINISH OPTIONS FOR SHADES ≤ 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES > 10" IN DIAMETER ARE WHITE ON THE INSIDE.
 - FINISH OPTIONS 61 AND 62 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
 - COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
- *ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
- *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).
- *ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.
- *FIXTURE DIMENSIONS MAY VARY ± 0.25.
- *CORD AND CANOPY COME IN THE SAME COLOR.



CSL7 H - 6.5" W - 8"



DSL9 H - 7.25" W - 9.5"



AC12 H - 10.75" W - 8"




DSL12 H - 4.5" W - 12"



C - MOUNTING OPTIONS


1/2" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

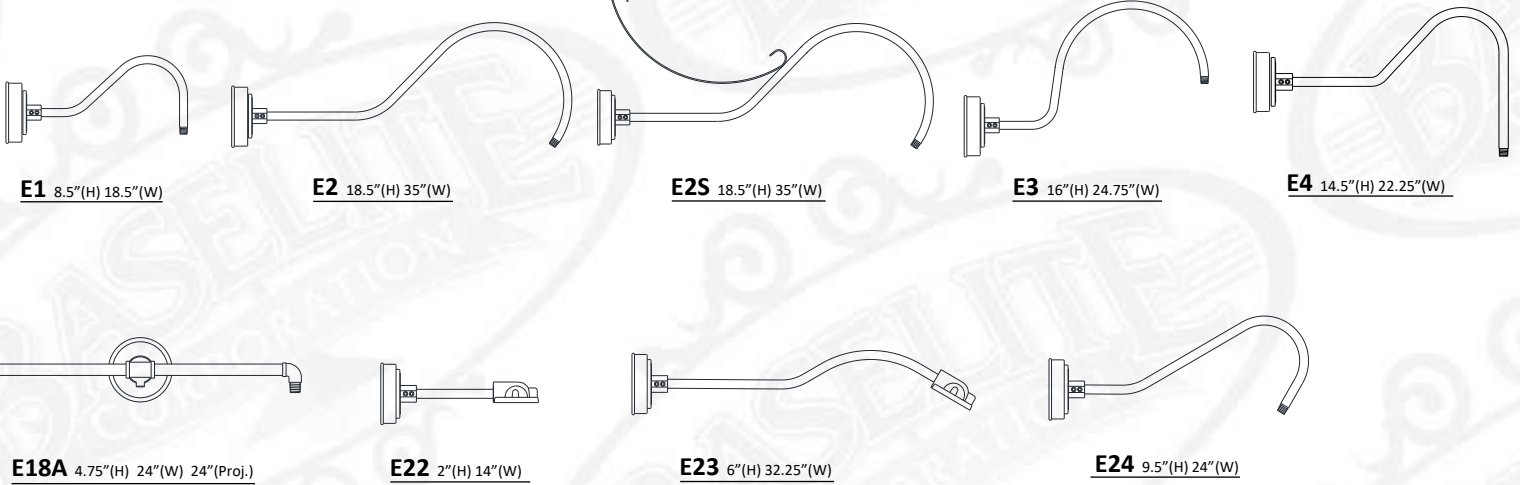

3/4" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

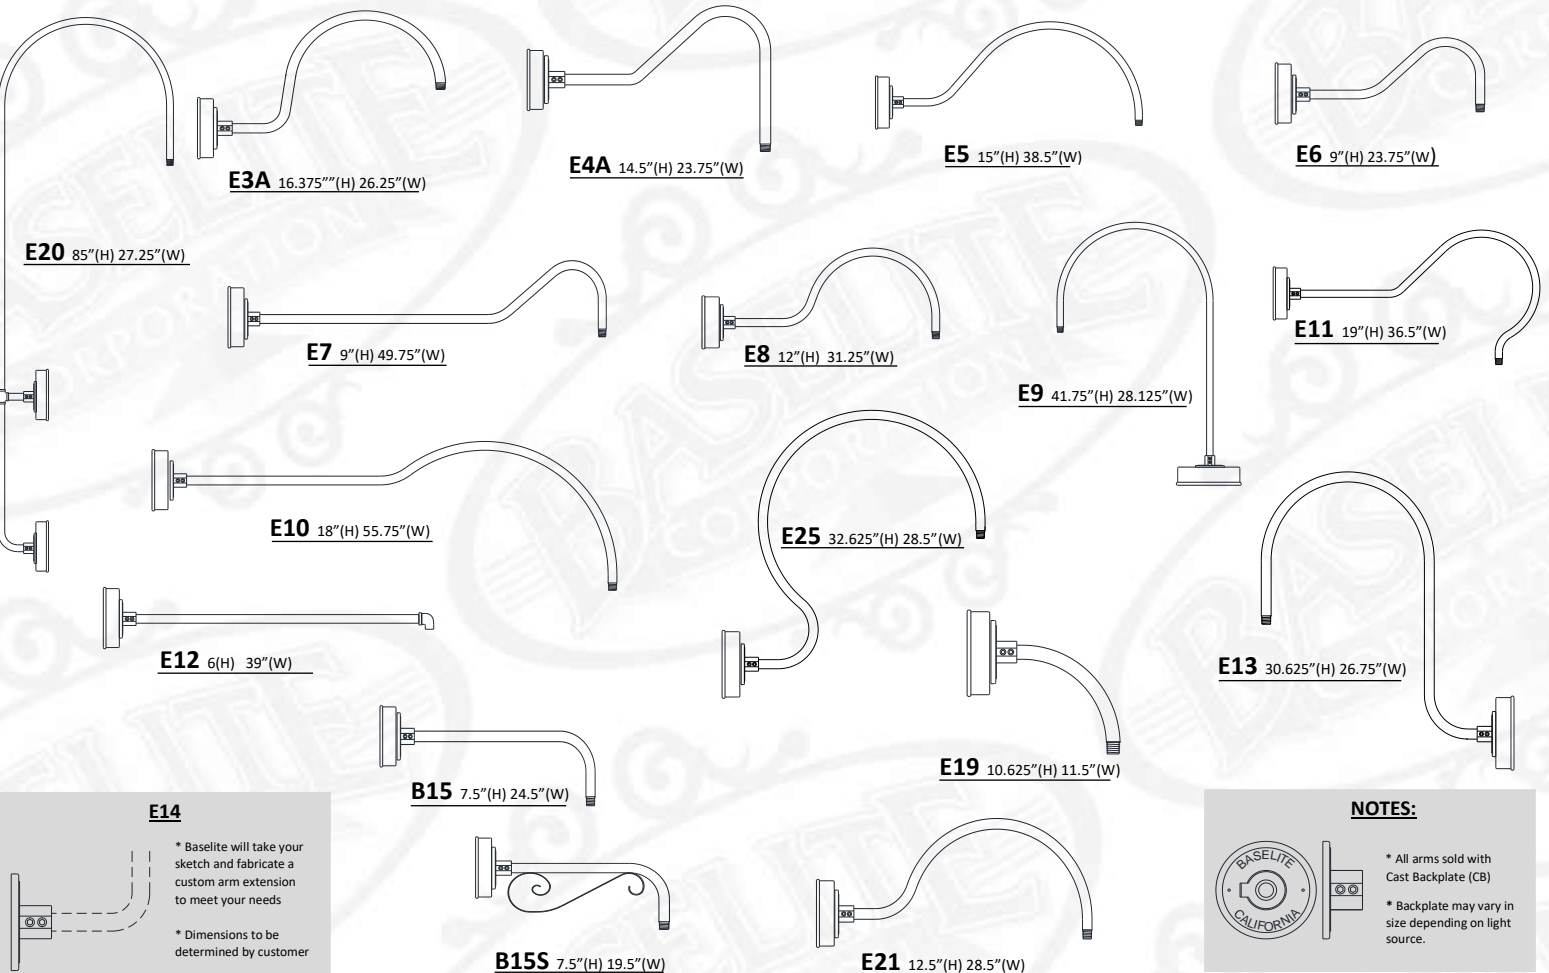


E14

* Baselite will take your sketch and fabricate a custom arm extension to meet your needs

* Dimensions to be determined by customer

NOTES:

 * All arms sold with Cast Backplate (CB)


* Backplate may vary in size depending on light source.



C - MOUNTING OPTIONS (CONTINUED)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

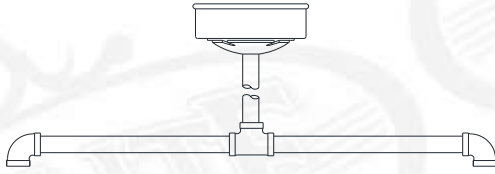

DP24 DOUBLE PENDANT 20"(H) 24"(W)
*DP24 COMES STANDARD WITH LSTC AND ST18



ST(XX) STEM- 1/2" NPT
XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D
* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST

LED CORD MOUNTS

*FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.
*CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: 3" (H) 6" (W) *CORD AND CANOPY COME IN THE SAME COLOR.



LBLC 8' BLACK CORD
LWHC 8' WHITE CORD



LTCB 8' BLACK CORD, CABLE, and LOOP
LTCW 8' WHITE CORD, CABLE, and LOOP



LTCHB 8' BLACK CORD, 3" CHAIN, and LOOP
LTCHW 8' WHITE CORD, 3" CHAIN, and LOOP



LTLB 8' BLACK TELEPHONE CORD AND CABLE
LTLW 8' WHITE TELEPHONE CORD AND CABLE
* Not available with compact fluorescent



LRCB 8' BLACK CORD, CABLE, and LOOP
LRCW 8' WHITE CORD, CABLE, and LOOP



LRCHB 8' BLACK CORD, 3" CHAIN, and LOOP
LRCHW 8' WHITE CORD, 3" CHAIN, and LOOP




LFHB 8' BLACK CORD WITH FLAT HUB
LFWH 8' WHITE CORD WITH FLAT HUB



LCBLC 8' BLACK CORD and CABLE
LCWHC 8' WHITE CORD and CABLE

NOTES:




*DISTANCE TO LAMP (CF) 10'

*All compact fluorescent and LED housings may vary in size according to light source chosen.


D - MOUNTING ADD-ONS (CONTINUED)

LED - STEM AND ARM ADD-ONS


* FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



LWTM WEATHERTIGHT LED WALL MOUNT



LSLC LED SLOPE CEILING CANOPY



LSTC LED STEM MOUNT CANOPY




D - MOUNTING ADD-ONS (CONTINUED)

UNIVERSAL STEM AND ARM ADD-ONS


* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:

MODEL #: -/-/LWTM,TRB 1/2",LGSWL-/-/-/-/


A B C D E F G H I J K



SWL 1/2" NPT swivel
For all arms 7" wide in diameter or smaller



LGSWL 1/2" NPT SWIVEL
For all shades greater than 7" wide in diameter



FH 1/2" FLAT HUB 1/2"
FH 3/4" FLAT HUB 3/4"



TRB 1/2"-4' Cable SUPPORT
TRB 3/4"-4' Cable SUPPORT

F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

LIGHT EMITTING DIODE (LED)

LED 35W (MAX) - CSL7, DSL9, DSL12, AC12

***IMPORTANT** – FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT.

EXAMPLE: / LED25W /

OPTION	WATTAGE	LUMENS		CRI	VOLTAGE	DIMMING
LED12W	12W	1000	1200	>90	120-277 VAC	See section "H"
LED25W	25W	1900	2000	>90	120-277 VAC	See section "H"
LED35W	35W	2800	3000	>90	120-277 VAC	See section "H"
		@3000K	@5000K			

H – ELECTRICAL OPTION

MOST BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES. PLEASE SEE NOTES BELOW AND FOR FURTHER DEATIALS CONTACT THE FACTORY. FOR DIMMING BALLAST OPTION PLEASE CHOOSE MARK X OR MARK VII, SO RESTRICTIONS APPLY DUE TO THE SIZE OF THE BALLAST AND FIXTURE.

LED DIMMING OPTIONS

FOR TRIAC OR 0-10V OPTOIN CHOOSE FROM THE FOLLOWING. CONTACT DRIVER MANUFACTURER FOR SPECIFICATIONS.

LDM120 - TRIAC DIMMING AT 120 VOLT

LDM277 - TRIAC DIMMING AT 277 VOLT

LDM0-10V – 0 – 10v



I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.



CL3 3" CLEAR GLASS
CLT3 3" CLEAR TEMPERED



PR3 3" PRISMATIC GLASS



RE3 3" RED GLASS



BL3 3" BLUE GLASS



FR3 3" FROSTED GLASS
FRT3 3" FROSTED TEMPERED




AH3 3" AMBER HYDE GLASS




GR3 3" GREEN GLASS

GLASS – DIMENSIONS	
3" GLASS	
Diameter	3.34"
Height	6.93"
Fitter	3.29"


GLASS – MAX WATTAGE	
3" GLASS – 100W INC / LED12W	

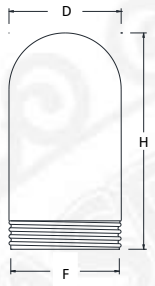


J – ACCESSORIES



GR12 12" WIRE GRILL



GU-1 CAST ALUMINUM GUARD



GU-2 CAST ALUMINUM GUARD