



BASELITE - WAREHOUSE SHADE – INC – SPEC SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	/	/
EXAMPLE:	A W512	B 41	C E16	D SQ ½"	E 43	F 45W	G 3K	H LDM120	I PR3	J GR12	K 44

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



W512/23P/GR12/BLC/100INC

A - SHADES

WAREHOUSE

- W508 - 100WINC (MAX)
- W512 - 100WINC (MAX)
- W514 - 150WINC (MAX)
- W516 - 200WINC (MAX)
- W516X - 200WINC (MAX)
- W518 - 300WINC (MAX)
- W520 - 300WINC (MAX)
- W524 - 300WINC (MAX)
- W527 - 300WINC (MAX)
- W5167 - 200WINC (MAX)
- WC514 - 150WINC (MAX)
- W5206 - 300WINC (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)
(*SEE NOTES FOR LIMITATIONS*)

- 14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB, 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C – MOUNTING OPTIONS

½" ARM EXTENSIONS

- E1, E2, E3, E4, B1, E16, E17, E27

¾" ARM EXTENSIONS

- E3A, E4A, E5, E6, E7, E8, E9, E10, E11, E12, E13, B15, B15S, E19, E20, E21, E25

E14 - CREATE YOUR OWN

(BASELITE WILL TAKE YOUR SKETCH AND FABRICATE A CUSTOM ARM EXTENSION TO MEET YOUR NEEDS).

½" WALL MOUNT

- B13, WM13, WM13R, WM13X, B10, B11, B101

¾" WALL MOUNT

- B9, B9C, B12, WM10, WM11, WM14, WM14X, WM15, WM35X, WM55, WM55X, WM60, WM60X, WM61, WM61X WM70, WM70X, WM71, WM71X

CORD MOUNT

- BLC, WHC, TCB, TCW, TCHB, TCHW, TLB, TLW, TLB, RCB, RCW, RCHB, RCHW, FHB, FHW, HBLC, HWHC, CBLC, CWHC

STEM MOUNT

- ST6, ST12, ST18, ST24, ST36, ST48, STXX

D – MOUNTING ADD-ONS

INC ADD-ONS

- CB1/2", CB3/4", CBC1/2", CBC3/4", SLC1/2", SLC3/4" STC1/2"

UNIVERSAL ADD-ONS

- SQ ½", SQ ¾", FH ½", FH ¾", TRB ½", TRB ¾", SWL, LGSWL, CNK, INB, RINB

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)

INCANDESCENT (INC)

- 100W, 150W, 200W, 300W

G – LED COLOR TEMP

NOT AVAILABLE

H – ELECTRICAL OPTION

NOT AVAILABLE

I – GLASS OPTIONS

- CL3, CL4, CLT3, CLT4, BL3, BL4, RE3, RE4, GR3, GR4, AH3, AH4, FR3, FR4, FRT3, FRT4, PR3, PR4, BA, BAX, BAF, PR8, PR8F, FN, OC

J – ACCESSORIES

- GR8, GR12, GR14, GR16, GR18, GR20, GR24, GR27, REF, UGR, LGR8, LGR12, LGR14, LGR16, LGR18, LGR20, LGR24, LGR27, CRL8, CRL12, CRL14, CRL16, CRL18, CRL20, FLE12, FLE14, FLE16, FLE18, FLE20, FLE24, FLE27, FGR8, FGR12, FGR14, FGR16, FGR18, FGR20, FGR24, FGR27, GU-1, GU-2, WG-1, WG-2

K – ACCESSORY COLOR


SEE SECTION "B" FOR COLOR OPTIONS.

NOTES

- (1). FINISH OPTIONS 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
 - (2). FINISH OPTIONS 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
 - (3). FINISH OPTIONS FOR SHADES ≤ 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES > 10" IN DIAMETER ARE WHITE ON THE INSIDE.
 - (4). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
 - (5). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
- *ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
*ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.)
*ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.
*FIXTURE DIMENSIONS MAY VARY ± 0.25.
*CORD AND CANOPY COME IN THE SAME COLOR.




W508	H-6"	W-8"	W512	H-8"	W-12"
W514	H-9"	W-14"	W516	H-9"	W-16"
W518	H-9"	W-18"	W520	H-10"	W-20"




W524	H-16"	W-24"	W527	H-16"	W-27"
------	-------	-------	------	-------	-------




WC514	H-8"	W-14"
-------	------	-------



W5167	H-7.5"	W-16"
-------	--------	-------



W516X	H-10"	W-16"
-------	-------	-------



W5206	H-11"	W-20"
-------	-------	-------



C - MOUNTING OPTIONS

1/2" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED




E1 8.5"(H) 18.5"(W)



E2 18.5"(H) 35"(W)



E3 16"(H) 24.75"(W)



E4 14.5"(H) 22.25"(W)



B1 4"(H) 12"(W)



E16 4.75"(H) 8.5"(W)




E17 4.75"(H) 9.5"(W)




E27 8.875"(H) 10.5"(W)

3/4" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

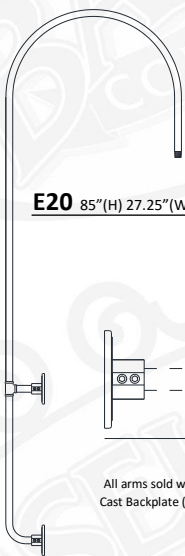


E20 85"(H) 27.25"(W)




E3A 16.375"(H) 26.25"(W)




E4A 14.5"(H) 23.75"(W)



E5 15"(H) 38.5"(W)




E6 9"(H) 23.75"(W)




E9 41.75"(H) 28.125"(W)



E12 6(H) 39"(W)




E7 9"(H) 49.75"(W)




E8 12"(H) 31.25"(W)

Baselite will take your sketch and fabricate a custom arm extension to meet your




B15 7.5"(H) 24.5"(W)

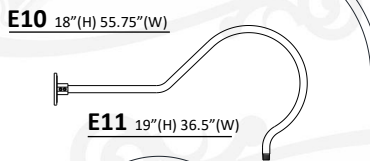

E10 18"(H) 55.75"(W)

E11 19"(H) 36.5"(W)



E25 32.625"(H) 28.5"(W)


All arms sold with Cast Backplate (CB)



B15S 7.5"(H) 19.5"(W)



E21 12.5"(H) 28.5"(W)

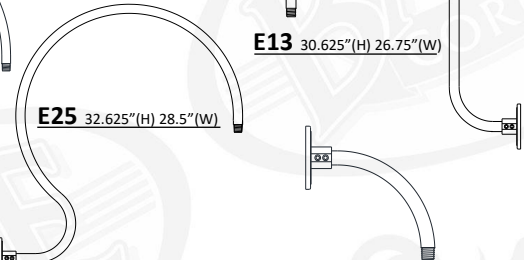

E13 30.625"(H) 26.75"(W)

E19 10.625"(H) 11.5"(W)

1/2" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



B10 6"(H) 12.5"(W)



B101 6"(H) 13.5"(W)




B11 6"(H) 14.5"(W)




B13 6"(H) 16.5"(W)



WM13 12"(H) 9.5"(W)



WM13R 12"(H) 9.5"(W)



WM13X 12"(H) 10.5"(W)

3/4" WALL MOUNTS


*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



B12 6"(H) 15.5"(W)




B9 5"(H) 18"(W)




B9C 5"(H) 18"(W)


*CHAIN HEIGHT TBD BY CUSTOMER



WM14 18"(H) 12"(W)



WM14X 18"(H) 14"(W)




WM15 23"(H) 19.5"(W)



C - MOUNTING OPTIONS (CONTINUED)

3/4" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED

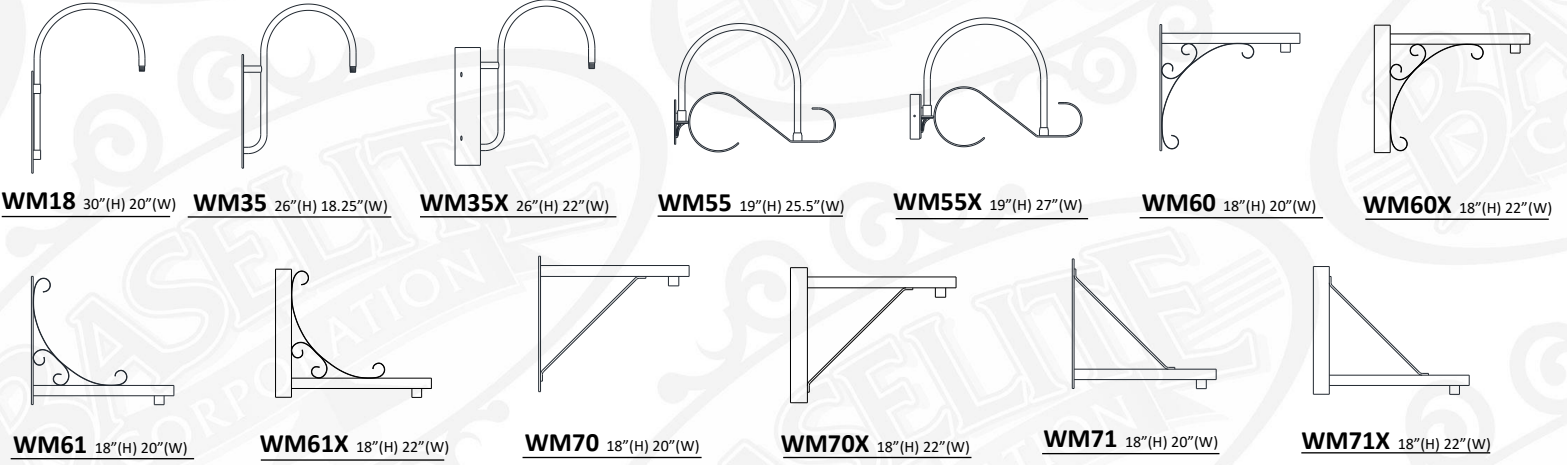

WM18 30"(H) 20"(W)

WM35 26"(H) 18.25"(W)

WM35X 26"(H) 22"(W)

WM55 19"(H) 25.5"(W)

WM55X 19"(H) 27"(W)

WM60 18"(H) 20"(W)

WM60X 18"(H) 22"(W)

WM61 18"(H) 20"(W)

WM61X 18"(H) 22"(W)

WM70 18"(H) 20"(W)


WM70X 18"(H) 22"(W)

WM71 18"(H) 20"(W)

WM71X 18"(H) 22"(W)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

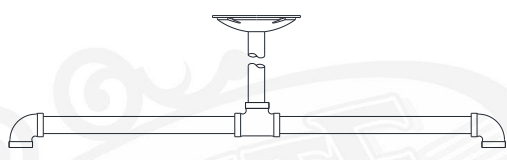

DP24 DOUBLE PENDANT 20"(H) 24"(W)
*DP24 COMES STANDARD WITH STC AND ST18




ST(XX) STEM- 1/2" NPT
XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D
* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST




SC24 SCROLL STEM 33"(H) 24"(W)
*SC24 COMES STANDARD WITH STC

INCANDESCENT CORD MOUNTS

*INCANDESCENT MAX WATTAGE 150 WATT. CALL FACTORY FOR HIGHER WATTAGES. LOOPS, CABLES, AND CHAINS AVAILABLE ONLY FOR INCANDESCENT
*CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: .625" (H) 5.25" (W) *CORD AND CANOPY COME IN THE SAME COLOR.

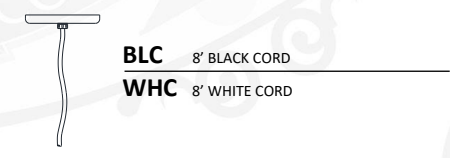

BLC 8' BLACK CORD
WHC 8' WHITE CORD

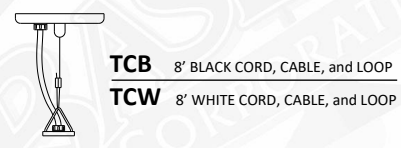


TCB 8' BLACK CORD, CABLE, and LOOP
TCW 8' WHITE CORD, CABLE, and LOOP




TCHB 8' BLACK CORD, 3' CHAIN, and LOOP
TCHW 8' WHITE CORD, 3' CHAIN, and LOOP




TLB 8' BLACK TELEPHONE CORD AND CABLE
TLW 8' WHITE TELEPHONE CORD AND CABLE
* Not available H.I.D.

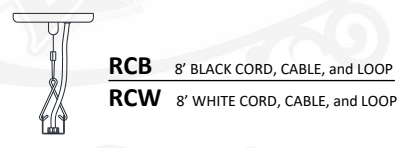


RCB 8' BLACK CORD, CABLE, and LOOP
RCW 8' WHITE CORD, CABLE, and LOOP

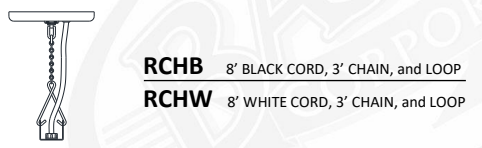

RCHB 8' BLACK CORD, 3' CHAIN, and LOOP
RCHW 8' WHITE CORD, 3' CHAIN, and LOOP

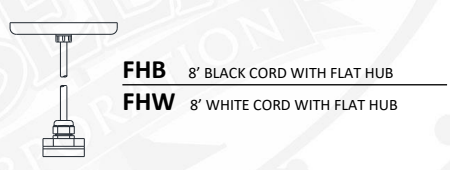

FHB 8' BLACK CORD WITH FLAT HUB
FHW 8' WHITE CORD WITH FLAT HUB

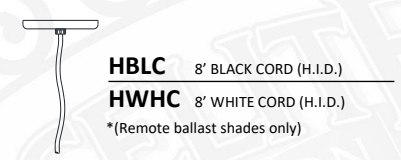

HBLC 8' BLACK CORD (H.I.D.)
HWHC 8' WHITE CORD (H.I.D.)
*(Remote ballast shades only)




CBLC 8' BLACK CORD and CABLE
CWLC 8' WHITE CORD and CABLE




D - MOUNTING ADD-ONS


INCANDESCENT ARM ADD-ONS



CB 1/2" CAST ALUMINUM BACKPLATE 1/2 NPT
CB 3/4" CAST ALUMINUM BACKPLATE 3/4 NPT



CBC 1/2" 1/2" BACKPLATE COVER
CBC 3/4" 3/4" BACKPLATE COVER
* Includes slip ring to hold 1/2" or 3/4" arm extension in place



SLC 1/2" SLOPE CEILING CANOPY 1/2"
SLC 3/4" SLOPE CEILING CANOPY 3/4"
*(Slopes To 20 Degrees)



STC 1/2" 1/2" STEM MOUNT CANOPY

UNIVERSAL STEM AND ARM ADD-ONS


* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:

MODEL #: -/-/LWTM, TRB 1/2", LGSWL -/-/-/-/


A B C D E F G H I J K



CNK CANOPY For MULTIPLE FIXTURES
*CNK dimensions vary on number of fixtures applied



LGSWL 1/2" NPT SWIVEL
For all shades greater than 7" wide in diameter



FH 1/2" FLAT HUB 1/2"
FH 3/4" FLAT HUB 3/4"



TRB 1/2"-4' Cable SUPPORT
TRB 3/4"-4' Cable SUPPORT

F - LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

INCANDESCENT (INC) MED E26

- INC 100W-** W508, W512
- INC 150W-** W514, WC514
- INC 200W-** W516, W516X, W5167
- INC 300W-** W518, W520, W524, W527, W5206

***IMPORTANT** – FOR INCANDESCENT (INC) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT.

EXAMPLE: / INC150W /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
100WINC	100W	PER BULB SPECS	>90	120-277 VAC	N/A
150WINC	150W	PER BULB SPECS	>90	120-277 VAC	N/A
200WINC	200W	PER BULB SPECS	>90	120-277 VAC	N/A
300WINC	300W	PER BULB SPECS	>90	120-277 VAC	N/A



I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.



CL3 3" CLEAR GLASS



PR3 3" PRISMATIC GLASS



RE3 3" RED GLASS



BL3 3" BLUE GLASS

CL4 4" CLEAR GLASS

PR4 4" PRISMATIC GLASS

RE4 4" RED GLASS

BL4 4" BLUE GLASS

CLT3 3" CLEAR TEMPERED

CLT4 4" CLEAR TEMPERED



FR3 3" FROSTED GLASS



AH3 3" AMBER HYDE GLASS



GR3 3" GREEN GLASS

FR4 4" FROSTED GLASS

AH4 4" AMBER HYDE GLASS


GR4 4" GREEN GLASS

FRT3 3" FROSTED TEMPERED

FRT4 4" FROSTED TEMPERED

GLASS – MAX WATTAGE
3" GLASS – 100W INC / LED12W
4" GLASS – 200W INC / LED25W

GLASS – DIMENSIONS	
3" GLASS	
Diameter	3.34"
Height	6.93"
Fitter	3.29"
4" GLASS	
Diameter	4.34"
Height	8.37"
Fitter	4.29"



BA 6" OPAL BALL
(100W INC MAX/LED12W)



BAX 9" CLEAR GLOBE
BAF 9" FROSTED GLOBE
(200W INC MAX/LED25W)



FN 8" CLEAR TEXTURED GLOBE
(150W INC MAX/LED25W)



BA7 7" CLEAR GLOBE



PR8 8" PRISMATIC




OC 8" OPAL TAPERED GLOBE
(60W INC MAX/LED25W)


BA7F 7" FROSTED GLOBE
(100W INC MAX/LED25W)

PR8F 8" PRISMATIC FROSTED
(200W INC MAX/LED45W)


J – ACCESSORIES




GR8 8" WIRE GRILL




LGR8 8" LOUVERED GRILL



FGR8 8" FLAT GRILL



CRL8 8" CURVED POLYCARB LENSE



FLE8 8" FLAT CLEAR LENSE

GR12 12" WIRE GRILL

LGR12 12" LOUVERED GRILL

FGR12 12" FLAT GRILL

CRL12 12" CURVED POLYCARB LENSE

FLE12 12" FLAT CLEAR LENSE

GR14 14" WIRE GRILL

LGR14 14" LOUVERED GRILL

FGR14 14" FLAT GRILL

CRL14 14" CURVED POLYCARB LENSE

FLE14 14" FLAT CLEAR LENSE

GR16 16" WIRE GRILL

LGR16 16" LOUVERED GRILL

FGR16 16" FLAT GRILL

CRL16 16" CURVED POLYCARB LENSE

FLE16 16" FLAT CLEAR LENSE

GR18 18" WIRE GRILL

LGR18 18" LOUVERED GRILL

FGR18 18" FLAT GRILL

CRL18 18" CURVED POLYCARB LENSE

FLE18 18" FLAT CLEAR LENSE

GR20 20" WIRE GRILL

LGR20 20" LOUVERED GRILL

FGR20 20" FLAT GRILL

CRL20 20" CURVED POLYCARB LENSE

FLE20 20" FLAT CLEAR LENSE

GR24 24" WIRE GRILL

LGR24 24" LOUVERED GRILL

FGR24 24" FLAT GRILL


FLE24 24" FLAT CLEAR LENSE

GR27 27" WIRE GRILL

LGR27 27" LOUVERED GRILL

FGR27 27" FLAT GRILL


FLE27 27" FLAT CLEAR LENSE




REF 9.5" DIAMETER REFRACTOR



UGR U- WIRE GUARD




WG-1 WIRE GUARD




WG-2 WIRE GUARD

Available for shades
12" or higher



GU-1 CAST ALUMINUM GUARD



GU-2 CAST GUARD

Available for shades
12" or higher