



BASELITE - HALO COLLECTION – LED – SPEC SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	X	/	X	/	/	/	X	/	X	/	X	/
	A	B	C	D	E	F	G	H	I	J	K				
EXAMPLE:	HLO12	41	LCBLC	-	-	21W	3K	-	-	-	-	LDM120			

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



HLO22. 89G.3LCWHC.33WLED

A - SHADES

HALO COLLECTION

- HLO12 – 21WLED (MAX)
- HLO16 – 27WLED (MAX)
- HLO22 – 33WLED(MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)
(*SEE NOTES FOR LIMITATIONS*)

- 14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB, 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C – MOUNTING OPTIONS

- LED CORD MOUNT**
- 3LCBLC, 3LCWHC

F – LIGHT SOURCE

(SEE PAGE 2 FOR WATTAGE LIMITATIONS)

- LIGHT EMITTED DIODE (LED)**
- 15W, 18W, 21W, 26W, 27W, 33W

G – LED COLOR TEMP

(SEE SECTION G ON PAGE 2 FOR DETAILS.)

- 27K – 2700 K
- 3K – 3000 K
- 35K – 3500 K
- 4K – 4000 K

K – ELECTRICAL OPTION

(SEE SECTION F ON PAGE 2 FOR DETAILS.)


- LDM120
- LDM277
- LDM0-10

NOTES

- (1). FINISH OPTIONS 75,76, 77, 83, 84, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
- (2). FINISH OPTIONS 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- (3). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.

*ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.

*FIXTURE DIMENSIONS MAY VARY ± 0.25.

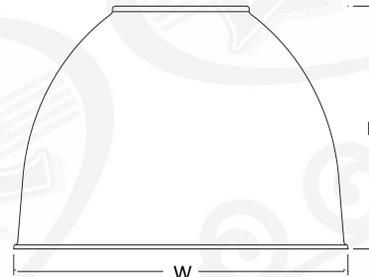


- HLO12** H - 7.625" W - 12.5"
- HLO16** H - 11" W - 16.5"
- HLO22** H - 13.5" W - 22"



C - MOUNTING OPTIONS

LED CORD MOUNTS

*FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.
*CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: 2" (H) 6" (W) *CORD AND CANOPY COME IN THE SAME COLOR.



3LCBLC 8' BLACK CORD and CABLE (INCLUDES LED CANOPY)
3LCWHC 8' WHITE CORD and CABLE (INCLUDES LED CANOPY)

NOTES:
*DISTANCE TO LAMP (CF) 10'
*All compact fluorescent and LED housings may vary in size according to light source chosen.

F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

LIGHT EMITTING DIODE (LED)						
LED 15W or 21W - HLO12 LED 18W or 27W - HLO16 LED 26W or 33W - HLO22			*IMPORTANT – FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT. EXAMPLE: / LED33W /			
OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING	
LED15W	15W	2500	80	120-277 VAC	TRIAC/0-10	
LED18W	18W	3000	80	120-277 VAC	TRIAC/0-10	
LED21W	21W	3258	80	120-277 VAC	TRIAC/0-10	
LED26W	26W	4100	80	120-277 VAC	TRIAC/0-10	
LED27W	27W	4163	80	120-277 VAC	TRIAC/0-10	
LED33W	33W	5088	80	120-277 VAC	TRIAC/0-10	
@4000K						

K – ELECTRICAL OPTION

MOST BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES. PLEASE SEE NOTES BELOW AND FOR FURTHER DEATIALS CONTACT THE FACTORY.
FOR DIMMING BALLAST OPTION PLEASE CHOOSE MARK X OR MARK VII, SO RESTRICTIONS APPLY DUE TO THE SIZE OF THE BALLAST AND FIXTURE.

LED DIMMING OPTIONS
FOR TRIAC OR 0-10V OPTOIN CHOOSE FROM THE FOLLOWING. CONTACT DRIVER MANUFACTURER FOR SPECIFICATIONS.
LDM120 - TRIAC DIMMING AT 120 VOLT
LDM277 - TRIAC DIMMING AT 277 VOLT
LDM0-10V – 0 – 10v