



# BASELITE – P - HP – CF – SPECIFICATION SHEET



PROJECT NAME: \_\_\_\_\_ PROJECT TYPE: \_\_\_\_\_

MODEL #	/	/	/	X	/	/	/	/	/	/	/
A	B	C	D	E	F	G	H	I	J	K	
EXAMPLE: HP2	41	BLC	-	-	25WLED	3K	LDM120	FR4	CG2	41	

\*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:

## A - SHADES

### P-HP SERIES

- P1 - 32WCF (MAX), (3" GLASS), (3" GUARD)
- P2 - 42WCF (MAX), (4" GLASS), (4" GUARD)
- HP1 - 32WCF (MAX), (3" GLASS), (3" GUARD)
- HP2 - 42WCF (MAX), (4" GLASS), (4" GUARD)

## B - FINISH OPTIONS

(\*SEE NOTES FOR LIMITATIONS\*)  
(SEE WEBSITE FOR SWATCH COLORS)

20, 21, 22, 23, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 59, 60, 61, 62, 63, 70, 71, 72, 73

## C - MOUNTING OPTIONS

\* CORD & STEM MOUNTS ONLY.  
NO OTHER MOUNTING APPLIES

**COMPACT FLUORESCENT CORD MOUNT**  
CFBLC, CFWHC, CFTCB, CFTCW, CFTCHB, CFTCHW, CFTLB, CFTLW, CFRCB, CFRCW, CFCRB, CFCRW, CFFHB, CFFHW, CFFHLC, CFWHC, CFCBLC, CFCWHC, CFCHB, CFCHW  
**STEM MOUNT**  
ST6, ST12, ST18, ST24, ST36, ST48, STXX

## D - MOUNTING ADD-ONS

**LED ADD-ONS**  
LWTM, LSLC, LSTC  
**UNIVERSAL ADD-ONS**  
FH ½", FH ¾", LGSWL

## E - MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

## F - LIGHT SOURCE

(SEE PAGE 3 FOR WATTAGE LIMITATIONS)

### COMPACT FLUORESCENT (CF)

26W, 32W, 42W

## G - LED COLOR TEMP

NOT AVAILABLE

## H - ELECTRICAL OPTION

(SEE PAGE 3 FOR DIMMING OPTION SPECIFICATIONS)

CDM120

CDM277

CDM120/277

## I - GLASS OPTIONS

### 3" GLASS

(AVAILABLE FOR P1 & HP1)  
CL3, CLT3, BL3, RE3, GR3,  
AH3, FR3, FRT3, PR3

### 4" GLASS

(AVAILABLE FOR P2 & HP2)  
CL4, CLT4, BL4, RE4, GR4,  
AH4, FR4, FRT4, PR4

## J - ACCESSORIES

### 3" GUARDS

(AVAILABLE FOR P1 & HP1)

CG1, WG1

### 4" GUARDS

(AVAILABLE FOR P2 & HP2)

CG2, WG2

## K - ACCESSORY COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

## NOTES

- (1). FINISH OPTIONS 40, 49, 54, 61, 62, 63, 70, 71, 72, 73 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- (2). FINISH OPTIONS FOR SHADES  $\leq$  10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES  $>$  10" IN DIAMETER ARE WHITE ON THE INSIDE.
- (3). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.

\*ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFVTM, ECT.).

\*ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE.  
(EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).

\*ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.


\*FIXTURE DIMENSIONS MAY VARY  $\pm$  0.25.

\*CORD AND CANOPY COME IN THE SAME COLOR.

\*RATED FOR WET LOCATION.




HP2/62/BLC/100WINC/FR4/CG2/62



**P1** H - 9.625" W - 4"

**P2** H - 12" W - 5.5"

3" GLASS & 3" GUARD AVAILABLE FOR P1  
4" GLASS & 4" GUARD AVAILABLE FOR P2



**HP1** H - 9.625" W - 8"

**HP2** H - 12" W - 10"

3" GLASS & 3" GUARD AVAILABLE FOR HP1

4" GLASS & 4" GUARD AVAILABLE FOR HP2



## C - MOUNTING OPTIONS

## STEM MOUNTS

\*STEMS RATED FOR DAMP LOCATION



## ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM  
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)  
\*CANOPY NOT INCLUDED, ADD IN SECTION D  
\* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST

## COMPACT FLUORESCENT CORD MOUNTS

FOR LED &amp; COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.

\*CORDS RATED FOR DRY LOCATION

\*CANOPY DIMENSIONS: 4" (H) 5.5" (W)

\*CORD AND CANOPY COME IN THE SAME COLOR.



**CFBLC** 8' BLACK CORD  
**CFWHC** 8' WHITE CORD



**CFTCB** 8' BLACK CORD, CABLE, and LOOP  
**CFTCW** 8' WHITE CORD, CABLE, and LOOP



**CFTCHB** 8' BLACK CORD, 3' CHAIN, and LOOP  
**CFTCHW** 8' WHITE CORD, 3' CHAIN, and LOOP



**CFRCB** 8' BLACK CORD, CABLE, and LOOP  
**CFRCW** 8' WHITE CORD, CABLE, and LOOP



**CFRCHB** 8' BLACK CORD, 3' CHAIN, and LOOP  
**CFRCHW** 8' WHITE CORD, 3' CHAIN, and LOOP



**CFCHB** 8' BLACK CORD, 3' CHAIN, and LOOP  
**CFCHW** 8' WHITE CORD, 3' CHAIN, and LOOP


\* Loop may vary due to shade style



**CFFHB** 8' BLACK CORD WITH FLAT HUB  
**CFFHW** 8' WHITE CORD WITH FLAT HUB



**CFCBLC** 8' BLACK CORD and CABLE  
**CFCWHC** 8' WHITE CORD and CABLE

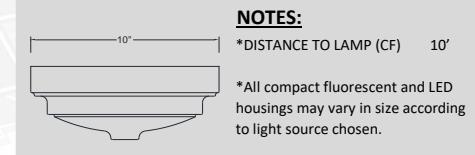

## NOTES:




\*DISTANCE TO LAMP (CF) 10'

\*All compact fluorescent and LED housings may vary in size according to light source chosen.

## D - MOUNTING ADD-ONS

## LED - STEM AND ARM ADD-ONS

\* FOR LED &amp; COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.

**LWTM** WEATHERTIGHT LED WALL MOUNT**LSCL** LED SLOPE CEILING CANOPY**LSTC** LED STEM MOUNT CANOPY




## D – MOUNTING ADD-ONS (CONTINUED)

## UNIVERSAL STEM AND ARM ADD-ONS

\* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:

MODEL #: -/-/-/-LWTM. TRB 1/2". LGSWL/-/-/-/-/-/-  
 A B C D E F G H I J K

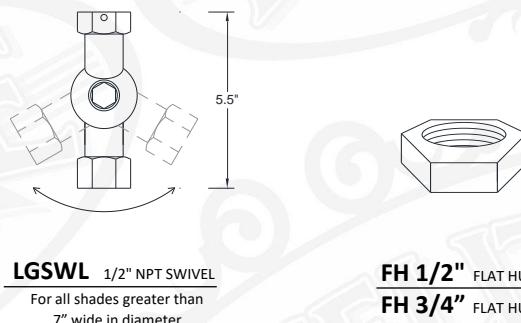**LGSWL** 1/2" NPT SWIVELFor all shades greater than  
7" wide in diameter**FH 1/2"** FLAT HUB 1/2"**FH 3/4"** FLAT HUB 3/4"

## F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

## COMPACT FLUORESCENT (CF)

**CF 26W, 32W(MAX) - P1, HP1**  
**CF 26W, 32W, OR 42(MAX) - P2, HP2**

**\*IMPORTANT** – FOR COMPACT FLUORESCENT (CF) LIGHT SOURCE, FIXTURES ARE LIMITED DUE TO THE SIZE OF THE SHADE. PLEASE SEE THE CHART TO THE LEFT TO SEE WHAT WATTAGE IS COMPARABLE FOR EACH FIXTURE WHEN ORDERING.

EXAMPLE: / CF42W /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
CF26W	26W	PER BULB SPECS	>90	120-277 VAC	See section "H"
CF32W	32W	PER BULB SPECS	>90	120-277 VAC	See section "H"
CF42W	42W	PER BULB SPECS	>90	120-277 VAC	See section "H"

## H – ELECTRICAL OPTION

MOST BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES. PLEASE SEE NOTES BELOW AND FOR FURTHER DETAILS CONTACT THE FACTORY. FOR DIMMING BALLAST OPTION, PLEASE CHOOSE MARK X OR MARK VII, SO RESTRICTIONS APPLY DUE TO THE SIZE OF THE BALLAST AND FIXTURE.

COMPACT FLUORESCENT DIMMING OPTIONS

PROVIDED WITH ADVANCE TRANSFORMER, PLEASE CHOOSE MARK 10 OR MARK 7 WITH SPECIFIED VOLTAGE FROM THE LIST BELOW. CONTACT BALLAST MANUFACTURER FOR SPECIFICATIONS.

**CDM7-120/277** - ADVANCE MARK 7 0-10v ELECTRICAL BALLST – 120/277 VOLT

**CDM10-120** - ADVANCE MARK 10 ELECTRICAL BALLST – 120 VOLT

**CDM10-277** - ADVANCE MARK 10 ELECTRICAL BALLST – 277 VOLT



## BASELITE VAPOR JAR CATALOG

PROJECT NAME: \_\_\_\_\_  
PROJECT TYPE: \_\_\_\_\_

### I – GLASS OPTIONS

\*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.  
\*3" GLASS AVAILABLE FOR P1 & HP1      \*4" GLASS AVAILABLE FOR P2 & HP2



**CL3** 3" CLEAR GLASS

**CL4** 4" CLEAR GLASS

**CLT3** 3" CLEAR TEMPERED

**CLT4** 4" CLEAR TEMPERED



**PR3** 3" PRISMATIC GLASS

**PR4** 4" PRISMATIC GLASS



**RE3** 3" RED GLASS

**RE4** 4" RED GLASS



**BL3** 3" BLUE GLASS

**BL4** 4" BLUE GLASS



**FR3** 3" FROSTED GLASS

**FR4** 4" FROSTED GLASS

**FRT3** 3" FROSTED TEMPERED

**FRT4** 4" FROSTED TEMPERED



**AH3** 3" AMBER HYDE GLASS

**AH4** 4" AMBER HYDE GLASS



**GR3** 3" GREEN GLASS

**GR4** 4" GREEN GLASS

GLASS – DIMENSIONS	
3" GLASS	
Diameter	3.34"
Height	6.93"
Fitter	3.29"
4" GLASS	
Diameter	4.34"
Height	8.37"
Fitter	4.29"




GLASS – MAX WATTAGE  
3" GLASS – 100W INC / LED12W  
4" GLASS – 200W INC / LED25W


### J – ACCESSORIES

\* 3" GUARDS AVAILABLE FOR P1 & HP1


\*4" GUARDS AVAILABLE FOR P2 & HP2




**WG1** 3" WIRE GUARD



**WG2** 4" WIRE GUARD



**CG1** 3" CAST GUARD



**CG2** 4" CAST GUARD