



BASELITE – WCG – INC – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	/	X	/
EXAMPLE:	A	B	C	D	E	F	G	H	I	J	K	
	WCG12	41	E16	CB ½"	43	45W	3K	LDM120	PR3	-	44	

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



WCG14/74/ST18/STC/74/100INC/PR3

A - SHADES

WCG SERIES

- WCG12** - 100WINC (MAX), (3" GLASS), (3" GUARD)
- WCG14** - 100WINC (MAX), (3" GLASS), (3" GUARD)
- WCG16** - 100WINC (MAX), (3" GLASS), (3" GUARD)
- WCG20** - 100WINC (MAX), (3" GLASS), (3" GUARD)
- WCG24** - 200WINC (MAX), (4" GLASS), (4" GUARD)

B - FINISH OPTIONS

- (*SEE NOTES FOR LIMITATIONS*)
 (SEE WEBSITE FOR SWATCH COLORS)
- 20, 21, 22, 23, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 59, 60, 61, 62, 63, 70, 71, 72, 73

C – MOUNTING OPTIONS

½" ARM EXTENSIONS
 E1, E3, E4, B1, E16, E17

¾" ARM EXTENSIONS
 E3A, E4A, E5, E6, E7, E8, E9, E10, E11, E12, E13, B15, B15S, E19, E20, E21, E25

E14 - CREATE YOUR OWN
 (BASELITE WILL TAKE YOUR SKETCH AND FABRICATE A CUSTOM ARM EXTENSION TO MEET YOUR NEEDS).

CORD MOUNT
 BLC, WHC, TCB, TCW, TCHB, TCHW, TLB, TLW, TLB, TLW, RCB, RCW, RCHB, RCHW, FHB, FHW, CBLC, CWHC, CHB, CHW

STEM MOUNT
 DP24, ST6, ST12, ST18, ST24, ST36, ST48, STXX

D – MOUNTING ADD-ONS

INC ADD-ONS
 CB1/2", CB3/4", CBC3/2", CBC3/4", SLC1/2" SLC3/4" STC1/2"

UNIVERSAL ADD-ONS
 FH ½", FH ¾", LGSWL

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)
INCANDESCENT (INC)
 100W, 150W, 200W

G – LED COLOR TEMP

NOT AVAILABLE

H – ELECTRICAL OPTION

NOT AVAILABLE

I – GLASS OPTIONS

CL3, CLT3, BL3, RE3, GR3, AH3, FR3, FRT3, PR3

J – ACCESSORIES


NOT AVAILABLE

K – ACCESSORY COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

NOTES

- FINISH OPTIONS 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
 - FINISH OPTIONS 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
 - FINISH OPTIONS FOR SHADES ≤ 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES > 10" IN DIAMETER ARE WHITE ON THE INSIDE.
 - FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
 - COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
- *ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
- *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.)
- *ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.
- *FIXTURE DIMENSIONS MAY VARY ± 0.25.
- *CORD AND CANOPY COME IN THE SAME COLOR.
- *RATED FOR WET LOCATION.




WCG12	H - 9.625"	W - 12"
WCG14	H - 10"	W - 14"
WCG16	H - 10.5"	W - 16"
WCG20	H - 10.875"	W - 20"
WCG24	H - 12"	W - 24"



C - MOUNTING OPTIONS


1/2" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

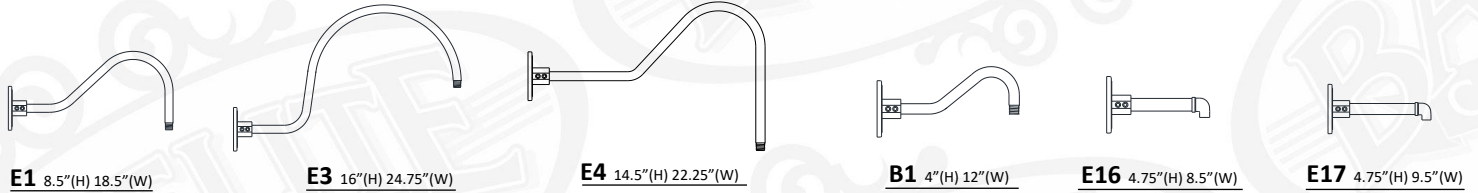

3/4" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

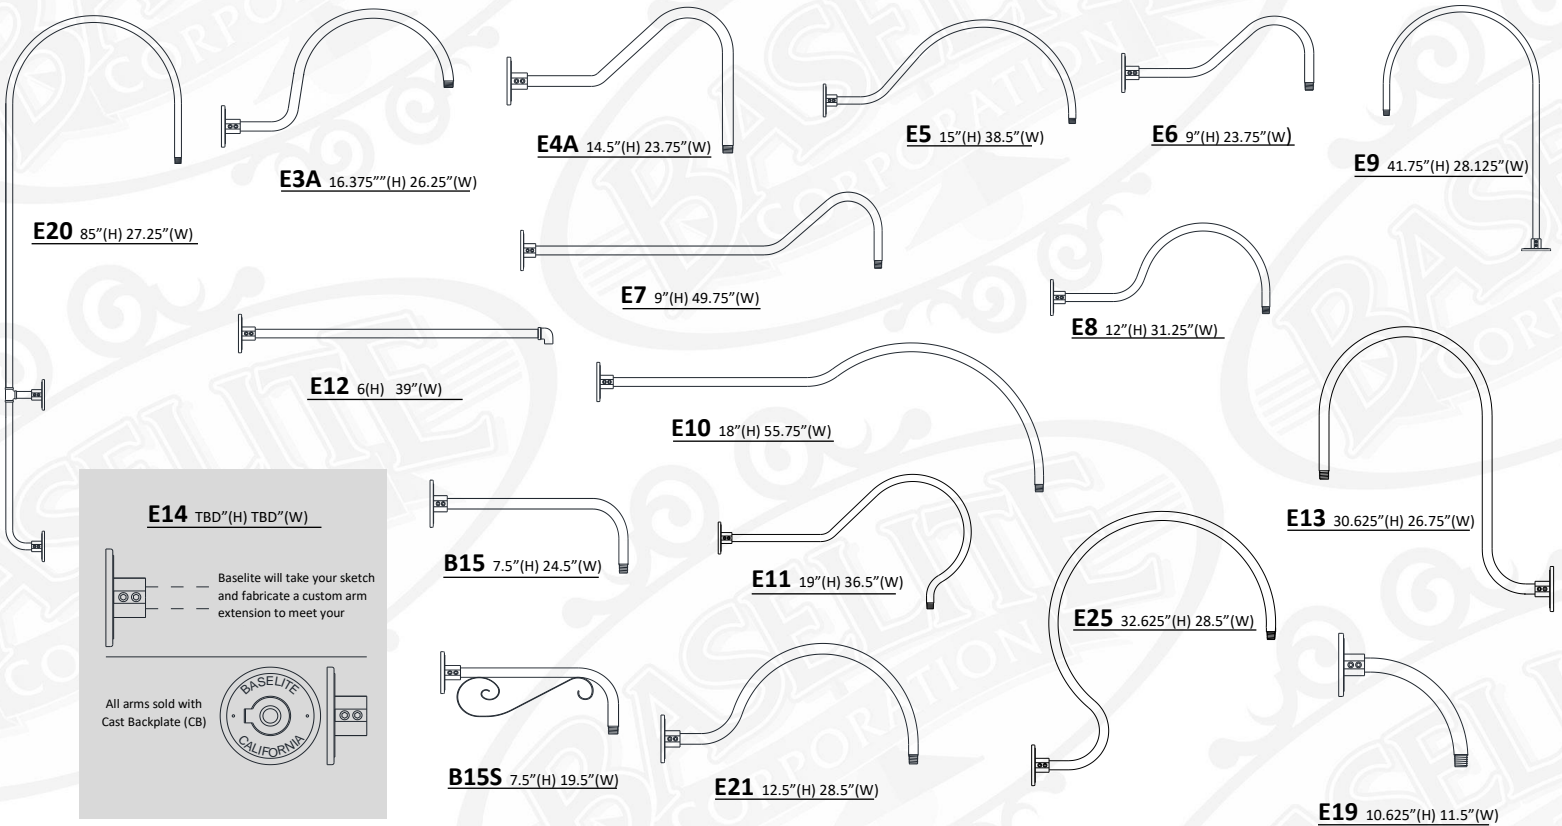


E14 TBD"(H) TBD"(W)

Baselite will take your sketch and fabricate a custom arm extension to meet your

All arms sold with Cast Backplate (CB)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

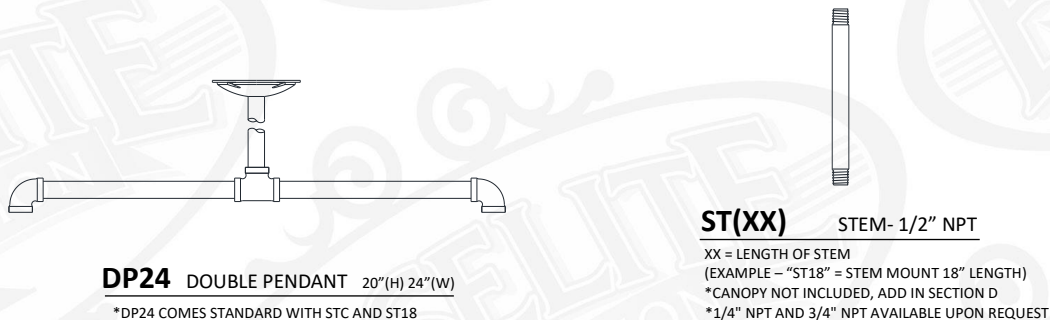




C - MOUNTING OPTIONS (CONTINUED)

INCANDESCENT CORD MOUNTS

*INCANDESCENT MAX WATTAGE 150 WATT. CALL FACTORY FOR HIGHER WATTAGES. LOOPS, CABLES, AND CHAINS AVAILABLE ONLY FOR INCANDESCENT
*CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: .625" (H) 5.25" (W) *CORD AND CANOPY COME IN THE SAME COLOR.



BLC 8' BLACK CORD
WHC 8' WHITE CORD




TCB 8' BLACK CORD, CABLE, and LOOP
TCW 8' WHITE CORD, CABLE, and LOOP



TCHB 8' BLACK CORD, 3' CHAIN, and LOOP
TCHW 8' WHITE CORD, 3' CHAIN, and LOOP




TLB 8' BLACK TELEPHONE CORD AND CABLE
TLW 8' WHITE TELEPHONE CORD AND CABLE
* Not available H.I.D.



RCB 8' BLACK CORD, CABLE, and LOOP
RCW 8' WHITE CORD, CABLE, and LOOP



RCHB 8' BLACK CORD, 3' CHAIN, and LOOP
RCHW 8' WHITE CORD, 3' CHAIN, and LOOP



FHB 8' BLACK CORD WITH FLAT HUB
FHW 8' WHITE CORD WITH FLAT HUB




CBLC 8' BLACK CORD and CABLE
CWLC 8' WHITE CORD and CABLE




CHB 8' BLACK CORD, 3' CHAIN, and LOOP
CHW 8' WHITE CORD, 3' CHAIN, and LOOP
* Loop may vary due to shade style

D - MOUNTING ADD-ONS


INCANDESCENT ARM ADD-ONS




CB 1/2" CAST ALUMINUM BACKPLATE 1/2 NPT
CB 3/4" CAST ALUMINUM BACKPLATE 3/4 NPT



CBC 1/2" 1/2" BACKPLATE COVER
CBC 3/4" 3/4" BACKPLATE COVER
* Includes slip ring to hold 1/2" or 3/4" arm extension in place



SLC 1/2" SLOPE CEILING CANOPY 1/2"
SLC 3/4" SLOPE CEILING CANOPY 3/4"
*(Slopes To 20 Degrees)




STC 1/2" 1/2" STEM MOUNT CANOPY


UNIVERSAL STEM AND ARM ADD-ONS

* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:

MODEL #: -/-/LWTM, TRB 1/2", LGSWL/-/-/-/-/-/
A B C D E F G H I J K



LGSWL 1/2" NPT SWIVEL
For all shades greater than 7" wide in diameter



FH 1/2" FLAT HUB 1/2"
FH 3/4" FLAT HUB 3/4"



F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

INCANDESCENT (INC) <small>MED E26</small>					
INC 100W - WCG12, WCG14, WCG16, WCG20 INC 200W - WCG24			<i>*IMPORTANT</i> – FOR INCANDESCENT (INC) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT. EXAMPLE: / INC150W /		
OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
100W INC	100W	PER BULB SPECS	>90	120-277 VAC	N/A
150W INC	150W	PER BULB SPECS	>90	120-277 VAC	N/A
200W INC	200W	PER BULB SPECS	>90	120-277 VAC	N/A

I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.



CL3 3" CLEAR GLASS
CL4 4" CLEAR GLASS



PR3 3" PRISMATIC GLASS
PR4 4" PRISMATIC GLASS



RE3 3" RED GLASS
RE4 4" RED GLASS



BL3 3" BLUE GLASS
BL4 4" BLUE GLASS



FR3 3" FROSTED GLASS
FR4 4" FROSTED GLASS




AH3 3" AMBER HYDE GLASS
AH4 4" AMBER HYDE GLASS



GR3 3" GREEN GLASS
GR4 4" GREEN GLASS

GLASS – DIMENSIONS	
3" GLASS	
Diameter	3.34"
Height	6.93"
Fitter	3.29"
4" GLASS	
Diameter	4.34"
Height	8.37"
Fitter	4.29"



GLASS – MAX WATTAGE	
3" GLASS	– 100W INC / LED12W
4" GLASS	– 200W INC / LED25W