



BASELITE - URBAN – CF – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	/	/
EXAMPLE:	A UR14	B 41	C E16	D SQ ½"	E 43	F 45W	G 3K	H LDM120	I PR3	J GR14	K 44

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



UR14/61/BLC/BAX/100INC

A - SHADES

URBAN

- UR10 - 32WCF (MAX)
- UR14 - 42WCF (MAX)
- UR16 - 42WCF (MAX)
- URW16 - 42WCF (MAX)
- URW18 - 42WCF (MAX)
- URW20 - 42WCF (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)
 (*SEE NOTES FOR LIMITATIONS*)
 14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB, 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C – MOUNTING OPTIONS

- ½" ARM EXTENSIONS**
E1, E2, E3, E4, B1, E16, E17, E27
- ¾" ARM EXTENSIONS**
E3A, E4A, E5, E6, E7, E8, E9, E10, E11, E12, E13, B15, B15S, E19, E20, E21, E25
- E14 - CREATE YOUR OWN**
(BASELITE WILL TAKE YOUR SKETCH AND FABRICATE A CUSTOM ARM EXTENSION TO MEET YOUR NEEDS).
- ½" WALL MOUNT**
B13, WM13R, WM13X, B10, B11, B101
- ¾" WALL MOUNT**
B9, B9C, B12, WM10, WM11, WM14X, WM15, WM35X, WM55X, WM60X, WM61X WM70X, WM71X
- COMPACT FLUORESCENT CORD MOUNT**
CFBLC, CFWHC, CFTCB, CFTCW, CFTCHB, CFTCHW, CFTLB, CFTLW, CFRCB, CFRCW, CFRCHB, CFRCHW, CFFHB, CFFHW, CFHBLC, CFHWHC, CFCBLC, CFCWHC, CFCWB, CFCWH
- STEM MOUNT**
ST6, ST12, ST18, ST24, ST36, ST48, STXX

D – MOUNTING ADD-ONS

- CF ADD-ONS**
CFWTM, CFSLC, CFSTC
- UNIVERSAL ADD-ONS**
SQ ½", SQ ¾", FH ½", FH ¾", TRB ½", TRB ¾", SWL, LGSWL, CNK, INB, RINB

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)
COMPACT FLUORESCENT (CF)
 26W, 32W, 42W

G – LED COLOR TEMP

NOT AVAILABLE

H – ELECTRICAL OPTION

(SEE PAGE 4 FOR DIMMING OPTION SPECIFICATIONS)
CDM120
CDM277
CDM120/277

I – GLASS OPTIONS

- CL3, CL4, CLT3, CLT4, BL3, BL4, RE3, RE4, GR3, GR4, AH3, AH4, FR3, FR4, FRT3, FRT4, PR3, PR4, BA, BAX, BAF, PR8, PR8F, FN, OC

J – ACCESSORIES


- GR10, GR14, GR16, GR18, GR20, REF, UGR, LGR10, LGR14, LGR16, LGR18, LGR20, CRL10, CRL14, CRL16, CRL18, CRL20, FLE10, FLE14, FLE16, FLE18, FLE20, FGR10, FGR14, FGR16, FGR18, FGR20, GU-1, GU-2, WG-1, WG-2

K – ACCESSORY COLOR


SEE SECTION "B" FOR COLOR OPTIONS.

NOTES


- FINISH OPTIONS 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
- FINISH OPTIONS 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- FINISH OPTIONS FOR SHADES ≤ 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES > 10" IN DIAMETER ARE WHITE ON THE INSIDE.
- COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
 *ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
 *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.)
 *ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.
 *FIXTURE DIMENSIONS MAY VARY ± 0.25.
 *CORD AND CANOPY COME IN THE SAME COLOR.

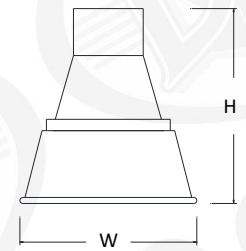


UR10 H-11" W-10"

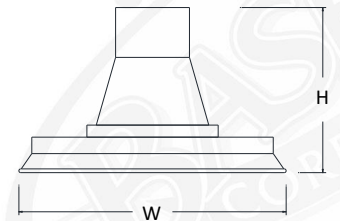

UR14 H-8.75" W-14"

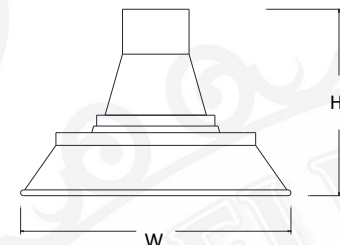

UR16 H-11" W-16"

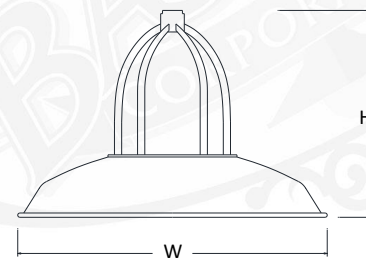


URW16 H-12" W-16"
 URW18 H-12" W-18"
 URW20 H-15.5" W-20"




C - MOUNTING OPTIONS

1/2" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED




E1 8.5"(H) 18.5"(W)

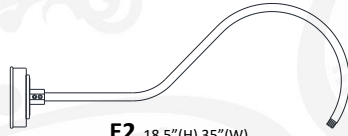


E2 18.5"(H) 35"(W)




E3 16"(H) 24.75"(W)




E4 14.5"(H) 22.25"(W)




B1 4"(H) 12"(W)



E16 4.75"(H) 8.5"(W)




E17 4.75"(H) 9.5"(W)




E27 9"(H) 12.25"(W)

3/4" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED




E20 85"(H) 27.25"(W)




E3A 16.375"(H) 26.25"(W)




E4A 14.5"(H) 23.75"(W)




E5 15"(H) 38.5"(W)




E6 9"(H) 23.75"(W)




E9 41.75"(H) 28.125"(W)

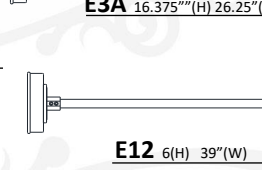

E12 6(H) 39"(W)

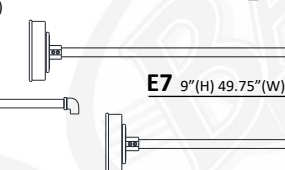


E7 9"(H) 49.75"(W)




E8 12"(H) 31.25"(W)




Baselite will take your sketch and fabricate a custom arm extension to meet your



B15 7.5"(H) 24.5"(W)



E11 19"(H) 36.5"(W)



E25 32.625"(H) 28.5"(W)



All arms sold with Cast Backplate (CB)




B15S 7.5"(H) 19.5"(W)



E21 12.5"(H) 28.5"(W)



E19 10.625"(H) 11.5"(W)

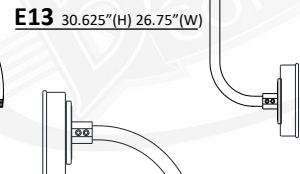


E13 30.625"(H) 26.75"(W)

1/2" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



B10 6"(H) 12.5"(W)




B101 6"(H) 13.5"(W)




B11 6"(H) 14.5"(W)



B13 6"(H) 16.5"(W)



WM13R 12"(H) 9.5"(W)



WM13X 12"(H) 10.5"(W)

3/4" WALL MOUNTS


*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



B12 6"(H) 15.5"(W)




B9 5"(H) 18"(W)



B9C 5"(H) 18"(W)

*CHAIN HEIGHT TBD BY CUSTOMER



WM14X 18"(H) 14"(W)



WM15 23"(H) 19.5"(W)



C - MOUNTING OPTIONS (CONTINUED)

3/4" WALL MOUNTS


*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED




WM35X 26"(H) 22"(W)




WM55X 19"(H) 27"(W)




WM60X 18"(H) 22"(W)



WM61X 18"(H) 22"(W)




WM70X 18"(H) 22"(W)



WM71X 18"(H) 22"(W)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

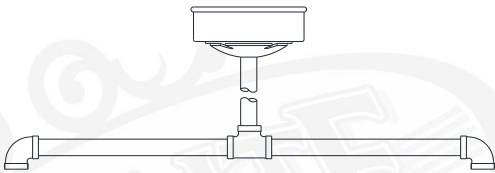

DP24 DOUBLE PENDANT 20"(H) 24"(W)

*DP24 COMES STANDARD WITH CFSTC AND ST18



ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D

* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST



SC24 SCROLL STEM 33"(H) 26"(W)

*SC24 COMES STANDARD WITH CFSTC

COMPACT FLUORESCENT CORD MOUNTS

*FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.

*CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: 4" (H) 5.5" (W) *CORD AND CANOPY COME IN THE SAME COLOR.



CFBLC 8' BLACK CORD
CFWHC 8' WHITE CORD



CFTCB 8' BLACK CORD, CABLE, and LOOP
CFTCW 8' WHITE CORD, CABLE, and LOOP



CFTCHB 8' BLACK CORD, 3' CHAIN, and LOOP
CFTCHW 8' WHITE CORD, 3' CHAIN, and LOOP



CFRCB 8' BLACK CORD, CABLE, and LOOP
CFRCW 8' WHITE CORD, CABLE, and LOOP



CFRCHB 8' BLACK CORD, 3' CHAIN, and LOOP
CFRCHW 8' WHITE CORD, 3' CHAIN, and LOOP




CFCHB 8' BLACK CORD, 3' CHAIN, and LOOP
CFCHW 8' WHITE CORD, 3' CHAIN, and LOOP
* Loop may vary due to shade style



CFFHB 8' BLACK CORD WITH FLAT HUB
CFFHW 8' WHITE CORD WITH FLAT HUB



CFCBLC 8' BLACK CORD and CABLE
CFCWHC 8' WHITE CORD and CABLE



NOTES:

*DISTANCE TO LAMP (CF) 10"

*All compact fluorescent and LED housings may vary in size according to light source chosen.



I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.



CL3 3" CLEAR GLASS



PR3 3" PRISMATIC GLASS



RE3 3" RED GLASS



BL3 3" BLUE GLASS

CL4 4" CLEAR GLASS

PR4 4" PRISMATIC GLASS

RE4 4" RED GLASS

BL4 4" BLUE GLASS

CLT3 3" CLEAR TEMPERED

CLT4 4" CLEAR TEMPERED



FR3 3" FROSTED GLASS



AH3 3" AMBER HYDE GLASS



GR3 3" GREEN GLASS

FR4 4" FROSTED GLASS


AH4 4" AMBER HYDE GLASS

GR4 4" GREEN GLASS

FRT3 3" FROSTED TEMPERED

FRT4 4" FROSTED TEMPERED

GLASS – DIMENSIONS	
3" GLASS	
Diameter	3.34"
Height	6.93"
Fitter	3.29"
4" GLASS	
Diameter	4.34"
Height	8.37"
Fitter	4.29"



GLASS – MAX WATTAGE	
3" GLASS	– 100W INC / LED12W
4" GLASS	– 200W INC / LED25W



BA 6" OPAL BALL
(100W INC MAX/LED12W)



BAX 9" CLEAR GLOBE
BAF 9" FROSTED GLOBE
(200W INC MAX/LED25W)



FN 8" CLEAR TEXTURED GLOBE
(150W INC MAX/LED25W)



BA7 7" CLEAR GLOBE



PR8 8" PRISMATIC




OC 8" OPAL TAPERED GLOBE
(60W INC MAX/LED25W)

BA7F 7" FROSTED GLOBE
(100W INC MAX/LED25W)

PR8F 8" PRISMATIC FROSTED
(200W INC MAX/LED45W)

J – ACCESSORIES




GR10 10" WIRE GRILL

GR14 14" WIRE GRILL

GR16 16" WIRE GRILL

GR18 18" WIRE GRILL

GR20 20" WIRE GRILL




LGR10 10" LOUVERED GRILL

LGR14 14" LOUVERED GRILL

LGR16 16" LOUVERED GRILL

LGR18 18" LOUVERED GRILL

LGR20 120" LOUVERED GRILL




FGR10 10" FLAT GRILL

FGR14 14" FLAT GRILL

FGR16 16" FLAT GRILL

FGR18 18" FLAT GRILL

FGR20 20" FLAT GRILL




CRL10 10" CURVED POLYCARB LENSE

CRL14 14" CURVED POLYCARB LENSE

CRL16 16" CURVED POLYCARB LENSE

CRL18 18" CURVED POLYCARB LENSE

CRL20 20" CURVED POLYCARB LENSE




FLE10 10" FLAT CLEAR LENSE

FLE14 14" FLAT CLEAR LENSE

FLE16 16" FLAT CLEAR LENSE

FLE18 18" FLAT CLEAR LENSE


FLE20 20" FLAT CLEAR LENSE




REF 9.5" DIAMETER REFRACTOR



UGR U- WIRE GUARD




WG-1 WIRE GUARD




WG-2 WIRE GUARD

Available for shades
12" or higher



GU-1 CAST ALUMINUM GUARD



GU-2 CAST GUARD

Available for shades
12" or higher