

MODEL#

NOTES:

BASELITE - GENEVA - LED - SPECIFICATION SHEET



	PF	ROJECT N	IAME:			PR	OJECT TY	PE: _								
		/	/	/	/	/	/	/	Х	/	Х	/	Х	/	Х	
	Α	В	С	D	Е	F	G		Н		ı	J	J	K		
PLE:	LGB1	41	BLC	CNK	41	4W	22K									



A - SHADES

GENEVA COLLECTION

- LGB1 4WLED (MAX)
- LGB2 4WLED (MAX)
- LGB3 4WLED (MAX)
- LGB4 4WLED (MAX)
- LGB5 4WLED (MAX)
- LGB6 4WLED (MAX)
- LGB7 4WLED (MAX)
- LGB8 4WLED (MAX)
- LGB9 4WLED (MAX)

B-FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS) (*SEE NOTES FOR LIMITATIONS*) 14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB, 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C-MOUNTING

WALL MOUNT

WM19, WM20, WM21, W23, WM24, WM25, WM26, WM29, WM29V

CORD MOUNT (INC)

BLC, WHC, TCB, TCW, FHB, FHW

COLOR CORD CODES (SEE WEBSITE FOR SWATCH COLORS) BKCC, WCC, RCC, BCC, OCC, PCC, BHCC, BLCC, PCCC, TSCC, NTCC, MCC, NCC, SCC, TCC, NYCC, BZCC

STEM MOUNT

ST6, ST12, ST18, ST24, ST36, ST48, STXX

D – MOUNTING ADD-ONS

UNIVERSAL ADD-ONS

CNK

E - ACC. FINISH OPTION

SEE SECTION "B" FOR COLOR OPTION.

F - LIGHT SOURCE

LIGHT EMITTED DIODE (LED) 4W

G - LED COLOR TEMP


(ONLY APPLICABLE FOR LED LIGHT SOURCE. SKIP THIS SECTION IF OPTION DOES NOT APPLY.) 22K - 2200 K*


NOTES

- *FINISH OPTIONS 20, 21, 22, 23 ARE FOR SOLID BRASS FIXTURES ONLY
- *FINISH OPTIONS 19, 21, 22, 23 ARE AN ACID FINISH AND IS APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
- *FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- *FIXTURE DIMENSIONS MAY VARY ± 0.25










C - MOUNTING OPTIONS (CONTINUED)

WALL MOUNT

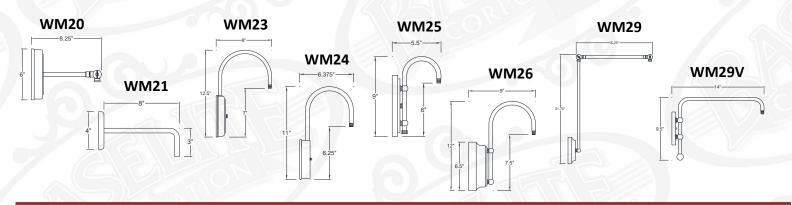

COLOR CORD CODES


MCC MINT CLOTH CORD

*COLOR CORDS NOT APPLICABLE FOR LED. MEDIUM BASE LED BULBS ARE APPLICABLE.









PCC PURPLE CLOTH CORD

- * CANOPY INCLUDED WITH ANY CHOICE OF COLOR CORD. * DESIGNED FOR INDOOR USE OR DRY LOCATIONS
- * 100W MAX/300V RATED



GENEVA COLLECTION

PROJECT NAME:	
PROJECT TYPE:	

C - MOUNTING OPTIONS (CONTINUED)

CORD MOUNTS

FOR LED OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



BLC 8' BLACK CORD (INCLUDES CANOPY) INC
WHC 8' WHITE CORD (INCLUDES CANOPY) INC



FHB 8' BLACK CORD WITH FLAT HUB
8' WHITE CORD WITH FLAT HUB



TCB 8' BLACK CORD, CABLE, and LOOP
TCW 8' WHITE CORD, CABLE, and LOOP

STEM MOUNT



ST(XX) STEM- 1/4" NPT

XX = LENGTH OF STEM (EXAMPLE – "ST18" = STEM MOUNT 18" LENGTH) *CANOPY NOT INCLUDED, ADD IN SECTION D

D - UNIVERSAL ADD-ON



CNK Canopy For Multiple Fixtures

*CNK dimensions vary on number of fixtures are applied

F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

OPTION	WATTAGE	LUMEN	CRI	VOLTAGE	DIMMING		
MEDIUM BASE E26	(LED BULB)						
LED4W	4W	200 @2200K	>95	120-277 VAC	N/A		
*IMPORTANT – FOR LIGHT EMITTE ARE LIMITED DUE TO SIZE OF THE F PLEASE SEE AVAILABILITY CHART TO EXAMPLE	IXTURE AND THE CORD WATTA		LED 4W (MAX)- LGB1, LGB2, LGB3, LGB4, LGB5, LGB6, LGB7, LGB8, LBG9				