



BASELITE – MODERN CONE SHADE – INC – SPEC SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	/	/
	A	B	C	D	E	F	G	H	I	J	K
EXAMPLE:	MCS16	89G	BLC	X	X	150INC	X	X	X	X	X

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



A - SHADES

MODERN CONE SHADE

- MCS6 - 100WINC (MAX)
- MCS16 - 150WINC (MAX)
- MCS21 - 150WINC (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)
(*SEE NOTES FOR LIMITATIONS*)

- 14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB, 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C – MOUNTING OPTIONS

½" ARM EXTENSIONS

- E1, E2, E3, E4, B1, E16, E17, E27

¾" ARM EXTENSIONS

- E3A, E4A, E5, E6, E7, E8, E9, E10, E11, E12, E13, B15, B15S, E19, E20, E21, E25

E14 - CREATE YOUR OWN

(BASELITE WILL TAKE YOUR SKETCH AND FABRICATE A CUSTOM ARM EXTENSION TO MEET YOUR NEEDS).

¼" WALL MOUNT

- WM19, WM20, WM21, WM23, WM24, WM25, WM26, WM27, WM28, WM29, WM29V

CORD MOUNT

- BLC, WHC, TCB, TCW, TCHB, TCHW, TLB, TLW, TLB, TLW, RCB, RCW, RCHB, RCHW, FHB, FHW, CBLC, CWHC

STEM MOUNT

- ST6, ST12, ST18, ST24, ST36, ST48, STXX

D – MOUNTING ADD-ONS

INC ADD-ONS

- CB1/2", CB3/4", CBC1/2", CBC3/4", SLC1/2", SLC3/4" STC1/2"

UNIVERSAL ADD-ONS

- SQ ½", SQ ¾", FH ½", FH ¾", TRB ½", TRB ¾", SWL, LGSWL, CNK, INB, RINB

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)

- INCANDESCENT (INC)**
100W, 150W

G – LED COLOR TEMP

NOT AVAILABLE

H – ELECTRICAL OPTION

NOT AVAILABLE

I – GLASS OPTIONS

NOT AVAILABLE

J – ACCESSORIES

NOT AVAILABLE

K – ACCESSORY COLOR


SEE SECTION "B" FOR COLOR OPTIONS.

NOTES

- (1). FINISH OPTIONS 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
- (2). FINISH OPTIONS 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- (3). FINISH OPTIONS FOR SHADES ≤ 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES > 10" IN DIAMETER ARE WHITE ON THE INSIDE.
- (4). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.



MCS6 H- 5.5" W- 6.5"



MCS16 H- 9.75" W- 15.75"




MCS21 H- 7.5" W- 21.5"




C - MOUNTING OPTIONS

1/2" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED *E27 CUSTOM BACK PLATE - 8" (H) .5" (W)




E1 8.5"(H) 18.5"(W)




E2 18.5"(H) 35"(W)




E3 16"(H) 24.75"(W)




E4 14.5"(H) 22.25"(W)




B1 4"(H) 12"(W)



E16 4.75"(H) 8.5"(W)




E17 4.75"(H) 9.5"(W)




E27 10.25"(H) 10.5"(W)

3/4" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

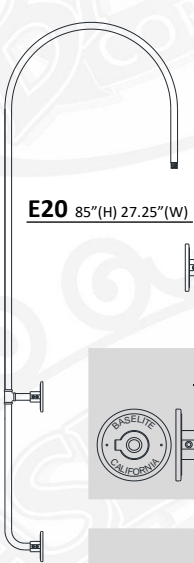


E20 85"(H) 27.25"(W)




E3A 16.375"(H) 26.25"(W)




E4A 14.5"(H) 23.75"(W)



E5 15"(H) 38.5"(W)



E6 9"(H) 23.75"(W)




E9 41.75"(H) 28.125"(W)

NOTES:



* All arms sold with Cast Backplate (CB)
* Backplate may vary in size depending on light source.


E14




* Baselite will take your sketch and fabricate a custom arm extension to meet your needs
* Dimensions to be determined by customer




E12 6(H) 39"(W)




E7 9"(H) 49.75"(W)




E10 18"(H) 55.75"(W)




E8 12"(H) 31.25"(W)




B15 7.5"(H) 24.5"(W)




E11 19"(H) 36.5"(W)



E25 32.625"(H) 28.5"(W)

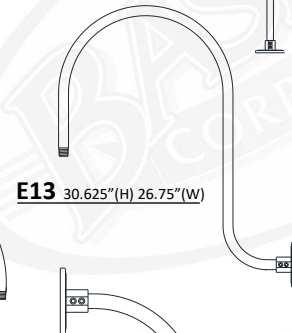


E13 30.625"(H) 26.75"(W)



B15S 7.5"(H) 19.5"(W)



E21 12.5"(H) 28.5"(W)




E19 10.625"(H) 11.5"(W)

1/4" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION *FOR SHADES 10" OR SMALLER IN DIAMETER * MAXIMUM SECTIONS OF MOUNTS ARE DIMENTIONED




WM19 6"(H) 8.25"(W)




WM20 6"(H) 8.25"(W)




WM21 4.75"(H) 8"(W)



WM23 12.5"(H) 8"(W)



WM24 11"(H) 6.375"(W)



WM25 9"(H) 5.5"(W)




1/4" WALL MOUNTS (CONTINUED)

*MOUNTS RATED FOR WET LOCATION *FOR SHADES 10" OR SMALLER IN DIAMETER * MAXIMUM SECTIONS OF MOUNTS ARE DIMENTIONED



WM26 12"(H) 9"(W)




WM27 10"(H) 8"(W)



WM28 13"(H) 10"(W)




WM29 9.5"(H) 14"(W)



WM29V 21.75"(H) 15.25"(W)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

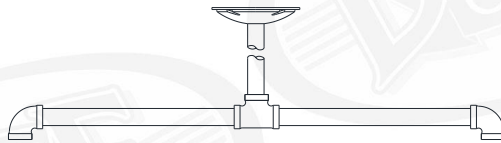

DP24 DOUBLE PENDANT 20"(H) 24"(W)

*DP24 COMES STANDARD WITH LSTC AND ST18




ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM
(EXAMPLE -- "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D
* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST

INCANDESCENT CORD MOUNTS



BLC 8' BLACK CORD
WHC 8' WHITE CORD



TCB 8' BLACK CORD, CABLE, and LOOP
TCW 8' WHITE CORD, CABLE, and LOOP



TCHB 8' BLACK CORD, 3' CHAIN, and LOOP
TCHW 8' WHITE CORD, 3' CHAIN, and LOOP



TLB 8' BLACK TELEPHONE CORD AND CABLE
TLW 8' WHITE TELEPHONE CORD AND CABLE
* Not available H.I.D.



RCB 8' BLACK CORD, CABLE, and LOOP
RCW 8' WHITE CORD, CABLE, and LOOP



RCHB 8' BLACK CORD, 3' CHAIN, and LOOP
RCHW 8' WHITE CORD, 3' CHAIN, and LOOP



FHB 8' BLACK CORD WITH FLAT HUB
FHW 8' WHITE CORD WITH FLAT HUB




CBLC 8' BLACK CORD and CABLE
CWLC 8' WHITE CORD and CABLE




D - MOUNTING ADD-ONS


INCANDESCENT ARM ADD-ONS



CB 1/2" CAST ALUMINUM BACKPLATE 1/2 NPT
CB 3/4" CAST ALUMINUM BACKPLATE 3/4 NPT



CBC 1/2" 1/2" BACKPLATE COVER
CBC 3/4" 3/4" BACKPLATE COVER
* Includes slip ring to hold 1/2" or 3/4" arm extension in place





SLC 1/2" SLOPE CEILING CANOPY 1/2"
SLC 3/4" SLOPE CEILING CANOPY 3/4"
*(Slopes To 20 Degrees)




STC 1/2" 1/2" STEM MOUNT CANOPY

UNIVERSAL STEM AND ARM ADD-ONS


* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:



CNK CANOPY For MULTIPLE FIXTURES
*CNK dimensions vary on number of fixtures applied



LGSWL 1/2" NPT SWIVEL
For all shades greater than 7" wide in diameter



FH 1/2" FLAT HUB 1/2"
FH 3/4" FLAT HUB 3/4"



TRB 1/2"-4' Cable SUPPORT
TRB 3/4"-4' Cable SUPPORT

F - LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

INCANDESCENT (INC) MED E26

INC 100W- MCS6
INC 150W- MCS16, MCS25

*IMPORTANT - FOR INCANDESCENT (INC) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT.

EXAMPLE: / INC150W /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
100WINC	100W	PER BULB SPECS	>90	120-277 VAC	N/A
150WINC	150W	PER BULB SPECS	>90	120-277 VAC	N/A