



BASELITE – WOOD HANDLE – INC – SPEC SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

| | | | | | | | | | | | |
|----------|------|----|-----|----|----|-----|-----|---|---|----|--------|
| MODEL # | / | / | / | x | / | / | / | / | / | / | / |
| | A | B | C | D | E | F | G | H | I | J | K |
| EXAMPLE: | W513 | 41 | BLC | BB | 43 | 12W | 27K | - | - | 44 | LDM120 |

NOTES:



A - SHADES

- WOOD HANDLE**
TRD.WH3 - 150WINC(MAX)
TR.WH3 - 150WINC(MAX)
TR2.WH3 - 150WINC(MAX)
D514.WH5 - 150WINC(MAX)
CNW16.WH4 - 150WINC(MAX)
W510.WH6 - 100WINC(MAX)
W513.WH3 - 100WINC(MAX)
CGBW10.WH2 - 100WINC(MAX)
SCPW10.WH2 - 100WINC(MAX)
S5.CA57.WH1 - 60WINC(MAX)
S3.GS08.WH1 - 60WINC(MAX)
S3.WG6.WH1 - 60WINC(MAX)

B - FINISH OPTIONS

- (SEE WEBSITE FOR SWATCH COLORS)
 (*SEE NOTES FOR LIMITATIONS*)
 14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB,
 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40,
 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51,
 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64,
 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79,
 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91,
 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C – MOUNTING OPTIONS

- INC CORD MOUNT**
 BLC, WHC

D – MOUNTING ADD-ONS

- BB – BRASSH BUSHING

E – MOUNTING COLOR

SEE SECTION “B” FOR COLOR OPTIONS.

F – LIGHT SOURCE

- INCANDESCENT (INC)**
 60W, 100W, 150W

G – LED COLOR

NOT AVAILABLE

H – GLASS OPTION

CERTAIN FIXTURES AVAILABLE UPON REQUEST, CALL FACTORY FOR DETAILS.

I - ACCESSORIES

CERTAIN FIXTURES AVAILABLE UPON REQUEST, CALL FACTORY FOR DETAILS.

J – ACCESSORY COLOR

SEE SECTION “B” FOR COLOR OPTIONS.

K – ELECTRICAL OPTION

NOT AVAILABLE

NOTES

- (1). FINISH OPTIONS 20, 21, 22, 23 ARE FOR SOLID BRASS FIXTURES ONLY.
- (2). FINISH OPTIONS 19, 21, 22, 23, 75,76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
- (3). FINISH OPTIONS 19, 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE.
- (4). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- (5). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
 *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).
 *ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.
 *FIXTURE DIMENSIONS MAY VARY ± 0.25.
 *CORD AND CANOPY COME IN THE SAME COLOR.




A – SHADES

WOOD HANDLE SHADE SERIES


*FIXTURE COMES AS SHOWN WITH WOOD HANDLE

* CUSTOM FIXTURES AVAILABLE UPON REQUEST, CALL FACTORY FOR DETAILS.




TRD.WH3 H-13" W-9"
TR .WH3 H-13" W-9"


*TRD- ALUMINUM SHADE
*TR- GLASS SHADE




TR2.WH3 H-15.5" W-12"




W513.WH3 H-11" W-13"




CGBW10.WH2 H-13.5" W-9.5"




SCPW10.WH2 H-10.5" W-10"




CNW16.WH4 H-20" W-16"

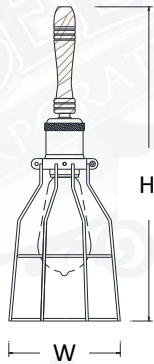


S5.CA57.WH1 H-14.75" W-5.25"




S3.GS08.WH1 H-14" W-8"



S3.WG6.WH1 H-14" W-5"



D514.WH5 H-12" W-14"



W510.WH6 H-9.5" W-10"



C - MOUNTING OPTIONS

LED CORD MOUNTS

*INCANDESCENT MAX WATTAGE 150 WATT. CALL FACTORY FOR HIGHER WATTAGES. LOOPS, CABLES, AND CHAINS AVAILABLE ONLY FOR INCANDESCENT
*CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: .625" (H) 5.25" (W) *CORD AND CANOPY COME IN THE SAME COLOR.



- BLC** 8' BLACK CORD (INCLUDES CANOPY) INC
- WHC** 8' WHITE CORD (INCLUDES CANOPY) INC

D - MOUNTING ADD-ONS

CORD ADD-ONS

* CORDS COMES STANDARD WITH A PLASTIC BUSHING IF BRASS BUSHING IS NOT DESIRED



BB BRASS BUSHING

F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

INCANDESCENT (INC) MED E26

INC 60W- S3.GS08.WH1, S3.WG6.WH1, S5.CA57.WH1
INC 100W- W513.WH3, SCPW10.WH2, CGBW10.WH2, W510.WH6
INC 150W- TRD.WH3, TR.WH3, TR2.WH3, CNW16.WH4, D514.WH5

***IMPORTANT – FOR INCANDESCENT (INC) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT.**

EXAMPLE: / INC150W /

| OPTION | WATTAGE | LUMENS | CRI | VOLTAGE | DIMMING |
|---------|---------|----------------|-----|-------------|---------|
| 60INC | 60INC | PER BULB SPECS | >90 | 120-277 VAC | N/A |
| 100WINC | 100W | PER BULB SPECS | >90 | 120-277 VAC | N/A |
| 150WINC | 150W | PER BULB SPECS | >90 | 120-277 VAC | N/A |