



BASELITE – FA-FAP – INC – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	X	/	/
	A	B	C	D	E	F	G	H	I	J	K	
EXAMPLE:	FAP22	41	ST24	SLC1/2"	43	45W	3K	LDM120		GR13	44	

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



A - SHADES

FA SERIES
FA12 - 150WINC (MAX)
FA16 - 300WINC (MAX)
FA22 - 300WINC (MAX)
FAP SERIES
FAP12 - 150WINC (MAX)
FAP16 - 300WINC (MAX)
FAP22 - 300WINC (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)
 (*SEE NOTES FOR LIMITATIONS*)
 21P, 41, 41.5, 43, 44, 48, 51, 52, 53, 58, 59,
 61, 62, 74, 79, 97, 99, 100, MG.

C – MOUNTING OPTIONS

CORD MOUNT
BLC – 8’ black cord & canopy
WHC – 8’ white cord & canopy
TCB – 8’ black cord, loop, cable & canopy
TCW – 8’ white cord, loop, cable & canopy
TLB – 8’ black telephone cable
TLW – 8’ white telephone cable
CBLC – 8’ black cord, cable and canopy
CWHC – 8’ white cord, cable and canopy
3CBLC – 3 cable and 8’ black cord & canopy
3CBLW – 3 cable and 8’ white cord & canopy
HKBC – hook and 8’ black cord & canopy
HKWC – hook and 8’ white cord & canopy
STEM MOUNT
ST18 – 18” stem
ST24 – 24” stem
ST36 – 36” stem
ST48 – 48” stem
STXX – XX = stem length

D – MOUNTING ADD-ONS

INC ADD-ONS
SLC1/2" – slope ceiling canopy ½"
SLC3/4" – slope ceiling canopy ¾"
STC1/2" – stem mount canopy ½"
HB3 – ¾" hub

E – MOUNTING COLOR

SEE SECTION “B” FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 3 FOR WATTAGE LIMITATIONS)
INCANDESCENT (INC)
150W, 300W

G – LED COLOR TEMP

NOT AVAILABLE

H – ELECTRICAL OPTION

NOT AVAILABLE

I – GLASS OPTIONS

NOT AVAILABLE

J – ACCESSORIES


LGR12 - 12” louvered grill
LGR16 - 16” louvered grill
LGR22 - 22” louvered grill
ARFL12 - 12” flat clear diffuser
ARFL16 - 16” flat clear diffuser
ARFL22 - 22” flat clear diffuser
ARFR12 - 12” flat metal ring
ARFR16 - 16” flat metal ring
ARFR22 - 22” flat metal ring
FLE12 - 12” flat clear lens w/ clips
FLE16 - 16” flat clear lens w/ clips
FLE22 - 22” flat clear lens w/ clips
BLE12 - 12” flat clear lens w/ band
BLE16 - 16” flat clear lens w/ band
BLE22 - 22” flat clear lens w/ band
LL12 - 12” clear conical lens
LL16 - 16” clear conical lens
LL22 - 22” clear conical lens
CRL12 - 12” clear curved lens
CRL16 - 16” clear curved lens
CRL22 - 22” clear curved lens
DRL16 - 16” clear drop lens
DRL22 - 22” clear drop lens
BRS16 - 16” aluminum bottom ring
BRS22 - 22” aluminum bottom ring
TRS16 - 16” aluminum top ring
TRS22 - 22” aluminum top ring
FWG16 - 16” full wire grill
FWG22 - 22” full wire grill

K – ACCESSORY COLOR


SEE SECTION “B” FOR COLOR OPTIONS.

NOTES

- (1). FINISH OPTIONS 20, 21, 22, 23 ARE FOR SOLID BRASS FIXTURES ONLY.
 - (2). FINISH OPTIONS 19, 21, 22, 23, 75,76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
 - (3). FINISH OPTIONS 19, 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
 - (4). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE.
 (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.)
 *ALL FIXTURES MOUNT TO A 4-0 JUNCTION BOX.
 *FIXTURE DIMENSIONS MAY VARY ± 0.25.

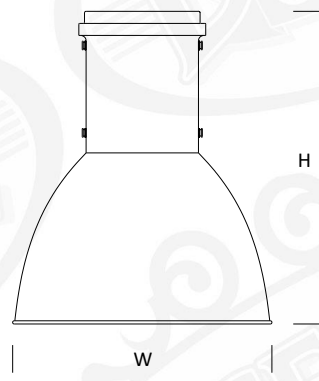

	HEIGHT	WIDTH
FAP12	H-13.5"	W-12"
FAP16	H-20.25	W-16"
FAP22	H-23.5"	W-22"

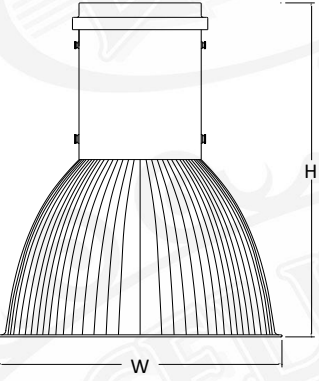


	HEIGHT	WIDTH
FA12	H-13.5"	W-12"
FA16	H-17.5"	W-16"
FA22	H-22"	W-22"




C – MOUNTING OPTIONS

CORD MOUNTS


BASELITE USES A DURABLE SJT CORD FOR ALL CORD MOUNT OPTIONS. ALL CORD MOUNTS COME WITH AN 6" ROUND CANOPY.




CBLC 8' BLACK CORD, CABLE & CANOPY
CWHC 8' WHITE CORD, CABLE & CANOPY




TLB 2.5' BLACK TELEPHONE CABLE
TLW 2.5' WHITE TELEPHONE CABLE



TCB 8' CABLE, BLACK CORD, CANOPY & LOOP
TCW 8' CABLE, WHITE CORD, CANOPY & LOOP



BLC 8' BLACK CORD AND CANOPY
WHC 8' WHITE CORD AND CANOPY



3CBLC 3 CABLE AND BLACK CORD & CANOPY
3CWHC 3 CABLE AND WHITE CORD & CANOPY



HKBC 3/4" HOOK WITH 8' BLACK CORD
HKWC 3/4" HOOK WITH 8' WHITE CORD

STEM MOUNTS




ST(XX) STEM- 3/4" NPT

XX = LENGTH OF STEM
(EXAMPLE – "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D


D - MOUNTING ADD-ONS

INCANDESCENT MOUNTING ADD-ONS

* FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



SLC 1/2" SLOPE CEILING CANOPY 1/2"
SLC 3/4" SLOPE CEILING CANOPY 3/4"
*(Slopes To 20 Degrees)



STC 1/2" 1/2" STEM MOUNT CANOPY



HB3 - 3/8" HUB




F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.


INCANDESCENT (INC) <small>MED E26</small>					
INC 150W (MAX)- FA12, FAP12 INC 300W (MAX)- FA16, FA22, FAP16, FAP22			*IMPORTANT – FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT. EXAMPLE: / 300WINC /		
OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
150WINC	150W	PER BULB SPECS	>90	120-277 VAC	N/A
300WINC	300W	PER BULB SPECS	>90	120-277 VAC	N/A

J – ACCESSORIES


*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.




CRL12 - 12" CLEAR CURVED LENS
CRL16 - 16" CLEAR CURVED LENS
CRL22 - 22" CLEAR CURVED LENS



ARFL12 - 12" FLAT CLEAR LENS WITH CLIPS
ARFL16 - 16" FLAT CLEAR LENS WITH CLIPS
ARFL22 - 22" FLAT CLEAR LENS WITH CLIPS




ARFR12 - 12" FLAT METAL RING
ARFR16 - 16" FLAT METAL RING
ARFR22 - 22" FLAT METAL RING




FLE12 - 12" FLAT CLEAR LENS WITH CLIPS
FLE16 - 16" FLAT CLEAR LENS WITH CLIPS
FLE22 - 22" FLAT CLEAR LENS WITH CLIPS



BLE12 - 12" FLAT CLEAR LENS WITH BAND
BLE16 - 16" FLAT CLEAR LENS WITH BAND
BLE22 - 22" FLAT CLEAR LENS WITH BAND



LL12 - 12" CLEAR CONICAL LENS
LL16 - 16" CLEAR CONICAL LENS
LL22 - 22" CLEAR CONICAL LENS



LGR12 - 12" LOUVERED GRILL
LGR16 - 16" LOUVERED GRILL
LGR22 - 22" LOUVERED GRILL



FWG16 - 16" FULL WIRE GRILL
FWG22 - 22" FULL WIRE GRILL



DRL16 - 16" PRISMATIC DROP LENS
DRL22 - 22" PRISMATIC DROP LENS



TRS16 - 16" TOP RING ALUMINUM SHIELD
TRS22 - 22" TOP RING ALUMINUM SHIELD



BRS16 - 16" BOTTOM RING ALUMINUM SHIELD
BRS22 - 22" BOTTOM RING ALUMINUM SHIELD