



BASELITE – YARD LITE – INC – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	X	/	X	/	/	/
EXAMPLE:	A	B	C	D	E	F	G	H	I	J	K		
	YP14	41	E16	SQ ½"	43	45W	3K	LDM120	PR3	GR14	44		

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



YP16/50-49/ST18/49/STC/150INC

A - SHADES

- YARD LITES**
YL12 - 100WINC (MAX)
YL14 - 100WINC (MAX)
YL16 - 150WINC (MAX)
YP12 - 100WINC (MAX)
YP14 - 100WINC (MAX)
YP16 - 150WINC (MAX)
CYP12 - 100WINC (MAX)
CYP14 - 100WINC (MAX)
CYP16 - 150WINC (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)
 (*SEE NOTES FOR LIMITATIONS*)
 14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB, 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C - MOUNTING OPTIONS

- ½" ARM EXTENSIONS**
 E1, E2, E3, E4, B1, E16, E17, E27
¾" ARM EXTENSIONS
 E3A, E4A, E5, E6, E7, E8, E9, E10, E11, E12, E13, B15, B15S, E19, E20, E21, *E22, E25
E14 - CREATE YOUR OWN
 (BASELITE WILL TAKE YOUR SKETCH AND FABRICATE A CUSTOM ARM EXTENSION TO MEET YOUR NEEDS).
½" WALL MOUNT
 B13, WM13, WM13R, WM13X, B10, B11, B101
¾" WALL MOUNT
 B9, B9C, B12, WM14, WM14X, WM15, WM18, WM35, WM35X, WM55, WM55X, WM60, WM60X, WM61, WM61X, WM70, WM70X, WM71, WM71X
CORD MOUNT (INC)
 BLC, WHC, TCB, TCW, TCHB, TCHW, TLB, TLW, TLW, RCB, RCW, RCHB, RCHW, FHB, FHW, CBLC, CWHC, CHB, CHW
STEM MOUNT
 ST6, ST12, ST18, ST24, ST36, ST48, STXX

D – MOUNTING ADD-ONS

- INC ADD-ONS**
 CB1/2", CB3/4", CBC1/2", CBC3/4", SLC1/2", SLC3/4" STC1/2"
UNIVERSAL ADD-ONS
 SQ ½", SQ ¾", FH ½", FH ¾", TRB ½", TRB ¾", SWL, LGSWL, CNK, INB, RINB

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)
INCANDESCENT (INC)
 100W, 150W

G – LED COLOR TEMP

NOT AVAILABLE

H – ELECTRICAL OPTION

NOT AVAILABLE

I – GLASS OPTIONS

- CL3, CL4, CLT3, CLT4, BL3, BL4, RE3, RE4, GR3, GR4, AH3, AH4, FR3, FR4, FRT3, FRT4, PR3, PR4, BA, BAX, BAF, PR8, PR8F, FN, OC

J – ACCESSORIES


- GR14, GR16, REF, UGR, LGR14, LGR16, CRL14, CRL16, FLE14, FLE16, FGR14, FGR16, GU-1, GU-2, WG-1, WG-2

K – ACCESSORY COLOR


SEE SECTION "B" FOR COLOR OPTIONS.

NOTES


- (1). FINISH OPTIONS 20, 21, 22, 23 ARE FOR SOLID BRASS FIXTURES ONLY.
 - (2). FINISH OPTIONS 19, 21, 22, 23, 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
 - (3). FINISH OPTIONS 19, 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
 - (4). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
 - (5). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
- *ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
 *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE.
 (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.)
 *ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.
 *FIXTURE DIMENSIONS MAY VARY ±0.25.
 *CORD AND CANOPY COME IN THE SAME COLOR.
 *E22 ¾" ARM EXTENSION FOR YL14 AND YL16 ONLY

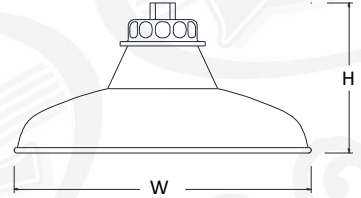

- YP12** H-6.5" W-12"
YP14 H-7.5" W-14"
YP16 H-8.5" W-16"

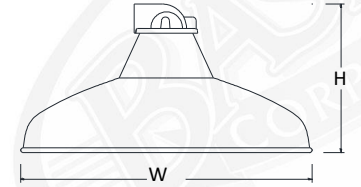

- YL12** H-6" W-12"
YL14 H-7" W-14"
YL16 H-8" W-16"

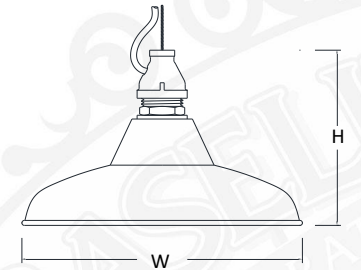

- CYP12** H-7.75" W-12"
CYP14 H-8.75" W-14"
CYP16 H-9.75" W-16"



C - MOUNTING OPTIONS

1/2" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED *E27 CUSTOM BACK PLATE - 8" (H) .5" (W)




E1 8.5"(H) 18.5"(W)



E2 18.5"(H) 35"(W)



E3 16"(H) 24.75"(W)



E4 14.5"(H) 22.25"(W)



B1 4"(H) 12"(W)



E16 4.75"(H) 8.5"(W)




E17 4.75"(H) 9.5"(W)




E27 10.25"(H) 10.5"(W)

3/4" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

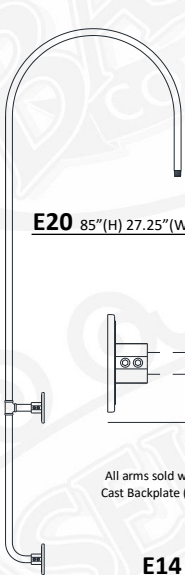


E20 85"(H) 27.25"(W)




E3A 16"(H) 24.75"(W)




E4A 14.5"(H) 22.25"(W)



E5 15"(H) 37"(W)




E6 9"(H) 22.25"(W)



E9 40.25"(H) 27.5"(W)




E12 4.75(H) 37.5"(W)




E7 9"(H) 48.25"(W)




E8 12"(H) 29.75"(W)




Baselite will take your sketch and fabricate a custom arm extension to meet your



B15 7.5"(H) 23"(W)



E11 19"(H) 35"(W)



E25 32"(H) 27"(W)

All arms sold with Cast Backplate (CB)




E14 TBD"(H) TBD"(W)




B15S 7.5"(H) 18"(W)




E21 12"(H) 27"(W)



E22 4.75"(H) 14"(W)
*YL14 & YL16 ONLY

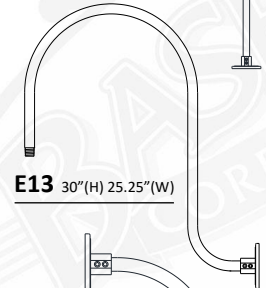

E13 30"(H) 25.25"(W)



E19 10"(H) 10"(W)

1/2" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



B10 4.75"(H) 11"(W)



B101 4.75"(H) 12"(W)




B11 4.75"(H) 13"(W)



B13 4.75"(H) 15"(W)



WM13 12"(H) 9.5"(W)



WM13R 12"(H) 9.5"(W)



WM13X 12"(H) 10.5"(W)

3/4" WALL MOUNTS


*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



B12 4.75"(H) 14"(W)




B9 5"(H) 18"(W)



B9C 5"(H) 18"(W)

*CHAIN HEIGHT TBD BY CUSTOMER



WM14 18"(H) 12"(W)



WM14X 18"(H) 14"(W)




WM15 23"(H) 19.5"(W)



C - MOUNTING OPTIONS (CONTINUED)

3/4" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED

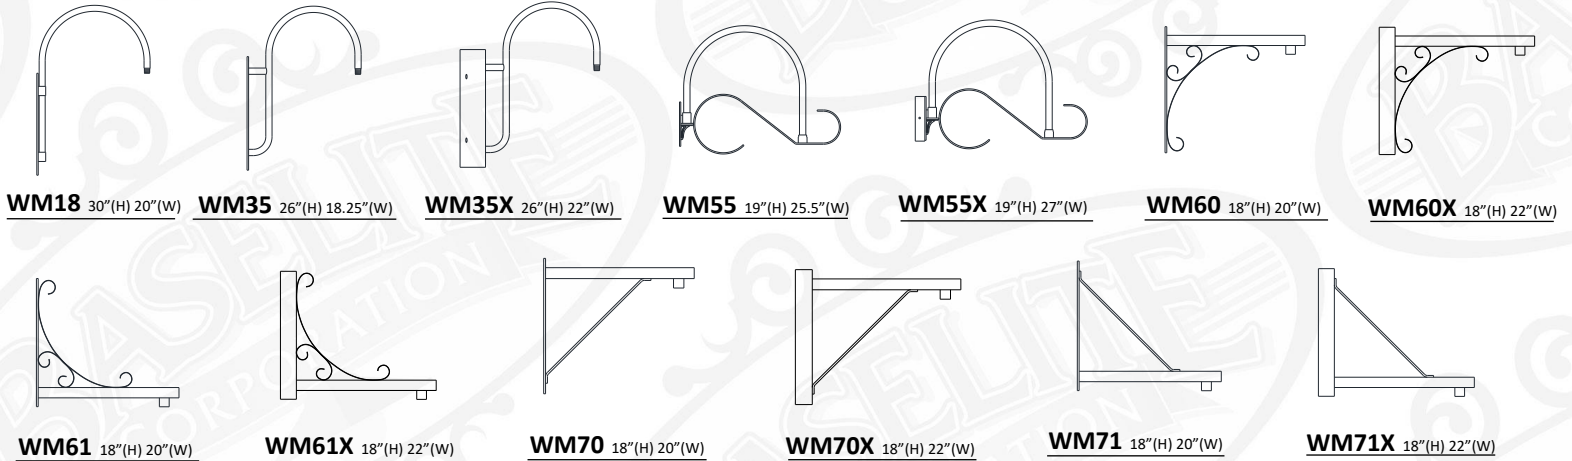


WM18 30"(H) 20"(W) **WM35** 26"(H) 18.25"(W) **WM35X** 26"(H) 22"(W) **WM55** 19"(H) 25.5"(W) **WM55X** 19"(H) 27"(W) **WM60** 18"(H) 20"(W) **WM60X** 18"(H) 22"(W)

WM61 18"(H) 20"(W) **WM61X** 18"(H) 22"(W) **WM70** 18"(H) 20"(W) **WM70X** 18"(H) 22"(W) **WM71** 18"(H) 20"(W) **WM71X** 18"(H) 22"(W)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

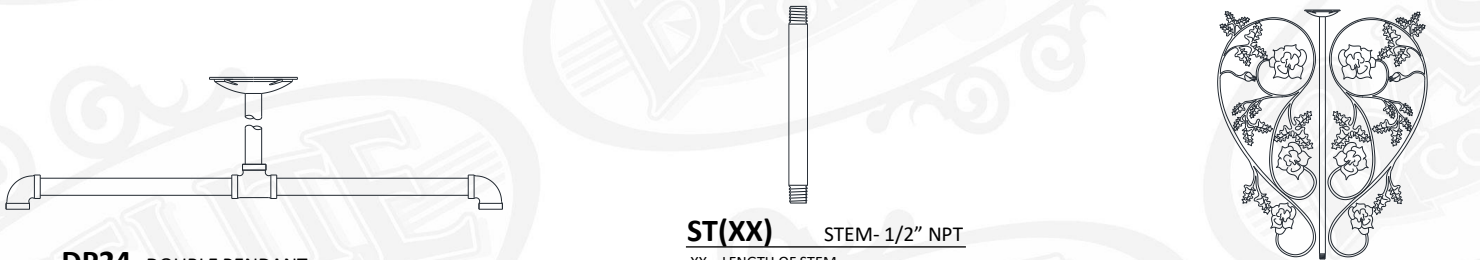

DP24 DOUBLE PENDANT 20"(H) 24"(W)

*DP24 COMES STANDARD WITH STC AND ST18

ST(XX) STEM- 1/2" NPT


XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D
* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST

SC24 SCROLL STEM 33"(H) 24"(W)

*SC24 COMES STANDARD WITH STC

INCANDESCENT CORD MOUNTS

*INCANDESCENT MAX WATTAGE 150 WATT. CALL FACTORY FOR HIGHER WATTAGES. LOOPS, CABLES, AND CHAINS AVAILABLE ONLY FOR INCANDESCENT
*CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: .625" (H) 5.25" (W) *CORD AND CANOPY COME IN THE SAME COLOR.

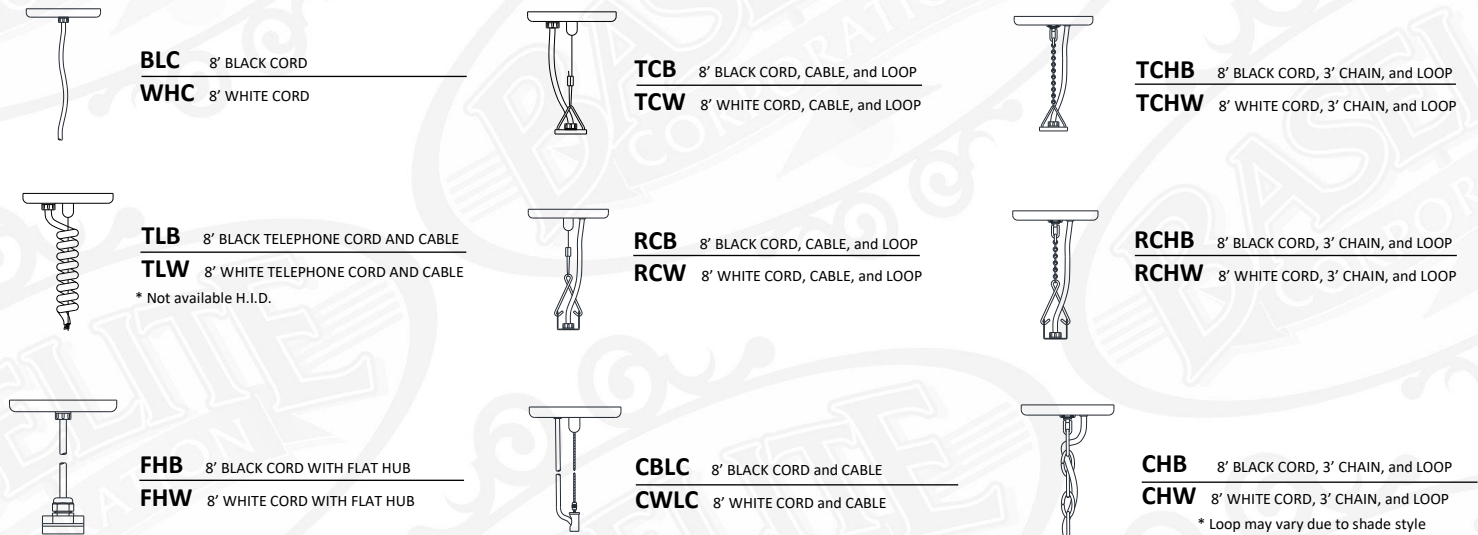

BLC 8' BLACK CORD
WHC 8' WHITE CORD

TCB 8' BLACK CORD, CABLE, and LOOP
TCW 8' WHITE CORD, CABLE, and LOOP

TCHB 8' BLACK CORD, 3' CHAIN, and LOOP
TCHW 8' WHITE CORD, 3' CHAIN, and LOOP

TLB 8' BLACK TELEPHONE CORD AND CABLE
TLW 8' WHITE TELEPHONE CORD AND CABLE

* Not available H.I.D.

RCB 8' BLACK CORD, CABLE, and LOOP
RCW 8' WHITE CORD, CABLE, and LOOP

RCHB 8' BLACK CORD, 3' CHAIN, and LOOP
RCHW 8' WHITE CORD, 3' CHAIN, and LOOP

FHB 8' BLACK CORD WITH FLAT HUB
FHW 8' WHITE CORD WITH FLAT HUB

CBLC 8' BLACK CORD and CABLE
CWLC 8' WHITE CORD and CABLE


CHB 8' BLACK CORD, 3' CHAIN, and LOOP
CHW 8' WHITE CORD, 3' CHAIN, and LOOP
* Loop may vary due to shade style




D - MOUNTING ADD-ONS

INCANDESCENT ARM ADD-ONS

* FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.




CB 1/2" CAST ALUMINUM BACKPLATE 1/2 NPT
CB 3/4" CAST ALUMINUM BACKPLATE 3/4 NPT



CBC 1/2" 1/2" BACKPLATE COVER
CBC 3/4" 3/4" BACKPLATE COVER

* Includes slip ring to hold 1/2" or 3/4" arm extension in place



SLC 1/2" SLOPE CEILING CANOPY 1/2"

SLC 3/4" SLOPE CEILING CANOPY 3/4"
*(Slopes To 20 Degrees)




STC 1/2" 1/2" STEM MOUNT CANOPY

UNIVERSAL STEM AND ARM ADD-ONS


* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:

MODEL #: -/-/-(L)WTM, TRB 3/4", LGSWL-/-/-----/
A B C D E F G H I J K




CNK CANOPY For MULTIPLE FIXTURES

*CNK dimensions vary on number of fixtures applied




LGSWL 1/2" NPT SWIVEL
For all shades greater than 7" wide in diameter



FH 1/2" FLAT HUB 1/2"

FH 3/4" FLAT HUB 3/4"



TRB 1/2"-4' Cable SUPPORT

TRB 3/4"-4' Cable SUPPORT

F - LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

INCANDESCENT (INC) MED E26

INC 100W (MAX)- YL12, YL14, YP12, YP14, CYP12, CYP14

INC 150W (MAX)- YL16, YP16, CYP16

*IMPORTANT - FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT.

EXAMPLE: / INC150W /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
100WINC	100W	PER BULB SPECS	>90	120-277 VAC	N/A
150WINC	150W	PER BULB SPECS	>90	120-277 VAC	N/A



I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.



CL3 3" CLEAR GLASS



PR3 3" PRISMATIC GLASS



RE3 3" RED GLASS



BL3 3" BLUE GLASS

CL4 4" CLEAR GLASS

PR4 4" PRISMATIC GLASS

RE4 4" RED GLASS

BL4 4" BLUE GLASS

CLT3 3" CLEAR TEMPERED

CLT4 4" CLEAR TEMPERED



FR3 3" FROSTED GLASS



AH3 3" AMBER HYDE GLASS



GR3 3" GREEN GLASS

FR4 4" FROSTED GLASS


AH4 4" AMBER HYDE GLASS

GR4 4" GREEN GLASS

FRT3 3" FROSTED TEMPERED

FRT4 4" FROSTED TEMPERED

GLASS – DIMENSIONS	
3" GLASS	
Diameter	3.34"
Height	6.93"
Fitter	3.29"
4" GLASS	
Diameter	4.34"
Height	8.37"
Fitter	4.29"



GLASS – MAX WATTAGE	
3" GLASS	100W INC / LED12W
4" GLASS	200W INC / LED25W



BA 6" OPAL BALL
(100W INC MAX/LED12W)



BAX 9" CLEAR GLOBE



FN 8" CLEAR TEXTURED GLOBE
(150W INC MAX/LED25W)

BAF 9" FROSTED GLOBE
(200W INC MAX/LED25W)



BA7 7" CLEAR GLOBE



PR8 8" PRISMATIC




OC 8" OPAL TAPERED GLOBE
(60W INC MAX/LED25W)

BA7F 7" FROSTED GLOBE
(100W INC MAX/LED25W)


PR8F 8" PRISMATIC FROSTED
(200W INC MAX/LED45W)

J – ACCESSORIES




GR14 14" WIRE GRILL

GR16 16" WIRE GRILL




LGR14 14" LOUVERED GRILL

LGR16 16" LOUVERED GRILL




FGR14 14" FLAT GRILL

FGR16 16" FLAT GRILL




CRL14 14" CURVED POLYCARB LENS

CRL16 16" CURVED POLYCARB LENS



FLE14 14" FLAT CLEAR LENS


FLE16 16" FLAT CLEAR LENS




REF 9.5" DIAMETER REFRACTOR




UGR U-WIRE GUARD




WG-1 WIRE GUARD



WG-2 WIRE GUARD



GU-1 CAST ALUMINUM GUARD



GU-2 CAST GUARD