



# BASELITE - CYLINDER – LED – SPECIFICATION SHEET



PROJECT NAME: \_\_\_\_\_ PROJECT TYPE: \_\_\_\_\_

MODEL #	/	/	/	/	/	/	/	/	/	X	X	X
EXAMPLE:	A CY510	B 41	C ST18	D STC	E 43	F 100INC	G -	H -	I -	J -	K -	

\*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:

---



---



---



CY510/93/ST18/58/100INC

## A - SHADES

### CYLINDERS

- CY48 - 12WLED (MAX)
- CY510 - 12WLED (MAX)
- CYB510 - 12WLED (MAX)
- CY618 - 80WLED (MAX)
- CY620 - 80WLED (MAX)
- CY816 - 12WLED (MAX)
- CYB816 - 12WLED (MAX)
- CYBU510 - 2-25WLED (MAX)
- CYBU816 - 2-25WLED (MAX)
- CG512 - 25WLED (MAX)
- PD2012 - 25WLED (MAX)
- SD2012 - 25WLED (MAX)

## B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)  
(\*SEE NOTES FOR LIMITATIONS\*)

14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB, 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

## C - MOUNTING OPTIONS

- LED CORD MOUNT**  
LBLC, LWHC, LTCB, LTCW, LTCHB, LTCHW, LTLB, LTLW, LTLB, LTLW, LRCB, LRCW, LRCHB, LRCHW, LFHB, LFHW, LHBLC, LHWHC, LCBLC, LCWHC, LCHB, LCHW
- STEM MOUNT**  
ST6, ST12, ST18, ST24, ST36, ST48, STXX

## D - MOUNTING ADD-ONS

- LED ADD-ONS**  
LSLC, LSTC
- UNIVERSAL ADD-ONS**  
FH 1/2", FH 3/4", SWL, LGSWL, CNK

## E - MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

## F - LIGHT SOURCE

- (SEE PAGE 3 FOR WATTAGE LIMITATIONS)
- LIGHT EMITTED DIODE (LED)**  
LED10WF, LED12W, LED25W, LED35W, LED50W, LED80W

\*NOTE – MAX WATTAGE IS LISTED NEXT TO THE SHADE MODEL NUMBER IN SECTION "A". ALL WATTAGES BELOW THAT ARE ALSO AVAILABLE FOR THE SAME MODEL NUMBER.

## G – LED COLOR TEMP

- 27K – 2700 KELVIN
- 3K – 3000 KELVIN
- 35K – 3500 KELVIN
- 4K – 4000 KELVIN
- 5K – 5000 KELVIN

## H – ELECTRICAL OPTION

(SEE PAGE 3 FOR DIMMING OPTION SPECIFICATIONS)

**LDM120**  
**LDM0-10**

## I – GLASS OPTIONS

NOT AVAILABLE

## J – ACCESSORIES


NOT AVAILABLE

## K – ACCESSORY COLOR


NOT AVAILABLE

## NOTES


- FINISH OPTIONS 20, 21, 22, 23 ARE FOR SOLID BRASS FIXTURES ONLY.
- FINISH OPTIONS 19, 21, 22, 23, 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
- FINISH OPTIONS 19, 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.  
\*ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).  
\*ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).  
\*ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.  
\*FIXTURE DIMENSIONS MAY VARY ±0.25.  
\*CORD AND CANOPY COME IN THE SAME COLOR.



- CY48** H-8" W-4"
- CY510** H-10" W-5"
- CY816** H-16" W-8"




- CY618** H-6" W-18"
- CY620** H-6" W-20"




- CYB510** H-10" W-5"
- CYB816** H-16" W-8"
- CYBU510** H-10" W-5"
- CYBU816** H-16" W-8"


\*FIXTURES COME AS SHOWN  
\*ALL MOUNTING OPTIONS DO NOT APPLY



- CG512** H-12" W-5"



- SD2012** H-12" W-20"




- PD2012** H-12" W-20"



**C - MOUNTING OPTIONS**

**STEM MOUNTS**

\*STEMS RATED FOR DAMP LOCATION

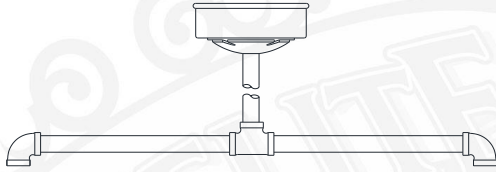


**DP24 DOUBLE PENDANT** 20"(H) 24"(W)  
\*DP24 COMES STANDARD WITH LSTC AND ST18



**ST(XX)** STEM- 1/2" NPT


XX = LENGTH OF STEM  
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)  
\*CANOPY NOT INCLUDED, ADD IN SECTION D  
\* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST




**SC24 SCROLL STEM** 33"(H) 26"(W)  
\*SC24 COMES STANDARD WITH LSTC

**LED CORD MOUNTS**


\*FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY. \*CORDS RATED FOR DRY LOCATION  
\*CANOPY DIMENSIONS: 4" (H) 5.5" (W) \*CORD AND CANOPY COME IN THE SAME COLOR.

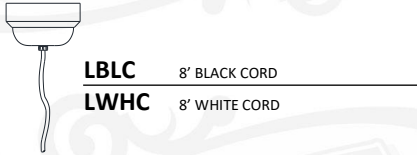


**LBLC** 8' BLACK CORD  
**LWHC** 8' WHITE CORD

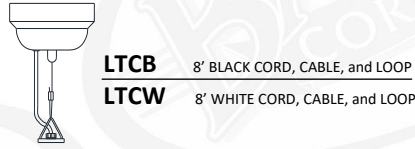


**LTCB** 8' BLACK CORD, CABLE, and LOOP  
**LTCW** 8' WHITE CORD, CABLE, and LOOP

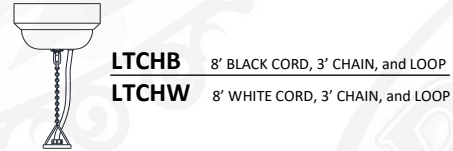


**LTCHB** 8' BLACK CORD, 3' CHAIN, and LOOP  
**LTCHW** 8' WHITE CORD, 3' CHAIN, and LOOP

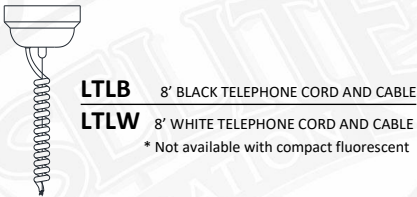


**LTLB** 8' BLACK TELEPHONE CORD AND CABLE  
**LTLW** 8' WHITE TELEPHONE CORD AND CABLE  
\* Not available with compact fluorescent

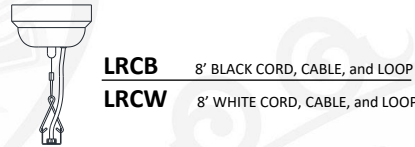


**LRCB** 8' BLACK CORD, CABLE, and LOOP  
**LRCW** 8' WHITE CORD, CABLE, and LOOP

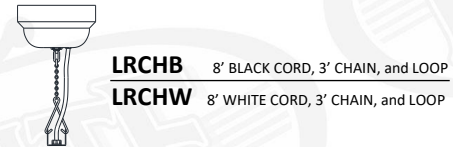


**LRCHB** 8' BLACK CORD, 3' CHAIN, and LOOP  
**LRCHW** 8' WHITE CORD, 3' CHAIN, and LOOP

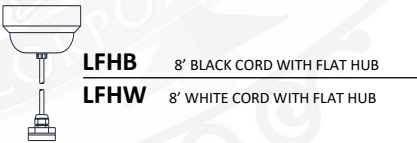

**LFHB** 8' BLACK CORD WITH FLAT HUB  
**LFHW** 8' WHITE CORD WITH FLAT HUB

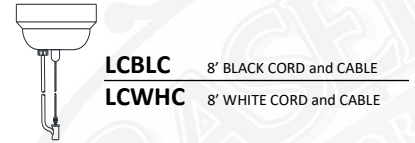

**LCBLC** 8' BLACK CORD and CABLE  
**LCWHC** 8' WHITE CORD and CABLE




**LCHB** 8' BLACK CORD, 3' CHAIN, and LOOP  
**LCHW** 8' WHITE CORD, 3' CHAIN, and LOOP  
\* Loop may vary due to shade style

**NOTES:**  
\*DISTANCE TO LAMP (CF) 10"  
\*All compact fluorescent and LED housings may vary in size according to light source chosen.


**D - MOUNTING ADD-ONS**

**LED - STEM AND ARM ADD-ONS**

\* FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



**LSLC** LED SLOPE CEILING CANOPY



**LSTC** LED STEM MOUNT CANOPY

