




# MACHINE AGE

SPECIFICATION SHEET



10S1.41.RCC.R26.CNK.48.10-40INC

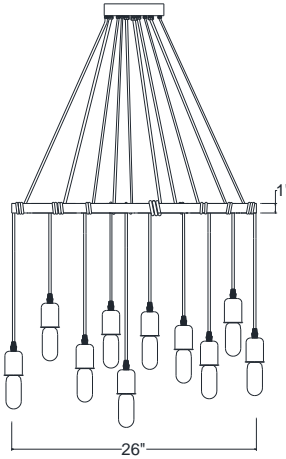

**MODEL: 10S1**

PREPARED BY: \_\_\_\_\_

TYPE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

CERTIFICATION: UL LISTED

**FINISH** – Five stage pretreatment process, coated with a lead free TGI C polyester powder coat finish. White is standard inside reflectors, \*some finish options excluded. See color chart below for color options (unless specified). Some finish options are not available for certain fixtures. Custom colors and Marine options are available upon request. **Finishes #14PN, 19, 20, 20PB, 20SB, 21, 22, 23, 39, 40, 57, 58, 88 do not apply to this fixture.**

**LAMP HOLDERS** – Accommodates **Incandescent/LED** bulb – medium base porcelain socket, copper shell with nickel plate, rated 250v, 660W.

**MOUNTING** – Available with cord mounting. Fixtures are pre-wired with 96” cords. Cords can be arranged to desired length.

**REFLECTOR** – Spun and fabricated from heavy gauge 1100-0 aluminum, ranging in thickness from .050 to .125. Aluminum square tubing in a 26” round diameter. Aluminum spun socket covers.

MODEL #	FINISH	LIGHT SOURCE				MOUNTING OPTIONS	ACCESSORIES
		INC	CF*	MH*	LED		
10S1	SEE THE FINISH OPTION CHART ON THE WEBSITE AT THE BOTTOM OF THE PAGE UNDER “PRODUCT INFORMATION.”	10-40W	N/A	N/A	N/A	CORD MOUNT	WG3, WG4, WG5, WG7, WH1

\* same finish color inside and out.  
\* remote ballast / driver.

.SUBJECT TO MODIFICATION WITHOUT NOTICE.

