




# MACHINE AGE

## SPECIFICATION SHEET

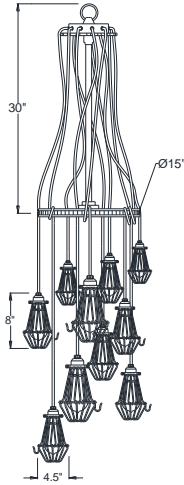

**MODEL: 10S2WG4**

PREPARED BY: \_\_\_\_\_

TYPE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

CERTIFICATION: UL LISTED

10S2WG4/21A/RCC/EXGRT/10/60INC

**FINISH** – Five stage pretreatment process, coated with a lead free TGI C polyester powder coat finish. White is standard inside reflectors, \*some finish options excluded. See color chart below for color options (unless specified). Some finish options are not available for certain fixtures. Custom colors and Marine options are available upon request. **Finishes #14PN, 20, 20PB, 20SB, 23, 39, 40, 57, 58, 88 do not apply to this fixture.**

**LAMP HOLDERS** – Accommodates **Incandescent/LED** bulb – medium base porcelain socket, copper shell with nickel plate, rated 250v.

**MOUNTING** – Fixtures are pre-wired with 96” cord. Available with cord or stem sets. Cords can be adjusted to the desired length by wrapping them around the cast aluminum gear.

**REFLECTOR** – Socket covers are spun from heavy gauge 1100-0 aluminum, ranging in thickness from .050 to .125. The gears are casted from a high grade 356 aluminum. Accompanied with decorative wire grills.

MODEL #	FINISH	LIGHT SOURCE				MOUNTING OPTIONS	ACCESSORIES
		INC	CF*	MH*	LED		
10S2WG4	SEE THE FINISH OPTION CHART ON THE WEBSITE AT THE BOTTOM OF THE PAGE UNDER “PRODUCT INFORMATION.”	60W	N/A	N/A	N/A	STEM MOUNT	WG3, WG4, WG5, WG7, WH1

\* same finish color inside and out.  
\* remote ballast / driver.

.SUBJECT TO MODIFICATION WITHOUT NOTICE.



BASELITE CORPORATION  
12260 EAST END AVE.  
CHINO, CA 91710

PH: 877-999-1990  
WEB: WWW.BASELITE.COM  
EMAIL: SALES@BASELITE.COM

