



BASELITE - ATOMIC – CF – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	/	/
	A	B	C	D	E	F	G	H	I	J	K
EXAMPLE:	W513	41	E16	SQ ½"	43	45W	3K	LDM120	PR3	GR13	44

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



AT16/59/BLC/150INC

A - SHADES

- ATOMIC**
AT16 - 42WCF (MAX)
AT18 - 42WCF (MAX)
AT20 - 42WCF (MAX)
J124 - 42WCF (MAX)
J114 - 42WCF (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)
 (*SEE NOTES FOR LIMITATIONS*)
 14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB,
 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40,
 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51,
 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64,
 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79,
 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91,
 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C – MOUNTING OPTIONS

- ½" ARM EXTENSIONS**
 E1, E2, E3, E4, B1, E16, E17, E27
- ¾" ARM EXTENSIONS**
 E3A, E4A, E5, E6, E7, E8, E9,
 E10, E11, E12, E13, B15, B15S,
 E19, E20, E21, E25
- E14 - CREATE YOUR OWN**
 (BASELITE WILL TAKE YOUR SKETCH AND
 FABRICATE A CUSTOM ARM EXTENSION TO
 MEET YOUR NEEDS).
- ½" WALL MOUNT**
 B13, WM13, WM13R, WM13X, B10,
 B11, B101
- ¾" WALL MOUNT**
 B9, B9C, B12, WM14, WM14X, WM15,
 WM18, WM35, WM35X, WM55,
 WM55X, WM60, WM60X, WM61,
 WM61X, WM70, WM70X, WM71,
 WM71X
- COMPACT FLUORESCENT CORD MOUNT**
 CFBLC, CFWHC, CFTCB, CFTCW, CFTCHB,
 CFTCHW, CFTLB, CFTLW, CFRCB, CFRCW
 CFRCHB, CFRCHW, CFFHB, CFFHW, CFHBLC,
 CFHWHC, CFCBLC, CFCWHC, CFCHB, CFCHW
- STEM MOUNT**
 ST6, ST12, ST18, ST24, ST36, ST48, STXX

D – MOUNTING ADD-ONS

- CF ADD-ONS**
 CFWTM, CFSLC, CFSTC
- UNIVERSAL ADD-ONS**
 SQ ½", SQ ¾", FH ½", FH ¾", TRB ½", TRB ¾",
 SWL, LGSWL, CNK, INB, RINB

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)
COMPACT FLUORESCENT (CF)
 26W, 32W, 42W (MAX)

G – LED COLOR TEMP

NOT AVAILABLE

H – ELECTRICAL OPTION

(SEE PAGE 4 FOR DIMMING OPTION SPECIFICATIONS)
CDM-120
CDM-277
CDM-120/277

I – GLASS OPTIONS

- CL3, CL4, CLT3, CLT4, BL3, BL4, RE3, RE4,
 GR3, GR4, AH3, AH4, FR3, FR4, FRT3, FRT4,
 PR3, PR4, BA, BAX, BAF, PR8, PR8F

J – ACCESSORIES


- GU-1, GU-2, WG-1, WG-2

K – ACCESSORY COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

NOTES

- (1). FINISH OPTIONS 20, 21, 22, 23 ARE FOR SOLID BRASS FIXTURES ONLY.
 - (2). FINISH OPTIONS 19, 21, 22, 23, 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
 - (3). FINISH OPTIONS 19, 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
 - (4). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
 - (5). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
- *ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
- *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.)
- *ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.
- *FIXTURE DIMENSIONS MAY VARY ±0.25.
- *CORD AND CANOPY COME IN THE SAME COLOR.



- AT16** H-13" W-16"
AT18 H-13" W-18"
AT20 H-13" W-20"




- J114** H-2.25" W-14"
J124 H-5" W-24"



C - MOUNTING OPTIONS


1/2" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

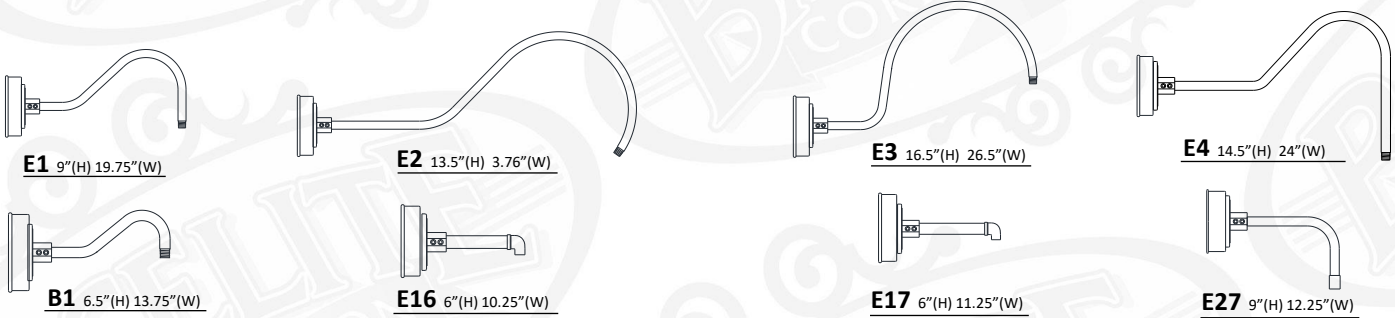

3/4" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

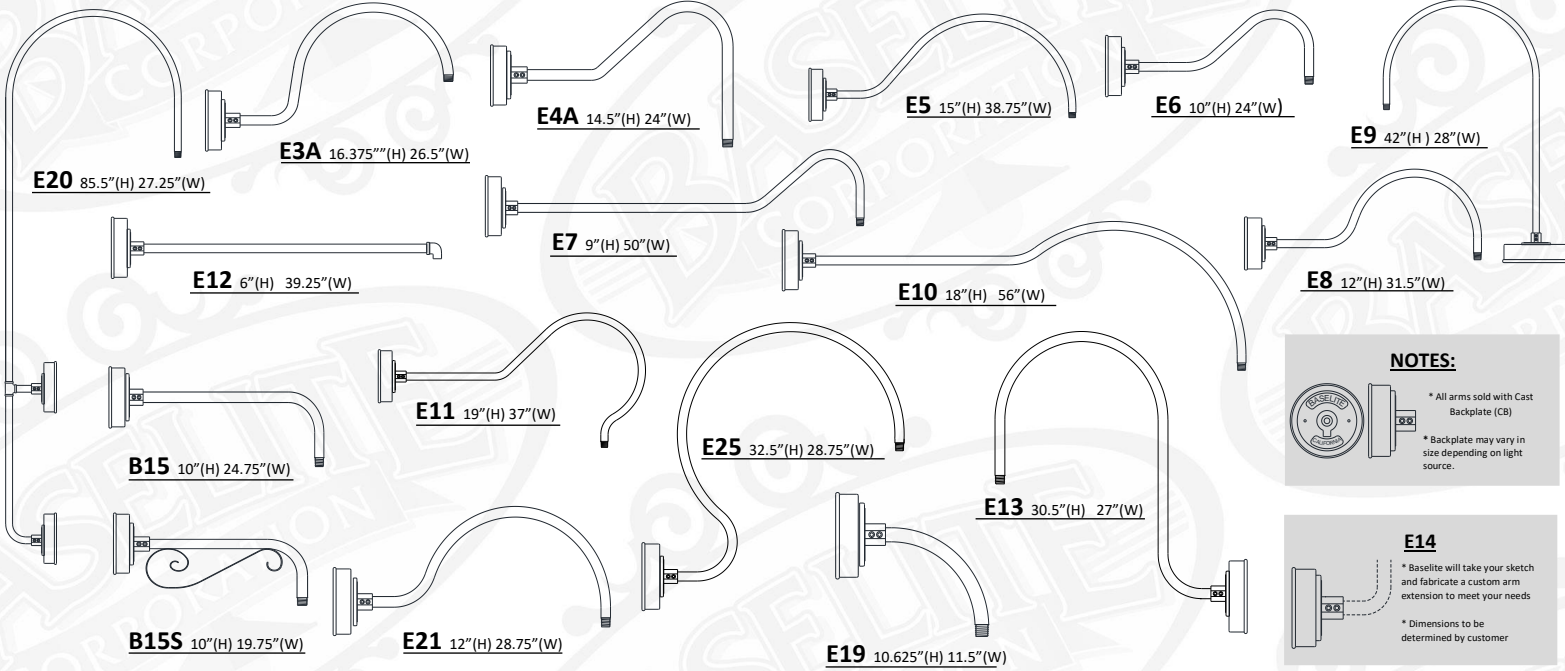


NOTES:
 * All arms sold with Cast Backplate (CB)
* Backplate may vary in size depending on light source.

E14
* Baselite will take your sketch and fabricate a custom arm extension to meet your needs
* Dimensions to be determined by customer


1/2" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED

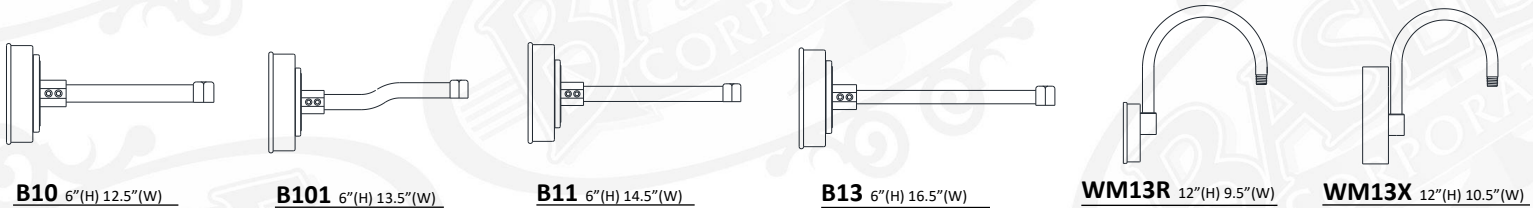

3/4" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED

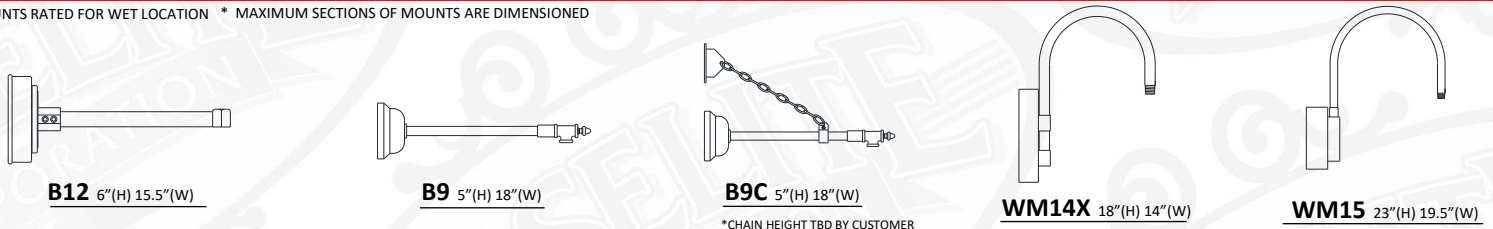

*CHAIN HEIGHT TBD BY CUSTOMER



C - MOUNTING OPTIONS (CONTINUED)

3/4" WALL MOUNTS


*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED




WM35X 26"(H) 22"(W)




WM55X 19"(H) 27"(W)




WM60X 18"(H) 22"(W)



WM61X 18"(H) 22"(W)




WM70X 18"(H) 22"(W)



WM71X 18"(H) 22"(W)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

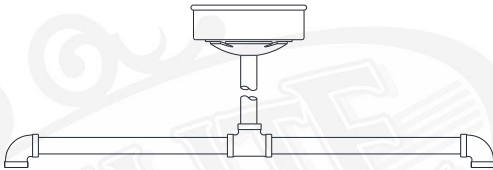


DP24 DOUBLE PENDANT 20"(H) 24"(W)

*DP24 COMES STANDARD WITH CFSTC AND ST18



ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM
(EXAMPLE -- "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D
* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST



SC24 SCROLL STEM 33"(H) 26"(W)

*SC24 COMES STANDARD WITH CFSTC

COMPACT FLUORESCENT CORD MOUNTS

FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.
*CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: 4" (H) 5.5" (W) *CORD AND CANOPY COME IN THE SAME COLOR.



CFBLC 8' BLACK CORD
CFWHC 8' WHITE CORD




CFTCB 8' BLACK CORD, CABLE, and LOOP
CFTCW 8' WHITE CORD, CABLE, and LOOP



CFTCHB 8' BLACK CORD, 3' CHAIN, and LOOP
CFTCHW 8' WHITE CORD, 3' CHAIN, and LOOP



CFRCB 8' BLACK CORD, CABLE, and LOOP
CFRCW 8' WHITE CORD, CABLE, and LOOP



CFRCHB 8' BLACK CORD, 3' CHAIN, and LOOP
CFRCHW 8' WHITE CORD, 3' CHAIN, and LOOP



CFCWB 8' BLACK CORD, 3' CHAIN, and LOOP
CFCWHW 8' WHITE CORD, 3' CHAIN, and LOOP


* Loop may vary due to shade style



CFFHB 8' BLACK CORD WITH FLAT HUB
CFFHW 8' WHITE CORD WITH FLAT HUB



CFCBLC 8' BLACK CORD and CABLE
CFCWHC 8' WHITE CORD and CABLE



NOTES:


*DISTANCE TO LAMP (CF) 10"
*All compact fluorescent and LED housings may vary in size according to light source chosen.




D - MOUNTING ADD-ONS

COMPACT FLUORESCENT - STEM AND ARM ADD-ONS


* FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



CFWTM WEATHERTIGHT CF WALL MOUNT



CFSLC CF SLOPE CEILING CANOPY



CFSTC CF STEM MOUNT CANOPY

UNIVERSAL STEM AND ARM ADD-ONS


* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:

MODEL #: -/-/-.LWTM, TRB 1/2", LGSWL/-/-/-/-/-/-/-/-/-
A B C D E F G H I J K




CNK CANOPY For MULTIPLE FIXTURES


*CNK dimensions vary on number of fixtures applied



LGSWL 1/2" NPT SWIVEL
For all shades greater than 7" wide in diameter



FH 1/2" FLAT HUB 1/2"
FH 3/4" FLAT HUB 3/4"



TRB 1/2"-4' Cable SUPPORT
TRB 3/4"-4' Cable SUPPORT

F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

COMPACT FLUORESCENT (CF)

CF 42W (MAX)- AT16, AT18, AT20, J114, J124

*IMPORTANT – FOR COMPACT FLUORESCENT (CF) LIGHT SOURCE, FIXTURES ARE LIMITED DUE TO THE SIZE OF THE SHADE. PLEASE SEE THE CHART TO THE LEFT TO SEE WHAT WATTAGE IS COMPARABLE FOR EACH FIXTURE WHEN ORDERING.

EXAMPLE: /CF42W /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
26WCF	26W	PER BULB SPEC	>90	120-277 VAC	See section "H"
32WCF	32W	PER BULB SPEC	>90	120-277 VAC	See section "H"
42WCF	42W	PER BULB SPEC	>90	120-277 VAC	See section "H"

H – ELECTRICAL OPTION

MOST BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES. PLEASE SEE NOTES BELOW AND FOR FURTHER DETAILS CONTACT THE FACTORY. FOR DIMMING BALLAST OPTION, PLEASE CHOOSE MARK X OR MARK VII, SO RESTRICTIONS APPLY DUE TO THE SIZE OF THE BALLAST AND FIXTURE.

COMPACT FLUORESCENT DIMMING OPTIONS

PROVIDED WITH ADVANCE TRANSFORMER, PLEASE CHOOSE MARK 10 OR MARK 7 WITH SPECIFIED VOLTAGE FROM THE LIST BELOW. CONTACT BALLAST MANUFACTURER FOR SPECIFICATIONS.

CDM7-120/277 - ADVANCE MARK 7 0-10V ELECTRICAL BALLAST – 120/277 VOLT

CDM10-120 - ADVANCE MARK 10 TRI-ELV ELECTRICAL BALLAST – 120 VOLT

CDM10-277 - ADVANCE MARK 10 TRI-ELV ELECTRICAL BALLAST – 277 VOLT

NOTES:

FOR COMPACT FLUORESCENT DIMMING OPTION:

MARK 7 – 120 THROUGH 277V. BALLASTS MAY BE REMOTE MOUNTED UP TO 6 IN. AWAY

FROM LAMPS. 100% - 3% FULL RANGE CONTINUOUS DIMMING. SOME LIGHT MANUFACTURERS RECOMMEND BURNING IN NEW LAMPS 100 HOURS AT FULL LIGHT OUTPUT BEFORE DIMMING. CONSULT LIGHT MANUFACTURER.

MARK 10 – 120V ONLY. ONE AND TWO-LAMP BALLASTS MAY BE REMOTE MOUNTED UP TO 6 FT. AWAY FROM LAMPS. THREE LAMP BALLASTS MAY NOT BE REMOTE MOUNTED. 100% - 5% FULL RANGE CONTINUOUS DIMMING. SOME LIGHT MANUFACTURERS RECOMMEND BURNING IN NEW LAMPS 100 HOURS AT FULL LIGHT OUTPUT BEFORE DIMMING. CONSULT LIGHT MANUFACTURER.



I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.



- CL3** 3" CLEAR GLASS
- CL4** 4" CLEAR GLASS
- CLT3** 3" CLEAR TEMPERED
- CLT4** 4" CLEAR TEMPERED



- PR3** 3" PRISMATIC GLASS
- PR4** 4" PRISMATIC GLASS



- RE3** 3" RED GLASS
- RE4** 4" RED GLASS



- BL3** 3" BLUE GLASS
- BL4** 4" BLUE GLASS



- BAX** 9" CLEAR GLOBE
- BAF** 9" FROSTED GLOBE
(200W INC MAX/LED25W)




- FR3** 3" FROSTED GLASS
- FR4** 4" FROSTED GLASS
- FRT3** 3" FROSTED TEMPERED
- FRT4** 4" FROSTED TEMPERED



- AH3** 3" AMBER HYDE GLASS
- AH4** 4" AMBER HYDE GLASS



- GR3** 3" GREEN GLASS
- GR4** 4" GREEN GLASS




- BA7** 7" CLEAR GLOBE
- BA7F** 7" FROSTED GLOBE
(100W INC MAX/LED25W)


GLASS – DIMENSIONS	
3" GLASS	
Diameter	3.34"
Height	6.93"
Fitter	3.29"
4" GLASS	
Diameter	4.34"
Height	8.37"
Fitter	4.29"

GLASS – MAX WATTAGE	
3" GLASS – 100W INC / LED12W	
4" GLASS – 200W INC / LED25W	


J – ACCESSORIES




WG-1 WIRE GUARD



WG-2 WIRE GUARD



GU-1 CAST ALUMINUM GUARD



GU-2 CAST GUARD