



BASELITE - COSMO – CF – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

| | | | | | | | | | | | |
|----------|-------|----|-----|------|----|-----|----|--------|-----|-------|----|
| MODEL # | / | / | / | / | / | / | / | / | / | / | / |
| EXAMPLE: | A | B | C | D | E | F | G | H | I | J | K |
| | COS16 | 41 | B10 | LWTM | 43 | 25W | 3K | LDM120 | AH3 | BLE16 | 44 |

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



CO7/74/WM13R/74/25WLED

A - SHADES

COSMO

- CO6 - 26WCF (MAX)
- CO7 - 26WCF (MAX)
- CO8 - 32WCF (MAX)
- CO10 - 26WCF (MAX)
- CO15 - 42WCF (MAX)
- COS12 - 42WCF (MAX)
- COS16 - 42WCF (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)
 (*SEE NOTES FOR LIMITATIONS*)
 14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB,
 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40,
 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51,
 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64,
 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79,
 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91,
 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C – MOUNTING OPTIONS

- 1/2" ARM EXTENSIONS
E1, E2, E3, E4, B1, E16, E17, E27
- 3/4" ARM EXTENSIONS
E3A, E4A, E5, E6, E7, E8, E9,
E10, E11, E12, E13, B15, B15S,
E19, E20, E21, E25
- E14 - CREATE YOUR OWN
(BASELITE WILL TAKE YOUR SKETCH AND
FABRICATE A CUSTOM ARM EXTENSION TO
MEET YOUR NEEDS).
- 1/4" WALL MOUNT
WM19, WM20, WM21, WM23, WM24,
WM25, WM26, WM29, WM29V
- 1/2" WALL MOUNT
B13, WM13, WM13R, WM13X, B10,
B11, B101
- 3/4" WALL MOUNT
B9, B9C, B12, WM14, WM14X, WM15,
WM35X, WM55X, WM60X, WM61X,
WM70X, WM71X
- COMPACT FLUORESCENT CORD MOUNT
CFBLC, CFWHC, CFTCB, CFTCW, CFTCHB,
CFTCHW, CFTLB, CFTLW, CFRCB, CFRCW
CFRCHB, CFRCHW, CFFHB, CFFHW, CFHBLC,
CFHWHC, CFCBLC, CFCWHC, FCCHB, FCCHW
- STEM MOUNT
ST6, ST12, ST18, ST24, ST36, ST48, STXX

D – MOUNTING ADD-ONS

- CF ADD-ONS
CFWTM, CFSLC, CFSTC
- UNIVERSAL ADD-ONS
SQ 1/2", SQ 3/4", FH 1/2", FH 3/4", TRB 1/2", TRB 3/4",
SWL, LGSWL, CNK, INB, RINB

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)
COMPACT FLUORESCENT (CF)
 26W 32W 42W

G – LED COLOR TEMP

- 27K – 2700 K
- 3K – 3000 K
- 35K – 3500 K
- 4K – 4000 K
- 5K – 5000 K

H – ELECTRICAL OPTION

(SEE PAGE 4 FOR DIMMING OPTION
 SPECIFICATIONS)
CDM7-120/277
CDM10-120
CDM10-277

I – GLASS OPTIONS

- CL3, CL4, CLT3, CLT4, BL3, BL4, RE3, RE4,
GR3, GR4, AH3, AH4, FR3, FR4, FRT3, FRT4,
PR3, PR4

J – ACCESSORIES


- GR12, GR15, GR16, LGR12, LGR15, LRG16,
CRL12, CRL15, CRL16, FLE12, FLE15, FLE16,
FGR12, FGR15, FGR16, GU-1, GU-2, WG-1,
WG-2, BLE12, BLE16, SLE12, SLE15

K – ACCESSORY COLOR


SEE SECTION "B" FOR COLOR OPTIONS.

NOTES

- FINISH OPTIONS 20, 21, 22, 23 ARE FOR SOLID BRASS FIXTURES ONLY.
 - FINISH OPTIONS 19, 21, 22, 23, 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
 - FINISH OPTIONS 19, 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
 - FINISH OPTIONS FOR SHADES ≤ 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES > 10" IN DIAMETER ARE WHITE ON THE INSIDE.
 - FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
 - COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
- *ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
 *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).
 *ALL FIXTURES MOUNT TO A 4-0 JUNCTION BOX.
 *FIXTURE DIMENSIONS MAY VARY ± 0.25.
 *CORD AND CANOPY COME IN THE SAME COLOR.




CO6 H-11.5" W-7"




CO7 H-10" W-7"

CO8 H-13" W-8"



CO10 H-10.5" W-10"



CO15 H-19" W-15"



COS12 H-11" W-12"


COS16 H-14" W-16"




C - MOUNTING OPTIONS

1/2" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED




E1 9"(H) 19.75"(W)




E2 13.5"(H) 36.75"(W)




E3 16.5"(H) 26.5"(W)




E4 14.5"(H) 24"(W)




B1 6.5"(H) 13.75"(W)



E16 6"(H) 10.25"(W)




E17 6"(H) 11.5"(W)




E27 9"(H) 12.25"(W)

3/4" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED




E20 85.5"(H) 27.25"(W)




E3A 16.375"(H) 26.5"(W)




E4A 14.5"(H) 24"(W)




E5 15"(H) 38.75"(W)




E6 10"(H) 24"(W)




E9 42"(H) 28"(W)




E12 6"(H) 39.25"(W)




E7 9"(H) 50"(W)




E10 18"(H) 56"(W)




E8 12"(H) 31.5"(W)




B15 10"(H) 24.75"(W)




E11 19"(H) 37"(W)




E25 32.5"(H) 28.75"(W)




E13 30.5"(H) 27"(W)



B15S 10"(H) 19.75"(W)




E21 12"(H) 28.75"(W)

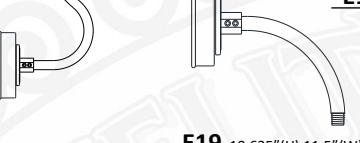


E19 10.625"(H) 11.5"(W)

NOTES:



- * All arms sold with Cast Backplate (CB)
- * Backplate may vary in size depending on light source.


E14




- * Baselite will take your sketch and fabricate a custom arm extension to meet your needs
- * Dimensions to be determined by customer

1/2" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



B10 6"(H) 12.5"(W)




B101 6"(H) 13.5"(W)




B11 6"(H) 14.5"(W)



B13 6"(H) 16.5"(W)



WM13R 12"(H) 9.5"(W)



WM13X 12"(H) 10.5"(W)

3/4" WALL MOUNTS


*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



B12 6"(H) 15.5"(W)




B9 5"(H) 18"(W)




B9C 5"(H) 18"(W)

*CHAIN HEIGHT TBD BY CUSTOMER



WM14X 18"(H) 14"(W)




WM15 23"(H) 19.5"(W)



C - MOUNTING OPTIONS (CONTINUED)

3/4" WALL MOUNTS


*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED




WM35X 26"(H) 22"(W)




WM55X 19"(H) 27"(W)




WM60X 18"(H) 22"(W)



WM61X 18"(H) 22"(W)




WM70X 18"(H) 22"(W)



WM71X 18"(H) 22"(W)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

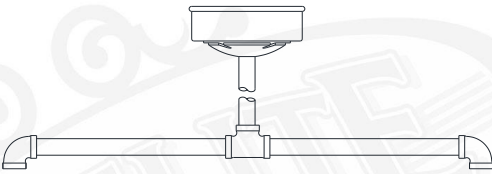


DP24 DOUBLE PENDANT 20"(H) 24"(W)

*DP24 COMES STANDARD WITH CFSTC AND ST18



ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D
* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST



SC24 SCROLL STEM 33"(H) 26"(W)

*SC24 COMES STANDARD WITH CFSTC

COMPACT FLUORESCENT CORD MOUNTS

FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.

*CORDS RATED FOR DRY LOCATION

*CANOPY DIMENSIONS: 4" (H) 5.5" (W)

*CORD AND CANOPY COME IN THE SAME COLOR.



CFBLC 8' BLACK CORD

CFWHC 8' WHITE CORD



CFTCB 8' BLACK CORD, CABLE, and LOOP

CFTCW 8' WHITE CORD, CABLE, and LOOP



CFTCHB 8' BLACK CORD, 3' CHAIN, and LOOP

CFTCHW 8' WHITE CORD, 3' CHAIN, and LOOP



CFRCB 8' BLACK CORD, CABLE, and LOOP

CFRCW 8' WHITE CORD, CABLE, and LOOP



CFRCHB 8' BLACK CORD, 3' CHAIN, and LOOP

CFRCHW 8' WHITE CORD, 3' CHAIN, and LOOP



CFCHB 8' BLACK CORD, 3' CHAIN, and LOOP

CFCHW 8' WHITE CORD, 3' CHAIN, and LOOP

* Loop may vary due to shade style




CFFHB 8' BLACK CORD WITH FLAT HUB

CFFHW 8' WHITE CORD WITH FLAT HUB



CFCBLC 8' BLACK CORD and CABLE

CFCWHC 8' WHITE CORD and CABLE



NOTES:

*DISTANCE TO LAMP (CF) 10"


*All compact fluorescent and LED housings may vary in size according to light source chosen.




D - MOUNTING ADD-ONS

COMPACT FLUORESCENT - STEM AND ARM ADD-ONS


* FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



CFWTM WEATHERTIGHT CF WALL MOUNT



CFSLC CF SLOPE CEILING CANOPY



CFSTC CF STEM MOUNT CANOPY

UNIVERSAL STEM AND ARM ADD-ONS


* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:

MODEL #: -/-/-LWTM, TRB 1/2", LGSWL / -/-/-/-/-/-/-/-
A B C D E F G H I J K




CNK CANOPY For MULTIPLE FIXTURES


*CNK dimensions vary on number of fixtures applied



LGSWL 1/2" NPT SWIVEL
For all shades greater than 7" wide in diameter



FH 1/2" FLAT HUB 1/2"
FH 3/4" FLAT HUB 3/4"



TRB 1/2"-4' Cable SUPPORT
TRB 3/4"-4' Cable SUPPORT

F - LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

COMPACT FLUORESCENT (CF)

CF 26W(MAX)- CO6, CO7
CF 26W, 32W(MAX)- CO8
CF 26W, 32W, OR 42(MAX)- CO15, COS12, COS16

*IMPORTANT - FOR COMPACT FLUORESCENT (CF) LIGHT SOURCE, FIXTURES ARE LIMITED DUE TO THE SIZE OF THE SHADE. PLEASE SEE THE CHART TO THE LEFT TO SEE WHAT WATTAGE IS COMPARABLE FOR EACH FIXTURE WHEN ORDERING.

EXAMPLE: / CF42W /

| OPTION | WATTAGE | LUMENS | CRI | VOLTAGE | DIMMING |
|--------|---------|----------------|-----|-------------|-----------------|
| CF26W | 26W | PER BULB SPECS | >90 | 120-277 VAC | See section "H" |
| CF32W | 32W | PER BULB SPECS | >90 | 120-277 VAC | See section "H" |
| CF42W | 42W | PER BULB SPECS | >90 | 120-277 VAC | See section "H" |

H - ELECTRICAL OPTION

MOST BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES. PLEASE SEE NOTES BELOW AND FOR FURTHER DETAILS CONTACT THE FACTORY. FOR DIMMING BALLAST OPTION, PLEASE CHOOSE MARK X OR MARK VII, SO RESTRICTIONS APPLY DUE TO THE SIZE OF THE BALLAST AND FIXTURE.

COMPACT FLUORESCENT DIMMING OPTIONS

PROVIDED WITH ADVANCE TRANSFORMER, PLEASE CHOOSE MARK 10 OR MARK 7 WITH SPECIFIED VOLTAGE FROM THE LIST BELOW. CONTACT BALLAST MANUFACTURER FOR SPECIFICATIONS.

- CDM7-120/277** - ADVANCE MARK 7 0-10v ELECTRICAL BALLST - 120/277 VOLT
- CDM10-120** - ADVANCE MARK 10 TRI-ELV ELECTRICAL BALLST - 120 VOLT
- CDM10-277** - ADVANCE MARK 10 TRI-ELV ELECTRICAL BALLST - 277 VOLT



I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.



CL3 3" CLEAR GLASS

CL4 4" CLEAR GLASS

CLT3 3" CLEAR TEMPERED

CLT4 4" CLEAR TEMPERED



PR3 3" PRISMATIC GLASS

PR4 4" PRISMATIC GLASS




RE3 3" RED GLASS

RE4 4" RED GLASS



BL3 3" BLUE GLASS

BL4 4" BLUE GLASS



| GLASS – DIMENSIONS | |
|--------------------|-------|
| 3" GLASS | |
| Diameter | 3.34" |
| Height | 6.93" |
| Fitter | 3.29" |
| 4" GLASS | |
| Diameter | 4.34" |
| Height | 8.37" |
| Fitter | 4.29" |



FR3 3" FROSTED GLASS

FR4 4" FROSTED GLASS

FRT3 3" FROSTED TEMPERED

FRT4 4" FROSTED TEMPERED



AH3 3" AMBER HYDE GLASS

AH4 4" AMBER HYDE GLASS




GR3 3" GREEN GLASS

GR4 4" GREEN GLASS

| GLASS – MAX WATTAGE | |
|---------------------|-------------------|
| 3" GLASS | 100W INC / LED12W |
| 4" GLASS | 200W INC / LED25W |


J – ACCESSORIES



GR12 12" WIRE GRILL

GR15 15" WIRE GRILL


GR16 16" WIRE GRILL



LGR12 12" LOUVERED GRILL

LGR15 15" LOUVERED GRILL

LGR16 16" LOUVERED GRILL



FGR12 12" FLAT GRILL

FGR15 15" FLAT GRILL


FGR16 16" FLAT GRILL



CRL12 12" CURVED POLYCARB LENS

CRL15 15" CURVED POLYCARB LENS

CRL16 16" CURVED POLYCARB LENS




SLE12 12" CLEAR ACRYLIC LENS

SLE15 16" CLEAR ACRYLIC LENS



BLE12 12" BAND WITH FROSTED ACRYLIC LENS


BLE16 16" BAND WITH FROSTED ACRYLIC LENS




FLE12 12" FLAT CLEAR LENS

FLE15 15" FLAT CLEAR LENS


FLE16 16" FLAT CLEAR LENS




WG-1 WIRE GUARD



WG-2 WIRE GUARD



GU-1 CAST ALUMINUM GUARD



GU-2 CAST GUARD