



BASELITE – LP-LH-LF – LED – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	X	/
A	B	C	D	E	F	G	H	I	J	K	
EXAMPLE: LH1	41	E16	CB 1/2"	43	45W	3K	LDM120	FR3	-	44	

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:

A - SHADES

LP SERIES

LP1 - 12WLED (MAX), (3" GLASS), (3" GUARD)

LP1R - 12WLED (MAX), (3" GLASS), (3" GUARD)

LP2 - 25WLED (MAX), (4" GLASS), (4" GUARD)

LH SERIES

LH1 - 12WLED (MAX), (3" GLASS), (3" GUARD)

LH2 - 25WLED (MAX), (4" GLASS), (4" GUARD)

LF SERIES

LF1 - 12WLED (MAX), (3" GLASS), (3" GUARD)

LF2 - 25WLED (MAX), (4" GLASS), (4" GUARD)

B - FINISH OPTIONS

(*SEE NOTES FOR LIMITATIONS*)

(SEE WEBSITE FOR SWATCH COLORS)

20, 21, 22, 23, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 59, 60, 61, 62, 63, 70, 71, 72, 73

D - MOUNTING ADD-ONS

LED ADD-ONS

LWTM, LSLC, LSTC

UNIVERSAL ADD-ONS

FH 1/2", FH 3/4", LGSWL

E - MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F - LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)

LIGHT EMITTED DIODE (LED)

10W, 12W, 25W

*NOTE – MAX WATTAGE IS LISTED NEXT TO THE SHADE MODEL NUMBER IN SECTION "A". ALL WATTAGES BELOW THAT ARE ALSO AVAILABLE FOR THE SAME MODEL NUMBER.

K - ACCESSORY COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

NOTES

(1). FINISH OPTIONS 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.

(2). FINISH OPTIONS 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.

(3). FINISH OPTIONS FOR SHADES \leq 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES $>$ 10" IN DIAMETER ARE WHITE ON THE INSIDE.

(4). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.

(5). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.

*ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).

*ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).

*ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.

*FIXTURE DIMENSIONS MAY VARY \pm 0.25.

*CORD AND CANOPY COME IN THE SAME COLOR.

*RATED FOR WET LOCATION.

G - LED COLOR TEMP

27K – 2700 KELVIN

3K – 3000 KELVIN

35K – 3500 KELVIN

4K – 4000 KELVIN

5K – 5000 KELVIN

H - ELECTRICAL OPTION

(SEE PAGE 4 FOR DIMMING OPTION SPECIFICATIONS)

LDM120

LDM0-10

I - GLASS OPTIONS

3" GLASS (AVAILABLE FOR LP1, LH1 & LF1)

CL3, CLT3, BL3, RE3, GR3,

AH3, FR3, FRT3, PR3

4" GLASS (AVAILABLE FOR LP2, LH2 & LF2)

CL4, CLT4, BL4, RE4, GR4,


AH4, FR4, FRT4, PR4

J - ACCESSORIES


NOT AVAILABLE




LH1/58/E16/CB3/4"/58/100INC/FR3



LP1 H - 10" W - 9"
LP2 H - 12" W - 9"




LP1R H - 8.75" W - 5.375"



LH1 H - 11.75" W - 9" PROJ. - 12.5"

LH2 H - 13.75" W - 9" PROJ. - 12.5"

E16 ARM EXT. COMES STANDARD WITH LH1 & LH2. NO OTHER MOUNTING APPLIES



LF1 H - 9" W - 7"

LF2 H - 10.75" W - 9"

Fixture comes as is. No other mounting applies



BASELITE VAPOR JAR CATALOG

PROJECT NAME: _____
PROJECT TYPE: _____


C - MOUNTING OPTIONS

1/2" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED




E1 9"(H) 19.75"(W)




E3 16.5"(H) 26.5"(W)




E4 14.5"(H) 24"(W)



B1 6.5"(H) 13.75"(W)



E16 6"(H) 10.25"(W)



E17 6"(H) 11.25"(W)

3/4" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED



E20 85.5"(H) 27.25"(W)



E3A 16.375"(H) 26.5"(W)

E4A 14.5"(H) 24"(W)


E5 15"(H) 38.75"(W)

E6 10"(H) 24"(W)

E9 42"(H) 28"(W)



E7 9"(H) 50"(W)




E8 12"(H) 31.5"(W)



E12 6"(H) 39.25"(W)


E10 18"(H) 56"(W)



B15 10"(H) 24.75"(W)


E11 19"(H) 37"(W)

E13 30.5"(H) 27"(W)




Baseelite will take your sketch and fabricate a custom arm extension to meet your needs

All arms sold with
Cast Backplate (CB)



E14 TBD"(H) TBD"(W)



B15S 10"(H) 19.75"(W)

E21 12"(H) 28.75"(W)




E25 32.5"(H) 28.75"(W)

E19 10.625"(H) 11.5"(W)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

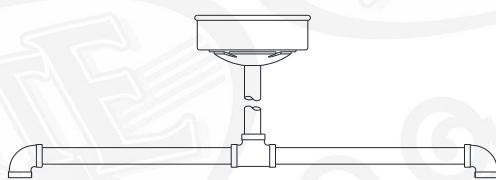

DP24 DOUBLE PENDANT 20"(H) 24"(W)

*DP24 COMES STANDARD WITH LSTC AND ST18



ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM

(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)

*CANOPY NOT INCLUDED, ADD IN SECTION D

* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST



BASELITE VAPOR JAR CATALOG

PROJECT NAME: _____
PROJECT TYPE: _____

F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

LIGHT EMITTING DIODE (LED)

LED 12W (MAX) - LP1, LP1R, LH1, LF1
LED 25W (MAX) - LP2, LH2, LF2

***IMPORTANT** – FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE MAX WATTAGE AVAILABILITY. **EXAMPLE: / LED25W /**

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
LED10WF	10W	1280	>90	120-277 VAC	TRI-ELV *120V ONLY
LED12W	12W	1481	>90	120-277 VAC	See section "H"
LED25W	25W	2812	>90	120-277 VAC	See section "H"

@3500K

H – ELECTRICAL OPTION

BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES, SO RESTRICTIONS APPLY DUE TO THE SIZE OF THE DRIVER AND FIXTURE. PLEASE SEE INFORMATION BELOW AND FOR FURTHER DETAILS CONTACT THE FACTORY.

LED DIMMING OPTIONS

(LED10WF – ONLY AVAILABLE WITH **LDM120** – TRI-ELV DIMMING OPTON) ALL OTHER WATTAGES CAN CHOOSE FROM THE OPTIONS BELOW. CONTACT DRIVER MANUFACTURER FOR FURTHER SPECIFICATIONS.

LDM120 – TRIAC / ELV – INPUT 120 / 277V – DIMMING AT 120 VOLT ONLY

LDM0-10V – 0 – 10V – DIMMING AT 120 / 277 VOLTS

I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION. *3" GLASS AVAILABLE FOR LP1, LH1 & LF1 *4" GLASS AVAILABLE FOR LP2, LH2 & LF2



CL3 3" CLEAR GLASS

CL4 4" CLEAR GLASS

CLT3 3" CLEAR TEMPERED

CLT4 4" CLEAR TEMPERED



PR3 3" PRISMATIC GLASS

PR4 4" PRISMATIC GLASS



RE3 3" RED GLASS

RE4 4" RED GLASS



BL3 3" BLUE GLASS

BL4 4" BLUE GLASS



FR3 3" FROSTED GLASS

FR4 4" FROSTED GLASS

FRT3 3" FROSTED TEMPERED

FRT4 4" FROSTED TEMPERED




AH3 3" AMBER HYDE GLASS

AH4 4" AMBER HYDE GLASS



GR3 3" GREEN GLASS

GR4 4" GREEN GLASS



GLASS – DIMENSIONS
3" GLASS
Diameter 3.34"
Height 6.93"
Fitter 3.29"
4" GLASS
Diameter 4.34"
Height 8.37"
Fitter 4.29"

GLASS – MAX WATTAGE
3" GLASS – 100W INC / LED12W
4" GLASS – 200W INC / LED25W