
BASSELINATION TO ST

BASELITE - METRO – INC – SPECIFICATION SHEET



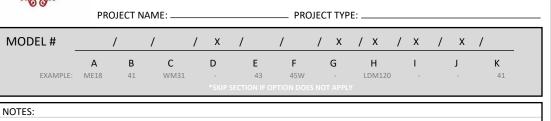

A - SHADES

METRO

ME18 – 150WINC (MAX) ME24 – 150WINC (MAX) MER18 – 150WINC (MAX) MER24 – 150WINC (MAX) MES18 – 150WINC (MAX) MES24 – 150WINC (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS) (*SEE NOTES FOR LIMITATIONS*) 14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB, 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C – MOUNTING OPTIONS

E14 - CREATE YOUR OWN

(BASELITE WILL TAKE YOUR SKETCH AND FABRICATE A CUSTOM ARM EXTENSION TO MEET YOUR NEEDS).

<u>%" WALL MOUNT</u> WM31 POST MOUNTS SEE WEBSITE FOR POST MOUNT OPTIONS POLE MOUNTS

SEE WEBSITE FOR POLE MOUNT OPTIONS

D – MOUNTING ADD-ONS

NOT AVAILABLE

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 2 FOR WATTAGE LIMITATIONS) INCANDESCENT (INC) 150W (MAX)

G – LED COLOR TEMP

NOT AVAILABLE

H – ELECTRICAL OPTION

NOT AVAILABLE

I – GLASS OPTIONS

NOT AVAILABLE

J – ACCESSORIES

NOT AVAILABLE


K – ACCESSORY COLOR


SEE SECTION "B" FOR COLOR OPTIONS.

NOTES


(1). FINISH OPTIONS 20, 21, 22, 23 ARE FOR SOLID BRASS FIXTURES ONLY. (2). FINISH OPTIONS 19, 21, 22, 23, 75,76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY. (3). FINISH OPTIONS 19, 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE. (4). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS. (5). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS. *ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.). *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.). *ALL FIXTURES MOUNT TO A 4-O

*ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX. *FIXTURE DIMENSIONS MAY VARY ± 0.25.









MES24 H-27" W-24"

PAGE 1

BASEULTE CORPORATION


BASELITE RLM CATALOG

PROJECT NAME: _____ PROJECT TYPE: ____

C – MOUNTING OPTIONS

3/4" WALL MOUNTS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED



F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

INCANDESCENT (INC) MED E26					
INC 150W - ME18, ME24, MER18, MER24, MES18, MES24		DUE TO SIZE OF THE FIXTURE	*IMPORTANT – FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILIT CHART TO THE LEFT. EXAMPLE: / INC150W /		
OPTION	WATTAGE	LUMENS	VOLTAGE	DIMMING	