



# BASELITE – P - HP – LED – SPECIFICATION SHEET



PROJECT NAME: \_\_\_\_\_ PROJECT TYPE: \_\_\_\_\_

MODEL #	/	/	/	X	/	X	/	/	/	/	/	/
A	B	C	D	E	F	G	H	I	J	K		
EXAMPLE: HP2	41	BLC	-	-	25WLED	3K	LDM120	FR4	CG2	41		

\*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



HP2/62/BLC/100WINC/FR4/CG2/62

## A - SHADES

### P-HP SERIES

**P1** - 12WLED (MAX), (3" GLASS), (3" GUARD)

**P2** - 25WLED (MAX), (4" GLASS), (4" GUARD)

**HP1** - 12WLED (MAX), (3" GLASS), (3" GUARD)

**HP2** - 25WLED (MAX), (4" GLASS), (4" GUARD)

## B - FINISH OPTIONS

(\*SEE NOTES FOR LIMITATIONS\*)

(SEE WEBSITE FOR SWATCH COLORS)

20, 21, 22, 23, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 59, 60, 61, 62, 63, 70, 71, 72, 73

## C - MOUNTING OPTIONS

\* CORD & STEM MOUNTS ONLY.  
NO OTHER MOUNTING APPLIES

### LED CORD MOUNT

LBLC, LWHC, LTCB, LTCW, LTCHB, LTCHW, LTLB, LTLW, LTLB, LTLW, LRCB, LRCW, LRCHB, LRCHW, LFHB, LFHW, LHBLC, LHWCHC, LCBLC, LCWHC, LCHB, LCHW

### STEM MOUNT

ST6, ST12, ST18, ST24, ST36, ST48, STXX

## D - MOUNTING ADD-ONS

### LED ADD-ONS

LWTM, LSLC, LSTC

### UNIVERSAL ADD-ONS

FH 1/2", FH 3/4", LGSWL

## E - MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

## F - LIGHT SOURCE

(SEE PAGE 3 FOR WATTAGE LIMITATIONS)

### LIGHT EMITTED DIODE (LED)

10W, 12W, 25W

\*NOTE - MAX WATTAGE IS LISTED NEXT TO THE SHADE MODEL NUMBER IN SECTION "A". ALL WATTAGES BELOW THAT ARE ALSO AVAILABLE FOR THE SAME MODEL NUMBER.

## G - LED COLOR TEMP

**27K** - 2700 KELVIN

**3K** - 3000 KELVIN

**35K** - 3500 KELVIN

**4K** - 4000 KELVIN

**5K** - 5000 KELVIN

## H - ELECTRICAL OPTION

(SEE PAGE 3 FOR DIMMING OPTION SPECIFICATIONS)

**LDM120**

**LDM0-10**

## I - GLASS OPTIONS

### 3" GLASS (AVAILABLE FOR P1 & HP1)

CL3, CLT3, BL3, RE3, GR3, AH3, FR3, FRT3, PR3

### 4" GLASS (AVAILABLE FOR P2 & HP2)

CL4, CLT4, BL4, RE4, GR4, AH4, FR4, FRT4, PR4

## J - ACCESSORIES

### 3" GUARDS (AVAILABLE FOR P1 & HP1)

CG1, WG1

### 4" GUARDS (AVAILABLE FOR P2 & HP2)

CG2, WG2

## K - ACCESSORY COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

## NOTES

**(1)**. FINISH OPTIONS 40, 49, 54, 61, 62, 63, 70, 71, 72, 73 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.

**(2)**. FINISH OPTIONS FOR SHADES  $\leq$  10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES  $>$  10" IN DIAMETER ARE WHITE ON THE INSIDE.

**(3)**. FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.

\*ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).

\*ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE.


(EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).

\*ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.

\*FIXTURE DIMENSIONS MAY VARY  $\pm$  0.25.

\*CORD AND CANOPY COME IN THE SAME COLOR.

\*RATED FOR WET LOCATION.




**P1** H - 9.625" W - 4"

**P2** H - 12" W - 5.5"

3" GLASS & 3" GUARD AVAILABLE FOR P1

4" GLASS & 4" GUARD AVAILABLE FOR P2



**HP1** H - 9.625" W - 8"

**HP2** H - 12" W - 10"

3" GLASS & 3" GUARD AVAILABLE FOR HP1

4" GLASS & 4" GUARD AVAILABLE FOR HP2



## BASELITE VAPOR JAR CATALOG

PROJECT NAME: \_\_\_\_\_  
PROJECT TYPE: \_\_\_\_\_

### C - MOUNTING OPTIONS

#### STEM MOUNTS

\*STEMS RATED FOR DAMP LOCATION



#### ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM  
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)

\*CANOPY NOT INCLUDED, ADD IN SECTION D

\* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST

#### LED CORD MOUNTS


\*FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.

\*CORDS RATED FOR DRY LOCATION

\*CANOPY DIMENSIONS: 4" (H) 5.5" (W) \*CORD AND CANOPY COME IN THE SAME COLOR.



**LBLC** 8' BLACK CORD  
**LWCH** 8' WHITE CORD



**LTCB** 8' BLACK CORD, CABLE, and LOOP  
**LTCW** 8' WHITE CORD, CABLE, and LOOP



**LTCHB** 8' BLACK CORD, 3' CHAIN, and LOOP  
**LTCHW** 8' WHITE CORD, 3' CHAIN, and LOOP




**LTLB** 8' BLACK TELEPHONE CORD AND CABLE  
**LTLW** 8' WHITE TELEPHONE CORD AND CABLE  
\* Not available with compact fluorescent



**LRCB** 8' BLACK CORD, CABLE, and LOOP  
**LRCW** 8' WHITE CORD, CABLE, and LOOP



**LRCHB** 8' BLACK CORD, 3' CHAIN, and LOOP  
**LRCHW** 8' WHITE CORD, 3' CHAIN, and LOOP



#### NOTES:

\*DISTANCE TO LAMP (CF) 10'

\*All compact fluorescent and LED housings may vary in size according to light source chosen.



**LFHB** 8' BLACK CORD WITH FLAT HUB  
**LFHW** 8' WHITE CORD WITH FLAT HUB



**LCBLC** 8' BLACK CORD and CABLE  
**LCWHC** 8' WHITE CORD and CABLE




**LCHB** 8' BLACK CORD, 3' CHAIN, and LOOP  
**LCHW** 8' WHITE CORD, 3' CHAIN, and LOOP

\* Loop may vary due to shade style


### D - MOUNTING ADD-ONS

#### LED - STEM AND ARM ADD-ONS


\* FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



**LWTM** WEATHERTIGHT LED WALL MOUNT



**LSLC** LED SLOPE CEILING CANOPY



**LSTC** LED STEM MOUNT CANOPY




## D – MOUNTING ADD-ONS (CONTINUED)

## UNIVERSAL STEM AND ARM ADD-ONS

\* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:

MODEL #: -/-/-/-LWTM, TRB 1/2", LGSWL/-/-/-/-/-  
 A B C D E F G H I J K

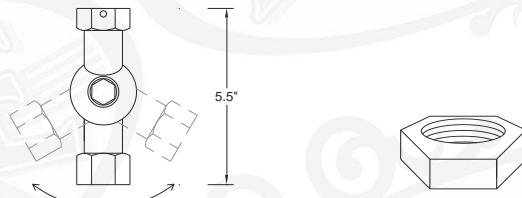

**LGSWL** 1/2" NPT SWIVEL  
 For all shades greater than  
 7" wide in diameter

**FH 1/2"** FLAT HUB 1/2"  
**FH 3/4"** FLAT HUB 3/4"

## F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

## LIGHT EMITTING DIODE (LED)

**LED 12W (MAX)** - P1, HP1  
**LED 25W (MAX)** - P2, HP2

**\*IMPORTANT** – FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE MAX WATTAGE AVAILABILITY. **EXAMPLE: / LED25W /**

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
LED10W	10W	1280	>90	120-277 VAC	See section "H"
LED12W	12W	1481	>90	120-277 VAC	See section "H"
LED25W	25W	2812	>90	120-277 VAC	See section "H"

## H – ELECTRICAL OPTION

BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES, SO RESTRICTIONS APPLY DUE TO THE SIZE OF THE DRIVER AND FIXTURE. PLEASE SEE INFORMATION BELOW AND FOR FURTHER DETAILS CONTACT THE FACTORY.

## LED DIMMING OPTIONS

FOR TRIAC OR 0-10V OPTOIN CHOOSE FROM ONE OF THE FOLLOWING OPTIONS BELOW. CONTACT DRIVER MANUFACTURER FOR SPECIFICATIONS.

**LDM120** - TRIAC DIMMING AT 120 VOLT  
**LDM277** - TRIAC DIMMING AT 277 VOLT  
**LDM0-10V** - 0 – 10v



## BASELITE VAPOR JAR CATALOG

PROJECT NAME: \_\_\_\_\_  
PROJECT TYPE: \_\_\_\_\_

### I – GLASS OPTIONS

\*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.  
\*3" GLASS AVAILABLE FOR P1 & HP1      \*4" GLASS AVAILABLE FOR P2 & HP2



**CL3** 3" CLEAR GLASS

**CL4** 4" CLEAR GLASS

**CLT3** 3" CLEAR TEMPERED

**CLT4** 4" CLEAR TEMPERED



**PR3** 3" PRISMATIC GLASS

**PR4** 4" PRISMATIC GLASS



**RE3** 3" RED GLASS

**RE4** 4" RED GLASS



**BL3** 3" BLUE GLASS

**BL4** 4" BLUE GLASS



**FR3** 3" FROSTED GLASS

**FR4** 4" FROSTED GLASS

**FRT3** 3" FROSTED TEMPERED

**FRT4** 4" FROSTED TEMPERED



**AH3** 3" AMBER HYDE GLASS


**AH4** 4" AMBER HYDE GLASS



**GR3** 3" GREEN GLASS

**GR4** 4" GREEN GLASS

GLASS – DIMENSIONS		
3" GLASS	Diameter	3.34"
	Height	6.93"
	Fitter	3.29"
4" GLASS	Diameter	4.34"
	Height	8.37"
	Fitter	4.29"




GLASS – MAX WATTAGE  
3" GLASS – 100W INC / LED12W  
4" GLASS – 200W INC / LED25W


### J – ACCESSORIES

\* 3" GUARDS AVAILABLE FOR P1 & HP1


\* 4" GUARDS AVAILABLE FOR P2 & HP2




**WG1** 3" WIRE GUARD



**WG2** 4" WIRE GUARD



**CG1** 3" CAST GUARD



**CG2** 4" CAST GUARD