



BASELITE – WCG – LED – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	/	X	/
EXAMPLE:	A	B	C	D	E	F	G	H	I	J	K	
	WCG12	41	E16	CB ½"	43	45W	3K	LDM120	PR3	-	44	

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



WCG14/74/ST18/STC/74/100INC/PR3

A - SHADES

WCG SERIES

- WCG12** - 12WLED (MAX), (3" GLASS), (3" GUARD)
- WCG14** - 12WLED (MAX), (3" GLASS), (3" GUARD)
- WCG16** - 12WLED (MAX), (3" GLASS), (3" GUARD)
- WCG20** - 12WLED (MAX), (3" GLASS), (3" GUARD)
- WCG24** - 25WLED (MAX), (4" GLASS), (4" GUARD)

B - FINISH OPTIONS

(*SEE NOTES FOR LIMITATIONS*)
 (SEE WEBSITE FOR SWATCH COLORS)
 20, 21, 22, 23, 40, 41, 41.5, 42, 43, 44, 45,
 46, 48, 49, 50, 51, 52, 53, 54, 55, 59, 60, 61,
 62, 63, 70, 71, 72, 73

C – MOUNTING OPTIONS

- ½" ARM EXTENSIONS**
E1, E3, E4, B1, E16, E17
- ¾" ARM EXTENSIONS**
E3A, E4A, E5, E6, E7, E8, E9,
E10, E11, E12, E13, B15, B15S,
E19, E20, E21, E25
- E14 - CREATE YOUR OWN**
(BASELITE WILL TAKE YOUR SKETCH AND
FABRICATE A CUSTOM ARM EXTENSION TO
MEET YOUR NEEDS).
- LED CORD MOUNT**
LBLC, LWHC, LTCB, LTCW, LTCHB, LTCHW,
LTLB, LTLW, LTLB, LTLW, LRCB, LRCW,
LRCHB, LRCHW, LFHB, LFHW, LHBLC,
LHWHC, LCBLC, LCWHC, LCHB, LCHW
- STEM MOUNT**
DP24, ST6, ST12, ST18, ST24, ST36, ST48,
STXX

D – MOUNTING ADD-ONS

- LED ADD-ONS**
LWTM, LSLC, LSTC
- UNIVERSAL ADD-ONS**
FH ½", FH ¾", LGSWL

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)
LIGHT EMITTED DIODE (LED)
 10W, 12W, 25W

*NOTE – MAX WATTAGE IS LISTED NEXT TO THE
 SHADE MODEL NUMBER IN SECTION "A". ALL
 WATTAGES BELOW THAT ARE ALSO AVAILABLE FOR
 THE SAME MODEL NUMBER.

G – LED COLOR TEMP

- 27K** – 2700 KELVIN
- 3K** – 3000 KELVIN
- 35K** – 3500 KELVIN
- 4K** – 4000 KELVIN
- 5K** – 5000 KELVIN

H – ELECTRICAL OPTION

(SEE PAGE 4 FOR DIMMING OPTION SPECIFICATIONS)
LDM120
LDM0-10

I – GLASS OPTIONS

- 3" GLASS** (AVAILABLE FOR E1 & HE1)
CL3, CLT3, BL3, RE3, GR3,
AH3, FR3, FRT3, PR3
- 4" GLASS** (AVAILABLE FOR E2 & HE2)
CL4, CLT4, BL4, RE4, GR4,
AH4, FR4, FRT4, PR4

J – ACCESSORIES


NOT AVAILABLE

K – ACCESSORY COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

NOTES

- FINISH OPTIONS 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
- FINISH OPTIONS 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- FINISH OPTIONS FOR SHADES ≤ 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES > 10" IN DIAMETER ARE WHITE ON THE INSIDE.
- FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
 *ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
 *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER).
 *ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.




WCG12	H - 9.625"	W - 12"
WCG14	H - 10"	W - 14"
WCG16	H - 10.5"	W - 16"
WCG20	H - 10.875"	W - 20"
WCG24	H - 12"	W - 24"



C - MOUNTING OPTIONS


1/2" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

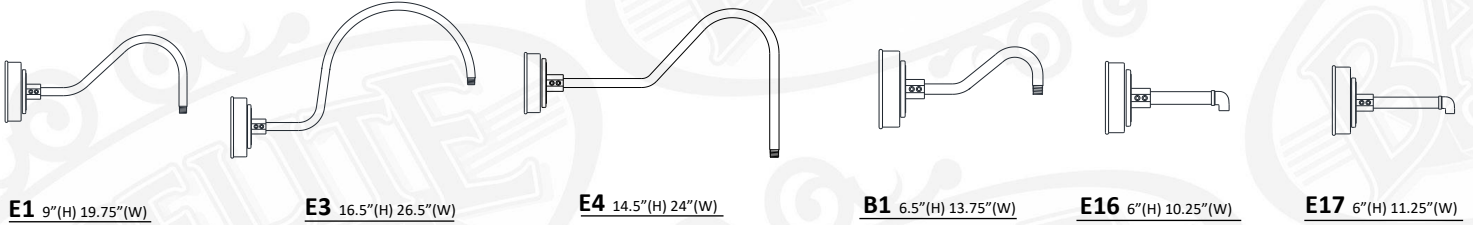


3/4" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

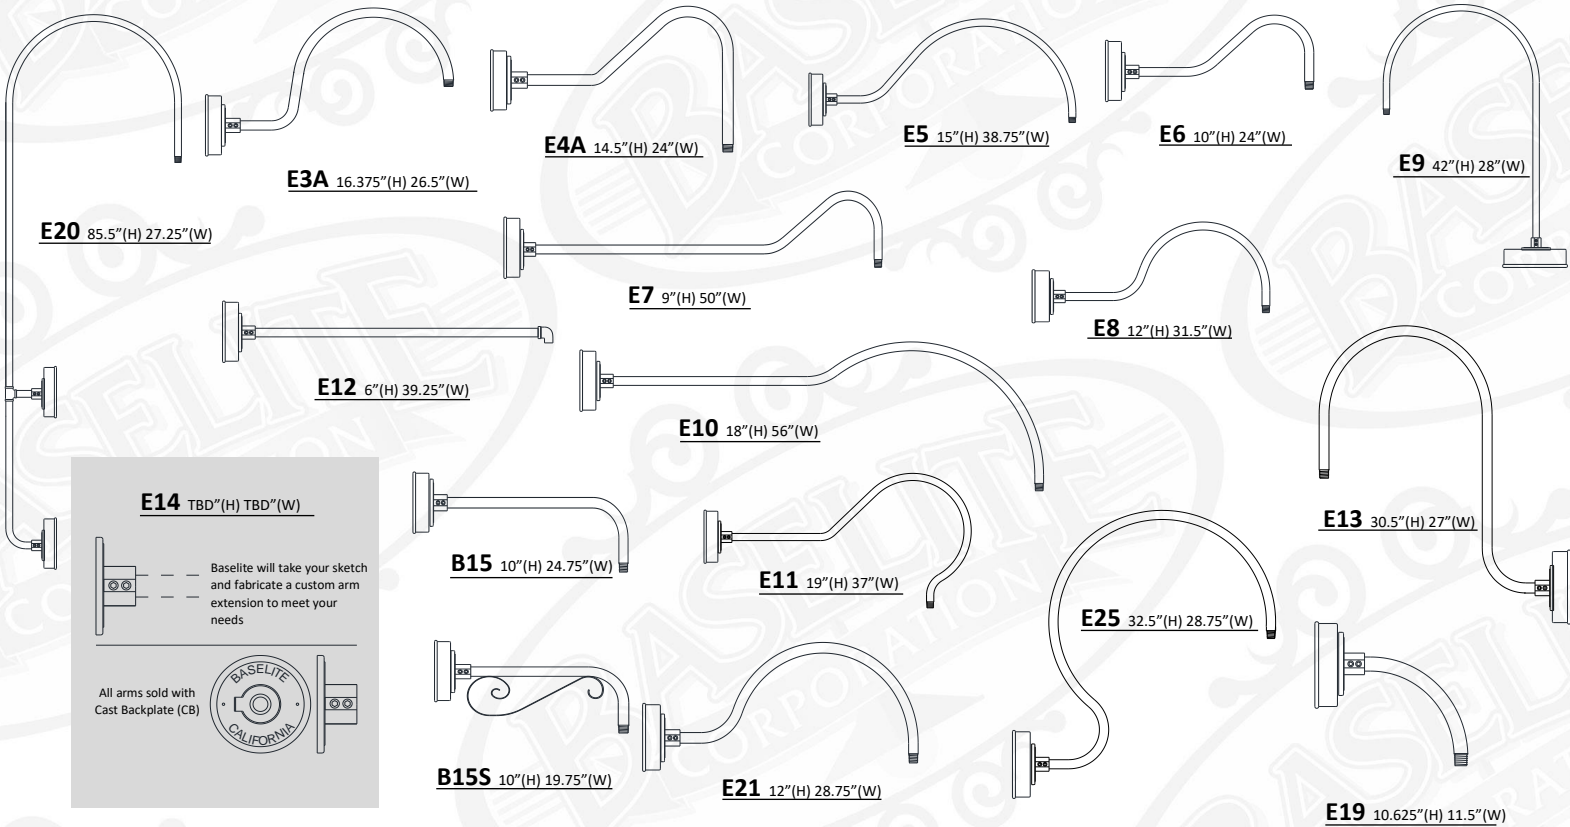

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

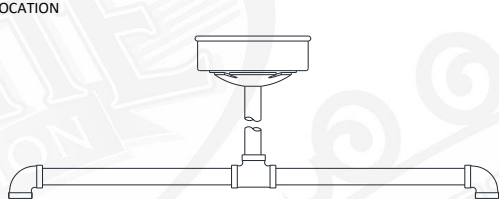

DP24 DOUBLE PENDANT 20"(H) 24"(W)

*DP24 COMES STANDARD WITH LSTC AND ST18



ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)

*CANOPY NOT INCLUDED, ADD IN SECTION D









* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST



C - MOUNTING OPTIONS (CONTINUED)

LED CORD MOUNTS


*FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY. *CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: 4" (H) 5.5" (W) *CORD AND CANOPY COME IN THE SAME COLOR.

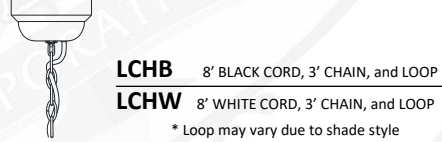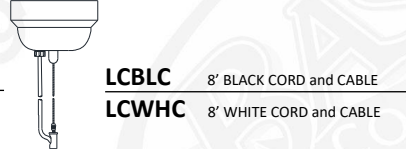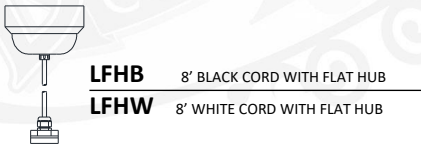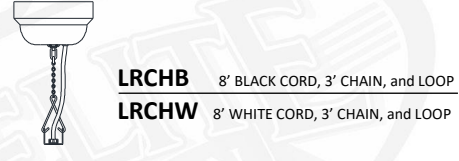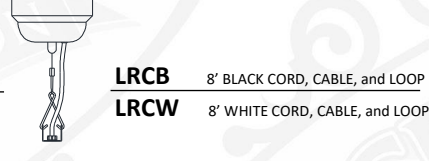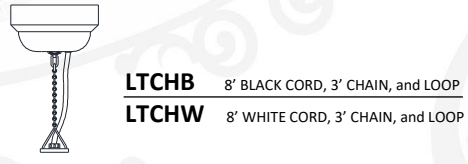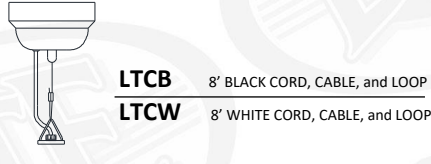


NOTES:
*DISTANCE TO LAMP (CF) 10"
*All compact fluorescent and LED housings may vary in size according to light source chosen.

LED - STEM AND ARM ADD-ONS


* FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



LWTM WEATHERTIGHT LED WALL MOUNT



LSLC LED SLOPE CEILING CANOPY




LSTC LED STEM MOUNT CANOPY


UNIVERSAL STEM AND ARM ADD-ONS

* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:

MODEL #: -/-/LWTM, TRB 1/2", LGSWL/-/-/-/-/-/
A B C D E F G H I J K



LGSWL 1/2" NPT SWIVEL
For all shades greater than 7" wide in diameter



FH 1/2" FLAT HUB 1/2"
FH 3/4" FLAT HUB 3/4"



F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

LIGHT EMITTING DIODE (LED)

LED 12W (MAX) - WCG12, WCG14, WCG16, WCG20
LED 25W (MAX) - WCG24

***IMPORTANT** – FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE MAX WATTAGE AVAILABILITY. **EXAMPLE:** /LED25W/

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
LED10WF	10W	1280	>90	120-277 VAC	TRI-ELV *120V ONLY
LED12W	12W	1481	>90	120-277 VAC	See section "H"
LED25W	25W	2812	>90	120-277 VAC	See section "H"
		@3500K			

H – ELECTRICAL OPTION

BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES, SO RESTRICTIONS APPLY DUE TO THE SIZE OF THE DRIVER AND FIXTURE. PLEASE SEE INFORMATION BELOW AND FOR FURTHER DETAILS CONTACT THE FACTORY.

LED DIMMING OPTIONS

(LED10WF – ONLY AVAILABLE WITH **LDM120** - TRI-ELV DIMMING OPITON) ALL OTHER WATTAGES CAN CHOOSE FROM THE OPTIONS BELOW. CONTACT DRIVER MANUFACTURER FOR FURTHER SPECIFICATIONS.

LDM120 - TRIAC / ELV – INPUT 120 / 277V - DIMMING AT 120 VOLT ONLY

LDM0-10V – 0 – 10V – DIMMING AT 120 / 277 VOLTS

I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.



CL3 3" CLEAR GLASS
CLT3 3" CLEAR TEMPERED



PR3 3" PRISMATIC GLASS



RE3 3" RED GLASS



BL3 3" BLUE GLASS



FR3 3" FROSTED GLASS
FRT3 3" FROSTED TEMPERED



AH3 3" AMBER HYDE GLASS



GR3 3" GREEN GLASS

GLASS – DIMENSIONS	
3" GLASS	
Diameter	3.34"
Height	6.93"
Fitter	3.29"

GLASS – MAX WATTAGE
3" GLASS – 100W INC / LED12W

