



BASELITE - REGENT – INC – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	/	/
EXAMPLE:	A RE12	B 41	C B10	D SQ ½"	E 43	F 25W	G 3K	H LDM120	I CL3	J GR12	K 44

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



RE12/49/FR/WM28/100INC

A - SHADES

- REGENT**
RE12 - 150WINC (MAX)
RE16 - 2000WINC (MAX)
RE18 - 2000WINC (MAX)
RE20 - 2000WINC (MAX)
REJ5FM - 150WINC (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)
 (*SEE NOTES FOR LIMITATIONS*)
 14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB,
 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40,
 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51,
 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64,
 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79,
 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91,
 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C – MOUNTING OPTIONS

- ½" ARM EXTENSIONS**
 E1, E2, E3, E4, B1, E16, E17, E27
- ¾" ARM EXTENSIONS**
 E3A, E4A, E5, E6, E7, E8, E9,
 E10, E11, E12, E13, B15, B15S,
 E19, E20, E21, E25
- E14 - CREATE YOUR OWN**
 (BASELITE WILL TAKE YOUR SKETCH AND
 FABRICATE A CUSTOM ARM EXTENSION TO
 MEET YOUR NEEDS).
- ¼" WALL MOUNT**
 WM28
- ½" WALL MOUNT**
 B13, WM13, WM13R, WM13X, B10,
 B11, B101
- ¾" WALL MOUNT**
 B9, B9C, B12, WM10, WM11, WM14,
 WM14X, WM15, WM35X, WM55,
 WM55X, WM60, WM60X, WM61,
 WM61X WM70, WM70X, WM71,
 WM71X
- CORD MOUNT**
 BLC, WHC, TCB, TCW, TCHB, TCHW, TLB,
 TLW, TLB, TLW, RCB, RCW, RCHB, RCHW,
 FHB, FHW, CBLC, CWHC, CHB, CHW
- STEM MOUNT**
 ST6, ST12, ST18, ST24, ST36, ST48, STXX

D – MOUNTING ADD-ONS

- INC ADD-ONS**
 CB1/2", CB3/4", CBC1/2", CBC3/4", SLC1/2"
 SLC3/4" STC1/2"
- UNIVERSAL ADD-ONS**
 SQ ½", SQ ¾", FH ½", FH ¾", TRB ½", TRB ¾",
 SWL, LGSWL, CNK, INB, RINB

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)
INCANDESCENT (INC)
 100W, 150W, 200W

G – LED COLOR TEMP

NOT AVAILABLE

H – ELECTRICAL OPTION

NOT AVAILABLE

I – GLASS OPTIONS

- CL3, CL4, CLT3, CLT4, BL3, BL4, RE3, RE4,
 GR3, GR4, AH3, AH4, FR3, FR4, FRT3, FRT4,
 PR3, PR4, BA, BAX, BAF, PR8, PR8F, FN, OC

J – ACCESSORIES


- GR12, GR16, GR18, GR20, REF, UGR, LGR12,
 LGR16, LGR18, LGR20, CRL12, CRL16, CRL18,
 CRL20, FLE12, FLE16, FLE18, FLE20, FGR12,
 FGR16, FGR18, FGR20, GU-1, GU-2, WG-1,
 WG-2

K – ACCESSORY COLOR


SEE SECTION "B" FOR COLOR OPTIONS.

NOTES

- (1). FINISH OPTIONS 75,76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
 - (2). FINISH OPTIONS 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
 - (3). FINISH OPTIONS FOR SHADES ≤ 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES > 10" IN DIAMETER ARE WHITE ON THE INSIDE.
 - (4). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
 - (5). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
- *ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
- *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).
- *ALL FIXTURES MOUNT TO A 4-0 JUNCTION BOX.
- *FIXTURE DIMENSIONS MAY VARY ± 0.25.
- *CORD AND CANOPY COME IN THE SAME COLOR.



- RE12** H-11" W-12"
RE16 H-15" W-16"
RE18 H-16" W-18"
RE20 H-17.5" W-20"



- REJ5FM** H-6" W-8"



C - MOUNTING OPTIONS

1/2" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED *E27 CUSTOM BACK PLATE - 8" (H) .5" (W)




E1 8.5"(H) 18"(W)



E2 13.5"(H) 35"(W)



E3 16"(H) 24.75"(W)



E4 14.5"(H) 22.25"(W)



B1 6"(H) 12"(W)



E16 4.75"(H) 8.5"(W)




E17 4.75"(H) 9.5"(W)



E27 10.25"(H) 10.5"(W)

3/4" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

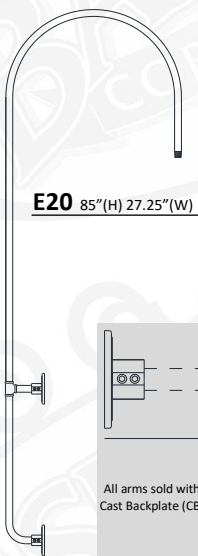


E20 85"(H) 27.25"(W)




E3A 16"(H) 24.75"(W)




E4A 14.5"(H) 22.25"(W)



E5 15"(H) 37"(W)




E6 9"(H) 22.25"(W)



E9 40.25"(H) 27.5"(W)



E12 4.75"(H) 37.5"(W)



E7 9"(H) 48.25"(W)




E8 12"(H) 29.75"(W)


Baselite will take your sketch and fabricate a custom arm extension to meet your needs

All arms sold with Cast Backplate (CB)


E14 TBD"(H) TBD"(W)




B15 9.5"(H) 23"(W)




E10 18"(H) 54.25"(W)



E11 19"(H) 35"(W)



E25 32"(H) 27"(W)

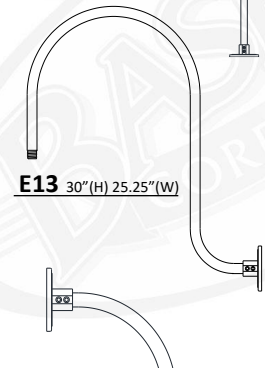

E13 30"(H) 25.25"(W)



B15S 9.5"(H) 18"(W)



E21 12"(H) 27"(W)



E19 10"(H) 10"(W)

1/4" WALL MOUNT

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



WM28 13"(H) 10"(W)

1/2" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



B10 4.75"(H) 11"(W)



B101 4.75"(H) 12"(W)




B11 4.75"(H) 13"(W)



B13 4.75"(H) 15"(W)



WM13 12"(H) 9.5"(W)



WM13R 12"(H) 9.5"(W)



WM13X 12"(H) 10.5"(W)



C - MOUNTING OPTIONS (CONTINUED)

3/4" WALL MOUNTS


*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED




B12 4.75"(H) 14"(W)




B9 5"(H) 18"(W)



B9C 5"(H) 18"(W)
*CHAIN HEIGHT TBD BY CUSTOMER



WM14 18"(H) 12"(W)



WM14X 18"(H) 14"(W)



WM15 23"(H) 19.5"(W)



WM18 30"(H) 20"(W)



WM35 26"(H) 18.25"(W)




WM35X 26"(H) 22"(W)




WM55 19"(H) 25.5"(W)



WM55X 19"(H) 27"(W)




WM60 18"(H) 20"(W)




WM60X 18"(H) 22"(W)




WM61 18"(H) 20"(W)




WM61X 18"(H) 22"(W)




WM70 18"(H) 20"(W)



WM70X 18"(H) 22"(W)




WM71 18"(H) 20"(W)



WM71X 18"(H) 22"(W)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION



DP24 DOUBLE PENDANT 20"(H) 24"(W)

*DP24 COMES STANDARD WITH STC AND ST18



ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D
* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST



SC24 SCROLL STEM 33"(H) 24"(W)


*SC24 COMES STANDARD WITH STC

INCANDESCENT CORD MOUNTS

*INCANDESCENT MAX WATTAGE 150 WATT. CALL FACTORY FOR HIGHER WATTAGES. LOOPS, CABLES, AND CHAINS AVAILABLE ONLY FOR INCANDESCENT *CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: .625" (H) 5.25" (W)
*CORD AND CANOPY COME IN THE SAME COLOR.



BLC 8' BLACK CORD
WHC 8' WHITE CORD



TCB 8' BLACK CORD, CABLE, and LOOP
TCW 8' WHITE CORD, CABLE, and LOOP



TCHB 8' BLACK CORD, 3' CHAIN, and LOOP
TCHW 8' WHITE CORD, 3' CHAIN, and LOOP

I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.



CL3 3" CLEAR GLASS

CL4 4" CLEAR GLASS

CLT3 3" CLEAR TEMPERED

CLT4 4" CLEAR TEMPERED



PR3 3" PRISMATIC GLASS

PR4 4" PRISMATIC GLASS



RE3 3" RED GLASS

RE4 4" RED GLASS



BL3 3" BLUE GLASS

BL4 4" BLUE GLASS



FR3 3" FROSTED GLASS

FR4 4" FROSTED GLASS

FRT3 3" FROSTED TEMPERED

FRT4 4" FROSTED TEMPERED




AH3 3" AMBER HYDE GLASS

AH4 4" AMBER HYDE GLASS



GR3 3" GREEN GLASS

GR4 4" GREEN GLASS



GLASS – DIMENSIONS	
3" GLASS	
Diameter	3.34"
Height	6.93"
Fitter	3.29"
4" GLASS	
Diameter	4.34"
Height	8.37"
Fitter	4.29"

GLASS – MAX WATTAGE	
3" GLASS	100W INC / LED12W
4" GLASS	200W INC / LED25W



BA 6" OPAL BALL
(100W INC MAX/LED12W)



BAX 9" CLEAR GLOBE
BAF 9" FROSTED GLOBE
(200W INC MAX/LED25W)



FN 8" CLEAR TEXTURED GLOBE
(150W INC MAX/LED25W)



BA7 7" CLEAR GLOBE

BA7F 7" FROSTED GLOBE
(100W INC MAX/LED25W)




PR8 8" PRISMATIC

PR8F 8" PRISMATIC FROSTED
(200W INC MAX/LED45W)



OC 8" OPAL TAPERED GLOBE
(60W INC MAX/LED25W)

J – ACCESSORIES



GR12 12" WIRE GRILL

GR16 16" WIRE GRILL

GR18 18" WIRE GRILL

GR20 20" WIRE GRILL




LGR12 12" LOUVERED GRILL

LGR16 16" LOUVERED GRILL

LGR18 18" LOUVERED GRILL

LGR20 20" LOUVERED GRILL



FGR12 12" FLAT GRILL

FGR16 16" FLAT GRILL

FGR18 18" FLAT GRILL

FGR20 20" FLAT GRILL




CRL12 12" CURVED POLYCARB LENS

CRL16 16" CURVED POLYCARB LENS

CRL18 18" CURVED POLYCARB LENS

CRL20 20" CURVED POLYCARB LENS




FLE12 12" FLAT CLEAR LENS

FLE16 16" FLAT CLEAR LENS

FLE18 18" FLAT CLEAR LENS


FLE20 20" FLAT CLEAR LENS




REF 9.5" DIAMETER REFRACTOR




UGR U- WIRE GUARD




WG-1 WIRE GUARD



WG-2 WIRE GUARD



GU-1 CAST ALUMINUM GUARD



GU-2 CAST ALUMINUM GUARD