



BASELITE – VENTED SHADE – CF – SPEC SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	/	/	/
	A	B	C	D	E	F	G	H	I	J	K	
EXAMPLE:	V212	41	E16	SQ ½"	43	12W	3K	LDM120	PR3	GR12	44	

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



A - SHADES

VENTED SHADES

- V212**- 32WCF (MAX)
- V214**- 42WCF (MAX)
- V216**- 42WCF (MAX)
- V218**- 42WCF (MAX)
- V220**- 42WCF (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)

(*SEE NOTES FOR LIMITATIONS*)

14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB, 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C – MOUNTING OPTIONS

½" ARM EXTENSIONS

E1, E2, E3, E4, B1, E16, E17, E18, E26, E27

¾" ARM EXTENSIONS

E3A, E4A, E5, E6, E7, E8, E9, E10, E11, E12, E13, B15, B15S, E19, E20, E21, E25

E14 - CREATE YOUR OWN

(BASELITE WILL TAKE YOUR SKETCH AND FABRICATE A CUSTOM ARM EXTENSION TO MEET YOUR NEEDS).

½" WALL MOUNT

B13, WM13R, WM13X, B10, B11, B101

¾" WALL MOUNT

B9, B9C, B12, WM10, WM11, WM14X, WM15, WM35X, WM55X, WM60X, WM61X WM70X, WM71X

COMPACT FLUORESCENT CORD MOUNT

CFBLC, CFWHC, CFTCB, CFTCW, CFTCHB, CFTCHW, CFTLB, CFTLW, CFRCB, CFRCW, CFRCHB, CFRCHW, CFFHB, CFFHW, CFHBL, CFHWHC, CFCBLC, CFCWHC, CFCCHB, CFCCHW

STEM MOUNT

ST6, ST12, ST18, ST24, ST36, ST48, STXX

D – MOUNTING ADD-ONS

CF ADD-ONS

CFWTM, CFSLC, CFSTC

UNIVERSAL ADD-ONS

SQ ½", SQ ¾", FH ½", FH ¾", TRB ½", TRB ¾", SWL, LGSWL, CNK, INB, RINB

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)

COMPACT FLUORESCENT (CF)

26W, 32W, 42W

G – LED COLOR TEMP

NOT AVAILABLE

H – ELECTRICAL OPTION

(SEE PAGE 4 FOR DIMMING OPTION SPECIFICATIONS)

CDM120

CDM277

CDM120/277

I – GLASS OPTIONS

CL3, CL4, CLT3, CLT4, BL3, BL4, RE3, RE4, GR3, GR4, AH3, AH4, FR3, FR4, FRT3, FRT4, PR3, PR4, BA, BAX, BAF, PR8, PR8F, FN, OC

J – ACCESSORIES


GR12, GR14, GR16, GR18, GR20, REF, UGR, LGR12, LGR14, LGR16, LGR18, LGR20, CRL12, CRL14, CRL16, CRL18, CRL20, FLE12, FLE14, FLE16, FLE18, FLE20, FGR12, FGR14, FGR16, FGR18, FGR20, GU-1, GU-2, WG-1, WG-2

K – ACCESSORY COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

NOTES

- (1). FINISH OPTIONS 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
 - (2). FINISH OPTIONS 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
 - (3). FINISH OPTIONS FOR SHADES ≤ 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES > 10" IN DIAMETER ARE WHITE ON THE INSIDE.
 - (4). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
 - (5). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
- *ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
- *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).
- *ALL FIXTURES MOUNT TO A 4-0 JUNCTION BOX.
- *FIXTURE DIMENSIONS MAY VARY ± 0.25.
- *SHADES RATED FOR DRY LOCATION ONLY.
- *CORD AND CANOPY COME IN THE SAME COLOR.




V212	H-8"	W-12"
V214	H-9"	W-14"
V216	H-9"	W-16"
V218	H-10"	W-18"
V220	H-10"	W-20"



C - MOUNTING OPTIONS


1/2" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

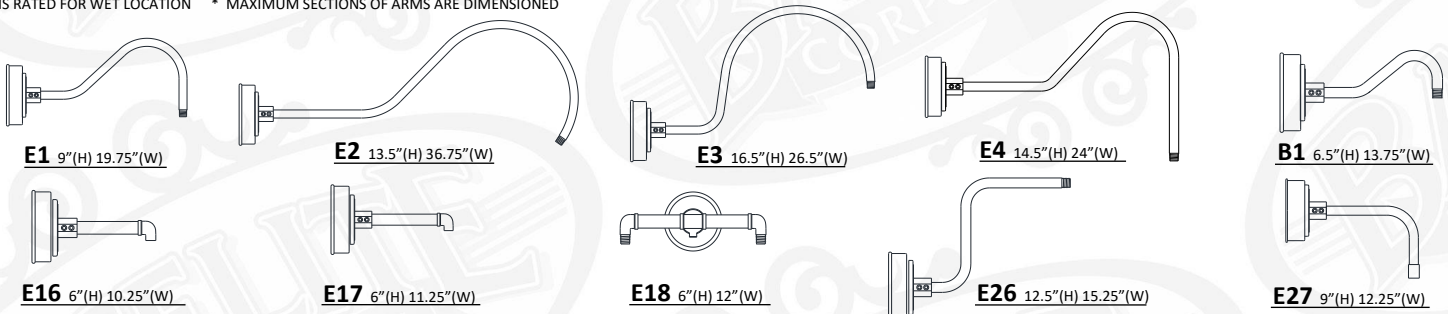


3/4" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

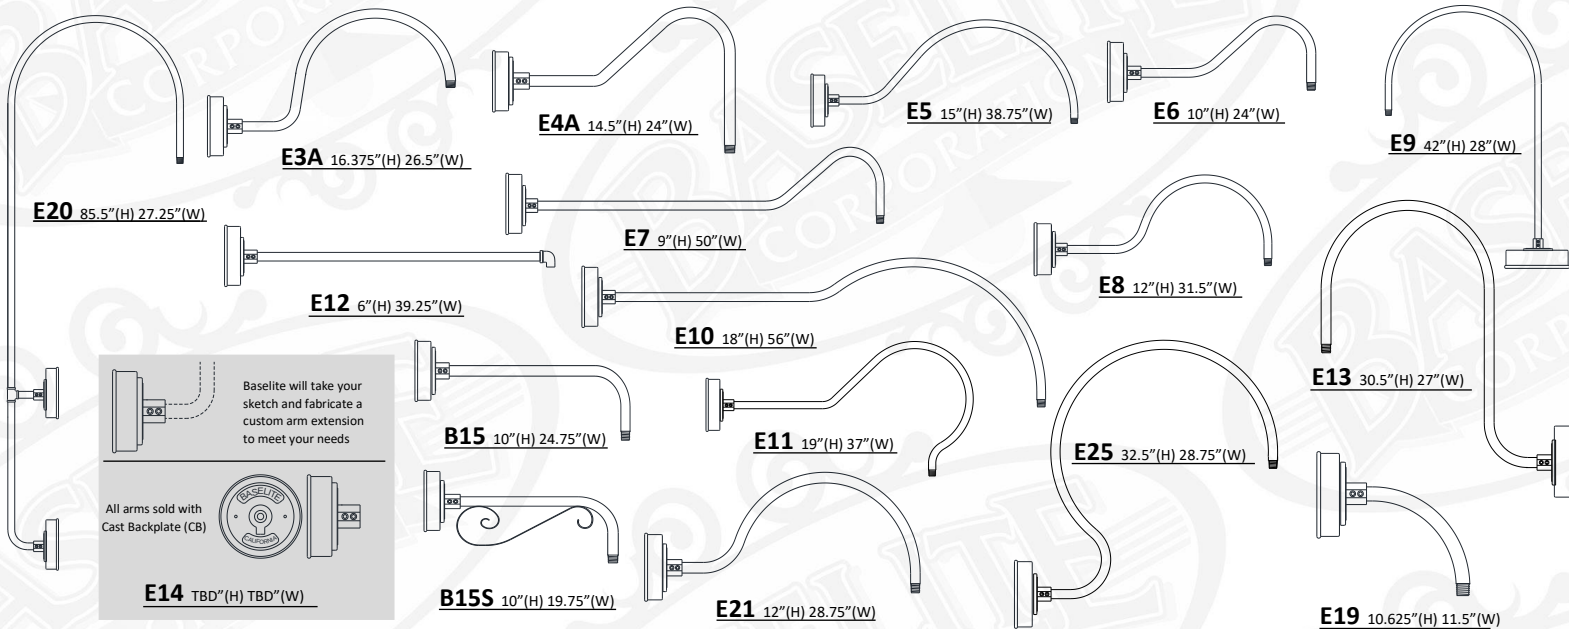


1/2" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED

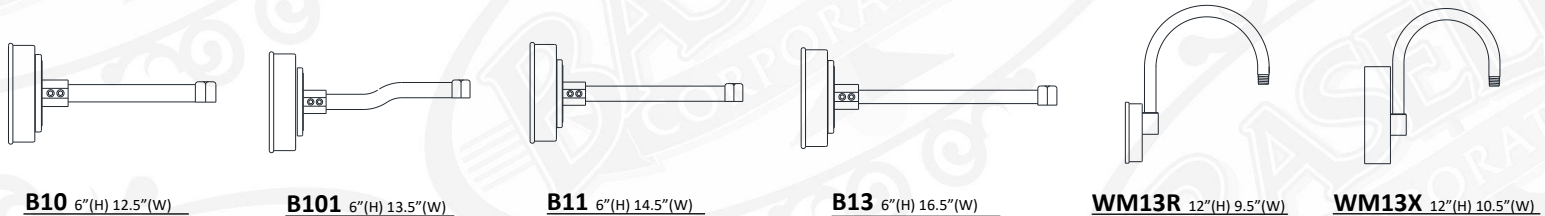

3/4" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED




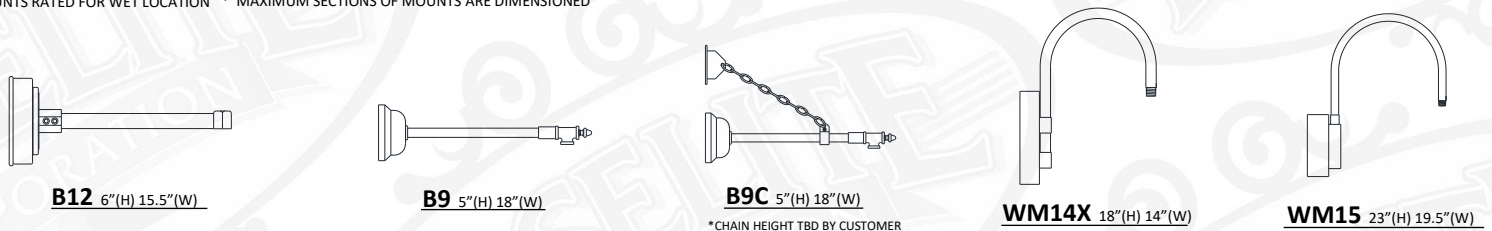




C - MOUNTING OPTIONS (CONTINUED)


3/4" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED

**WM35X** 26"(H) 22"(W)**WM55X** 19"(H) 27"(W)**WM60X** 18"(H) 22"(W)**WM61X** 18"(H) 22"(W)**WM70X** 18"(H) 22"(W)**WM71X** 18"(H) 22"(W)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

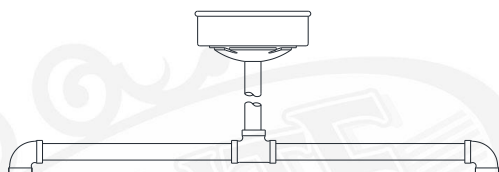**DP24** DOUBLE PENDANT 20"(H) 24"(W)

*DP24 COMES STANDARD WITH CFSTC AND ST18

**ST(XX)** STEM- 1/2" NPT

XX = LENGTH OF STEM

(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)

*CANOPY NOT INCLUDED, ADD IN SECTION D

* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST


**SC24** SCROLL STEM 33"(H) 26"(W)

*SC24 COMES STANDARD WITH CFSTC

COMPACT FLUORESCENT CORD MOUNTS

*FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY. *CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: 4" (H) 5.5" (W)
*CORD AND CANOPY COME IN THE SAME COLOR.**CFBLC** 8' BLACK CORD**CFWHC** 8' WHITE CORD**CFTCB** 8' BLACK CORD, CABLE, and LOOP**CFTCW** 8' WHITE CORD, CABLE, and LOOP**CFTCHB** 8' BLACK CORD, 3' CHAIN, and LOOP**CFTCHW** 8' WHITE CORD, 3' CHAIN, and LOOP**CFRCHB** 8' BLACK CORD, CABLE, and LOOP**CFRCW** 8' WHITE CORD, CABLE, and LOOP**CFRCHB** 8' BLACK CORD, 3' CHAIN, and LOOP**CFRCHW** 8' WHITE CORD, 3' CHAIN, and LOOP**CFCHB** 8' BLACK CORD, 3' CHAIN, and LOOP**CFCHW** 8' WHITE CORD, 3' CHAIN, and LOOP

* Loop may vary due to shade style

**CFFHB** 8' BLACK CORD WITH FLAT HUB**CFFHW** 8' WHITE CORD WITH FLAT HUB**CFCBLC** 8' BLACK CORD and CABLE**CFCWHC** 8' WHITE CORD and CABLE**NOTES:**

*DISTANCE TO LAMP (CF) 10'




*All compact fluorescent and LED housings may vary in size according to light source chosen.



D - MOUNTING ADD-ONS

COMPACT FLUORESCENT STEM AND ARM ADD-ONS

* FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.




**CFWTM** WEATHERTIGHT CF WALL MOUNT**CFSLC** CF SLOPE CEILING CANOPY**CFSTC** CF STEM MOUNT CANOPY

UNIVERSAL STEM AND ARM ADD-ONS

* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:

MODEL #: -/-/-/WTM, TRB 1/2", LGSWL/-/-/-/-/-/
A B C D E F G H I J K**CNK** CANOPY For MULTIPLE FIXTURES

*CNK dimensions vary on number of fixtures applied

**LGSWL** 1/2" NPT SWIVEL
For all shades greater than 7" wide in diameter**FH 1/2"** FLAT HUB 1/2"
FH 3/4" FLAT HUB 3/4"**TRB 1/2"-4' Cable** SUPPORT
TRB 3/4"-4' Cable SUPPORT

F – LIGHT SOURCE

COMPACT FLUORESCENT (CF)

CF 26W, 32W(MAX) - V212
CF 26W, 32W, OR 42W(MAX) - V214, V216, V218, V220

*IMPORTANT – FOR COMPACT FLUORESCENT (CF) LIGHT SOURCE, FIXTURES ARE LIMITED DUE TO THE SIZE OF THE SHADE. PLEASE SEE THE CHART TO THE LEFT TO SEE WHAT WATTAGE IS COMPARABLE FOR EACH FIXTURE WHEN ORDERING.

EXAMPLE: / CF42W /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
CF26W	26W	PER BULB SPECS	>90	120-277 VAC	See section "H"
CF32W	32W	PER BULB SPECS	>90	120-277 VAC	See section "H"
CF42W	42W	PER BULB SPECS	>90	120-277 VAC	See section "H"

H – ELECTRICAL OPTION

MOST BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES. PLEASE SEE NOTES BELOW AND FOR FURTHER DETAILS CONTACT THE FACTORY. FOR DIMMING BALLAST OPTION, PLEASE CHOOSE MARK X OR MARK VII, SO RESTRICTIONS APPLY DUE TO THE SIZE OF THE BALLAST AND FIXTURE.

COMPACT FLUORESCENT DIMMING OPTIONS

PROVIDED WITH ADVANCE TRANSFORMER, PLEASE CHOOSE MARK 10 OR MARK 7 WITH SPECIFIED VOLTAGE FROM THE LIST BELOW. CONTACT BALLAST MANUFACTURER FOR SPECIFICATIONS.

CDM7-120/277 - ADVANCE MARK 7 0-10v ELECTRICAL BALLST – 120/277 VOLT**CDM10-120** - ADVANCE MARK 10 ELECTRICAL BALLST – 120 VOLT**CDM10-277** - ADVANCE MARK 10 ELECTRICAL BALLST – 277 VOLT



BASELITE RLM CATALOG

PROJECT NAME: _____
PROJECT TYPE: _____

I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.



CL3 3" CLEAR GLASS



PR3 3" PRISMATIC GLASS



RE3 3" RED GLASS



BL3 3" BLUE GLASS

CL4 4" CLEAR GLASS

PR4 4" PRISMATIC GLASS

RE4 4" RED GLASS

BL4 4" BLUE GLASS

CLT3 3" CLEAR TEMPERED

CLT4 4" CLEAR TEMPERED



FR3 3" FROSTED GLASS



AH3 3" AMBER HYDE GLASS



GR3 3" GREEN GLASS


FR4 4" FROSTED GLASS

AH4 4" AMBER HYDE GLASS

GR4 4" GREEN GLASS

FRT3 3" FROSTED TEMPERED

FRT4 4" FROSTED TEMPERED



GLASS – DIMENSIONS

3" GLASS
Diameter 3.34"
Height 6.93"
Fitter 3.29"

4" GLASS
Diameter 4.34"
Height 8.37"
Fitter 4.29"

GLASS – MAX WATTAGE
3" GLASS – 100W INC / LED12W
4" GLASS – 200W INC / LED25W



BA 6" OPAL BALL
(100W INC MAX/LED12W)



BAX 9" CLEAR GLOBE
BAF 9" FROSTED GLOBE
(200W INC MAX/LED25W)



FN 8" CLEAR TEXTURED GLOBE
(150W INC MAX/LED25W)



BA7 7" CLEAR GLOBE



PR8 8" PRISMATIC




OC 8" OPAL TAPERED GLOBE
(60W INC MAX/LED25W)

BA7F 7" FROSTED GLOBE
(100W INC MAX/LED25W)

PR8F 8" PRISMATIC FROSTED
(200W INC MAX/LED45W)

J – ACCESSORIES




GR12 12" WIRE GRILL

GR14 14" WIRE GRILL

GR16 16" WIRE GRILL

GR18 18" WIRE GRILL

GR20 20" WIRE GRILL




LGR12 12" LOUVERED GRILL

LGR14 14" LOUVERED GRILL

LGR16 16" LOUVERED GRILL

LGR18 18" LOUVERED GRILL

LGR20 20" LOUVERED GRILL



FGR12 12" FLAT GRILL

FGR14 14" FLAT GRILL

FGR16 16" FLAT GRILL

FGR18 18" FLAT GRILL

FGR20 20" FLAT GRILL




CRL12 12" CURVED POLYCARB LENSE

CRL14 14" CURVED POLYCARB LENSE

CRL16 16" CURVED POLYCARB LENSE

CRL18 18" CURVED POLYCARB LENSE

CRL20 20" CURVED POLYCARB LENSE




FLE12 12" FLAT CLEAR LENSE

FLE14 14" FLAT CLEAR LENSE


FLE16 16" FLAT CLEAR LENSE

FLE18 18" FLAT CLEAR LENSE


FLE20 20" FLAT CLEAR LENSE




REF 9.5" DIAMETER REFRACTOR




UGR U- WIRE GUARD




WG-1 WIRE GUARD



WG-2 WIRE GUARD
Available for shades
12" or higher



GU-1 CAST ALUMINUM GUARD



GU-2 CAST ALUMINUM GUARD
Available for shades 12" or higher