



BASELITE – MODERN CONE SHADE – LED – SPEC SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	/	/
	A	B	C	D	E	F	G	H	I	J	K
EXAMPLE:	W513	41	E16	SQ ½"	43	45W	3K	LDM120	PR3	GR13	44

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



A - SHADES

MODERN CONE SHADE

- MCS6** – 10WFLED (MAX)
- MCS16** – 50WLED (MAX)
- MCS21**- 80WLED (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)
 (*SEE NOTES FOR LIMITATIONS*)
 14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB, 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C – MOUNTING OPTIONS

- ½" ARM EXTENSIONS**
E1, E2, E3, E4, B1, E16, E17, E27
- ¾" ARM EXTENSIONS**
E3A, E4A, E5, E6, E7, E8, E9, E10, E11, E12, E13, B15, B15S, E19, E20, E21, E25
- E14 - CREATE YOUR OWN**
(BASELITE WILL TAKE YOUR SKETCH AND FABRICATE A CUSTOM ARM EXTENSION TO MEET YOUR NEEDS).
- ¾" WALL MOUNT**
WM19, WM20, WM21, WM23, WM24, WM25, WM26, WM27, WM28, WM29, WM29V
- LED CORD MOUNT**
LBLC, LWHC, LTCB, LTCW, LTCHB, LTCHW, LTLB, LTLW, LTLB, LTLW, LRCB, LRCW, LRCHB, LRCHW, LFHB, LFHW, LHBL, LHWHC, LCBL, LCWHC, LCHB, LCHW
- STEM MOUNT**
ST6, ST12, ST18, ST24, ST36, ST48, STXX

D – MOUNTING ADD-ONS

- LED ADD-ONS**
LWTM, LSLC, LSTC
- UNIVERSAL ADD-ONS**
SQ ½", SQ ¾", FH ½", FH ¾", TRB ½", TRB ¾", SWL, LGSWL, CNK, INB, RINB

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)
LIGHT EMITTED DIODE (LED)
 10W, 12W, 25W, 35W, 50W, 80W

*NOTE – MAX WATTAGE IS LISTED NEXT TO THE SHADE MODEL NUMBER IN SECTION "A". ALL WATTAGES BELOW THAT ARE ALSO AVAILABLE FOR THE SAME MODEL NUMBER.

G – LED COLOR TEMP

- 27K – 2700 KELVIN
- 3K – 3000 KELVIN
- 35K – 3500 KELVIN
- 4K – 4000 KELVIN
- 5K – 5000 KELVIN

H – ELECTRICAL OPTION

(SEE PAGE 4 FOR DIMMING OPTION SPECIFICATIONS)
LDMF120
LDM120
LDM0-10

I – GLASS OPTIONS

NOT AVAILABLE

J – ACCESSORIES


NOT AVAILABLE

K – ACCESSORY COLOR


SEE SECTION "B" FOR COLOR OPTIONS.

NOTES

- FINISH OPTIONS 20, 21, 22, 23 ARE FOR SOLID BRASS FIXTURES ONLY.
 - FINISH OPTIONS 19, 21, 22, 23, 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
 - FINISH OPTIONS 19, 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
 - FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
 - COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
- *ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
- *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).
- *ALL FIXTURES MOUNT TO A 4-0 JUNCTION BOX.
- *FIXTURE DIMENSIONS MAY VARY ±0.25.
- *CORD AND CANOPY COME IN THE SAME COLOR.



MCS6 H- 4.625" W- 6.5"



MCS16 H- 8.875" W- 15.75"



MCS21 H- 6.75" W- 21.5"



C - MOUNTING OPTIONS

1/2" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED




E1 9"(H) 19.75"(W)




E2 13.5"(H) 36.75"(W)




E3 16.5"(H) 26.5"(W)

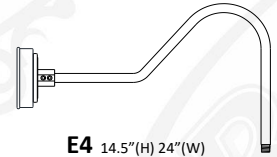


E4 14.5"(H) 24"(W)




B1 7.5"(H) 13.75"(W)



E16 6"(H) 10.25"(W)




E17 6"(H) 11.25"(W)




E27 9"(H) 12.25"(W)

3/4" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

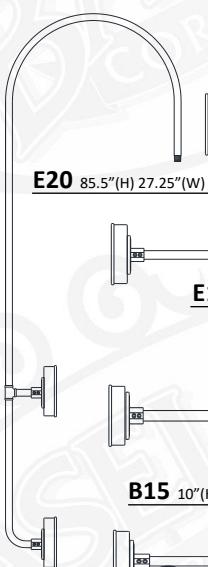


E20 85.5"(H) 27.25"(W)




E3A 16.375"(H) 26.25"(W)

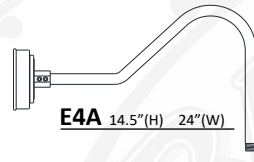


E4A 14.5"(H) 24"(W)




E5 15"(H) 38.75"(W)




E6 10"(H) 24"(W)

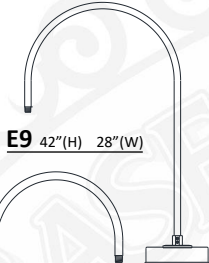


E9 42"(H) 28"(W)



E12 6"(H) 39.25"(W)




E7 9"(H) 50"(W)

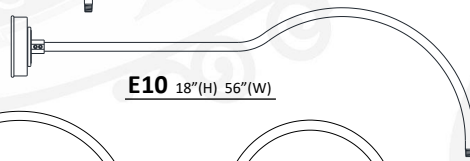


E10 18"(H) 56"(W)




E8 12"(H) 31.5"(W)




B15 10"(H) 24.75"(W)

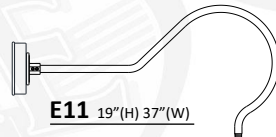

E11 19"(H) 37"(W)



E25 32.5"(H) 28.75"(W)

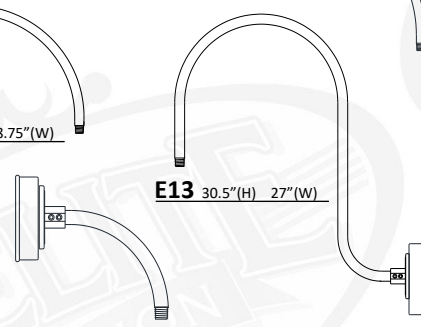

E13 30.5"(H) 27"(W)



B15S 10"(H) 19.75"(W)




E21 12"(H) 28.75"(W)




E19 10.625"(H) 11.5"(W)

NOTES:



- * All arms sold with Cast Backplate (CB)
- * Backplate may vary in size depending on light source.


E14




- * Baselite will take your sketch and fabricate a custom arm extension to meet your needs
- * Dimensions to be determined by customer

1/4" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION *FOR SHADES 10" OR SMALLER IN DIAMETER * MAXIMUM SECTIONS OF MOUNTS ARE DIMENTIONED




WM19 6"(H) 8.25"(W)




WM20 6"(H) 8.25"(W)




WM21 4.75"(H) 8"(W)



WM23 12.5"(H) 8"(W)



WM24 11"(H) 6.375"(W)




WM25 9"(H) 5.5"(W)




C - MOUNTING OPTIONS (CONTINUED)

1/4" WALL MOUNTS (CONTINUED)


*MOUNTS RATED FOR WET LOCATION *FOR SHADES 10" OR SMALLER IN DIAMETER * MAXIMUM SECTIONS OF MOUNTS ARE DIMENTIONED



WM26 12"(H) 9"(W)



WM27 10"(H) 8"(W)



WM28 13"(H) 10"(W)




WM29 9.5"(H) 14"(W)



WM29V 21.75"(H) 15.25"(W)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

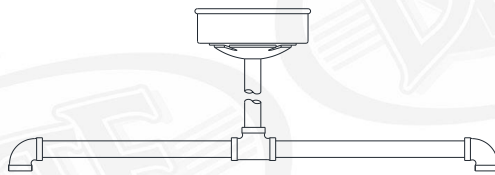

DP24 DOUBLE PENDANT 20"(H) 24"(W)
*DP24 COMES STANDARD WITH LSTC AND ST18



ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D
* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST

LED CORD MOUNTS

*FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY. *CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: 4" (H) 5.5" (W)
*CORD AND CANOPY COME IN THE SAME COLOR.



LBLC 8' BLACK CORD
LWHC 8' WHITE CORD



LTCB 8' BLACK CORD, CABLE, and LOOP
LTCW 8' WHITE CORD, CABLE, and LOOP



LTCHB 8' BLACK CORD, 3' CHAIN, and LOOP
LTCW 8' WHITE CORD, 3' CHAIN, and LOOP



LTLB 8' BLACK TELEPHONE CORD AND CABLE
LTLW 8' WHITE TELEPHONE CORD AND CABLE
* Not available with compact fluorescent



LRCB 8' BLACK CORD, CABLE, and LOOP
LRCW 8' WHITE CORD, CABLE, and LOOP



LRCHB 8' BLACK CORD, 3' CHAIN, and LOOP
LRCHW 8' WHITE CORD, 3' CHAIN, and LOOP




LFHB 8' BLACK CORD WITH FLAT HUB
LFHW 8' WHITE CORD WITH FLAT HUB



LCBC 8' BLACK CORD and CABLE
LCWCH 8' WHITE CORD and CABLE



LCHB 8' BLACK CORD, 3' CHAIN, and LOOP
LCHW 8' WHITE CORD, 3' CHAIN, and LOOP
* Loop may vary due to shade style



NOTES:
*DISTANCE TO LAMP (CF) 10'
*All compact fluorescent and LED housings may vary in size according to light source chosen.

