



BASELITE INSULATOR GLASS – CANDELABRA BASE – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	X	/	X	/	X	/	X	/	X	/	X	/
EXAMPLE:	A	B	C	D	E	F	G	H	I	J	K				
	BLG5	64	TL	25WINC											

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:

A - SHADES

INSULATOR GLASS COLLECTION
BLG1.WM20 – 60WINC (MAX)
BLG1.SBP – 600WINC (MAX)
BLG1.BLC – 600WINC (MAX)
BLG5 – 5-60WINC (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)
 (*SEE NOTES FOR LIMITATIONS*)
 14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB, 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C – GLASS OPTIONS

BASELITE GLASS COLOR
TL – TEAL CLEAR GLASS
CL – CLEAR GLASS

D – LIGHT SOURCE


(SEE PAGE 2 FOR WATTAGE LIMITATIONS)
CANDELABRA E12 BASE
25WINC – 25WINC/2.2WLED
40WINC – 40WINC/3.3WLED
60WINC – 60WINC/5.5WLED

NOTES


- (1). FINISH OPTIONS 75,76, 77, 83, 84, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
- (2). FINISH OPTIONS 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- (3). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.

*ALL FIXTURES MOUNT TO A 4-0 JUNCTION BOX.


*FIXTURE DIMENSIONS MAY VARY ± 0.25.

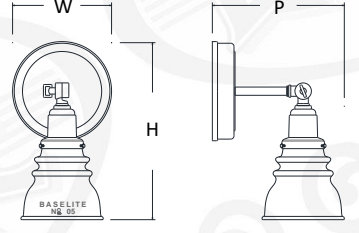


BLG1.WM20 H - 11" W - 6" P - 8"

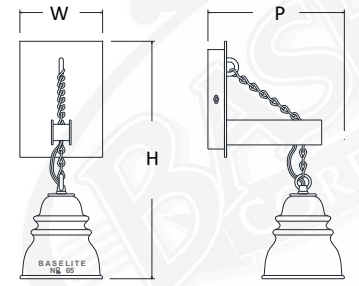

BLG1.SBP H - 14" W - 5" P - 8"

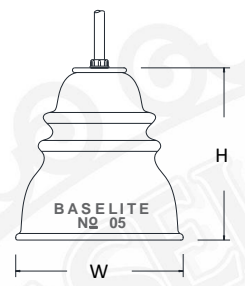

BLG1.BLC H - 5" W - 5"

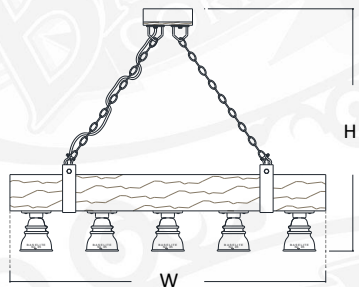

BLG5 H - 36.75" W - 48" D - 6"



BASELITE INSULATOR GLASS – CANDELABRA BASE – SPECIFICATION SHEET

PROJECT NAME: _____ PROJECT TYPE: _____

C - MOUNTING OPTIONS

GLASS OPTIONS



TL - TEAL GLASS WITH BASELITE LOGO



CL - CLEAR GLASS WITH BASELITE LOGO

F – LIGHT SOURCE

CANDELADRA BASE E12 (CAN) FOR INCANDESCENT, LED & COMPACT FLUORESCENT BULBS					
60WINC/5.5WLED (MAX)- BLG1.WM20, BLG.SBP, BLG1.BLC, BLG5					
OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
25WINC	25W/2.2W	PER BULB SPEC	N/A	120-277 VAC	PER BULB SPEC
40WINC	40W/3.3W	PER BULB SPEC	N/A	120-277 VAC	PER BULB SPEC
60WINC	60W/5.5W	PER BULB SPEC	N/A	120-277 VAC	PER BULB SPEC