



BASELITE – BRAXTON – LED – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	X	/	X	/	X
	A	B	C	D	E	F	G	H	I	J	K			
EXAMPLE:	BTD16	41	BLC	-	-	25W	35K	LDM120	-	-	-			

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



BTC16/41G/BLC/41G/100INC

A - SHADES

BRAXTON COLLECTION

- BTC12** - 35WLED (MAX)
- BTC14** - 35WLED (MAX)
- BTC16** - 35WLED (MAX)
- BTD16** - 35WLED (MAX)
- BTW16** - 35WLED (MAX)

B - FINISH OPTIONS

- G15** - GHOST POWDER BLUE
- G41** - GHOST GLOSS BLACK
- 78** - CHALKBOARD BLACK
- G43** - GHOST RED
- G44** - GHOST WHITE
- G97** - GHOST BATTLESHIP GREY

C – MOUNTING OPTIONS

- CORD MOUNT**
- BLC, WHC, LBLC, LWHC

D – MOUNTING ADD-ONS

- UNIVERSAL ADD-ONS**
- CNK

E – MOUNTING COLOR

SEE SECTION “B” FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 2 FOR WATTAGE LIMITATIONS)

- LIGHT EMITTED DIODE (LED)**
- LED10WF, LED12W, LED15WF, LED23WF, LED25W, LED35W**

*NOTE – MAX WATTAGE IS LISTED NEXT TO THE SHADE MODEL NUMBER IN SECTION “A”. ALL WATTAGES BELOW THAT ARE ALSO AVAILABLE FOR THE SAME MODEL NUMBER.

G – LED COLOR TEMP

- 27K** – 2700 KELVIN
- 3K** – 3000 KELVIN
- 35K** – 3500 KELVIN
- 4K** – 4000 KELVIN
- 5K** – 5000 KELVIN

H – ELECTRICAL OPTION

(SEE PAGE 2 FOR DIMMING OPTION SPECIFICATIONS)

- LDM120**
- LDM0-10**

I – GLASS OPTIONS

NOT AVAILABLE

J – ACCESSORIES

NOT AVAILABLE

K – ACCESSORY COLOR


NOT AVAILABLE

NOTES

*ALL FIXTURES MOUNT TO A 4-0 JUNCTION BOX.

*FIXTURE DIMENSIONS MAY VARY ±0.25.


*CORD AND CANOPY COME IN THE SAME COLOR, IF NOT SPECIFIED.

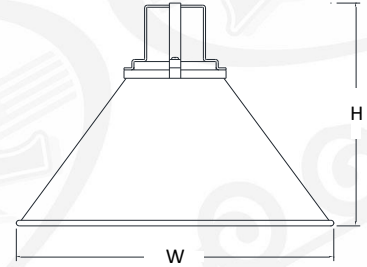


BTC12 H-11” W-12”

BTC14 H-10” W-14”

BTC16 H-12” W-16”

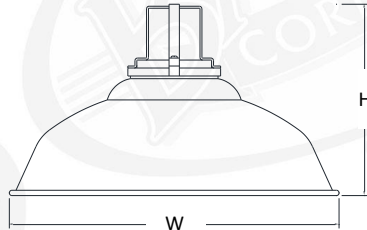

BTW16 H-9” W-16”

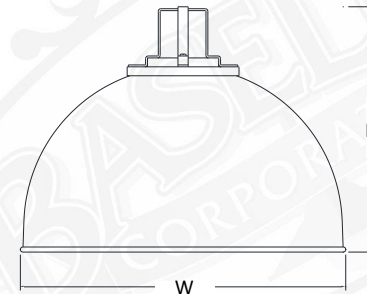

BTD16 H-12” W-16”



C - MOUNTING OPTIONS

LED CORD MOUNTS

*FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY. *CORDS RATED FOR DRY LOCATION
*CANOPY DIMENSIONS: .625" (H) 5.25" (W) AND 4" (H) 5.5" (W) *CORD AND CANOPY COME IN THE SAME COLOR.



BLC 8' BLACK CORD AND CANOPY
WHC 8' WHITE CORD AND CANOPY
*LED10WF, LED15WF, LED23WF MUST CHOOSE THIS CORD OPTION.



LBLC 8' BLACK CORD AND DRIVER CANOPY
LWHC 8' WHITE CORD AND DRIVER CANOPY
*LED12W, LED25W, LED35W MUST CHOOSE THIS CORD OPTION.

D - MOUNTING ADD-ONS

UNIVERSAL ADD-ONS



CNK CANOPY For MULTIPLE FIXTURES
*CNK dimensions vary on number of fixtures applied

F - LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

LIGHT EMITTING DIODE (LED)

LED 25W (MAX) - BTW16
LED 35W (MAX) - BTC12, BTC14, BTC16, BTD16

*IMPORTANT - FOR INCANDESCENT (INC) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT.

EXAMPLE: / LED25W /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
LED10WF	10W	1065	>90	120-277 VAC	TRI-ELV *120 ONLY
LED12W	12W	1480	>90	120-277 VAC	SEE SECTION "H"
LED15WF	15W	1600	>90	120-277 VAC	TRI-ELV *120 ONLY
LED23WF	23W	2500	>90	120-277 VAC	TRI-ELV *120 ONLY
LED25W	25W	2800	>90	120-277 VAC	SEE SECTION "H"
LED35W	35W	3700	>90	120-277 VAC	SEE SECTION "H"

@3500K

H - ELECTRICAL OPTION

LED DIMMING OPTIONS

(LED10WF, LED15WF, LED23WF - ONLY AVAILABLE WITH LDM120 - TRI-ELV DIMMING OPITON) ALL OTHER WATTAGES CAN CHOOSE FROM THE OPTIONS BELOW. CONTACT DRIVER MANUFACTURER FOR FURTHER SPECIFICATIONS.

LDM120 - TRIAC / ELV - INPUT 120 / 277V - DIMMING AT 120 VOLT ONLY

LDM0-10V - 0 - 10V - DIMMING AT 120 / 277V