



# BASELITE – LED - STANTON COLLECTION



PROJECT NAME: \_\_\_\_\_ PROJECT TYPE: \_\_\_\_\_

MODEL #	/	/	/	/	/	/	/	/	X	/	X	/	X	/
EXAMPLE:	A	B	C	D	E	F	G	H	I	J	K			
	UDC14	78	ST12	LSTC	78	35W	3K	LDM120	-	-	-			

\*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_



UDC20.78-80.BLC.35WLED.3K

## A - SHADES

### STANTON SHADE COLLECTION

UDC14 – 15WLED (MAX)

UDC16 – 15WLED (MAX)

UDC20 – 23WLED (MAX)

## B - FINISH OPTIONS

(\*SEE NOTES FOR LIMITATIONS\*)  
(SEE WEBSITE FOR SWATCH COLORS)

44G – GHOST WHITE

78 – CHALKBOARD BLACK

89G – GHOST TAUPE

80 – PALE GOLD (INTERIOR)

## C – MOUNTING OPTIONS

### CORD MOUNT (LED)

LBLC, LWHC

### STEM MOUNT

ST6, ST12, ST18, ST24, ST36, ST48, STXX

## D – MOUNTING ADD-ONS

### LED & CF ADD-ONS

LSTC

## E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

## F – LIGHT SOURCE

(SEE PAGE 2 FOR WATTAGE LIMITATIONS)

### LIGHT EMITTED DIODE (LED)

13W, 15W, 20W, 23W

\*NOTE – MAX WATTAGE IS LISTED NEXT TO THE SHADE MODEL NUMBER IN SECTION "A". ALL WATTAGES LOWER ARE ALSO AVAILABLE FOR THE SAME MODEL NUMBER.

## G – LED COLOR TEMP

(ONLY APPLICABLE FOR LED LIGHT SOURCE. SKIP THIS SECTION IF OPTION DOES NOT APPLY.)

27K – 2700 KELVIN

3K – 3000 KELVIN

35K – 3500 KELVIN

4K – 4000 KELVIN

5K – 5000 KELVIN

## H – ELECTRICAL OPTION

LDM120


LDM0-10

## NOTES


\*ALL FIXTURES MOUNT TO A 4-0 JUNCTION BOX

\*FIXTURE DIMENSIONS MAY VARY ± 0.25"


\*PALE GOLD IS THE STANDARD INSIDE COLOR FOR THE STANTON COLLECTION SHADES. INSIDE COLOR CAN BE CHANGED UPON REQUEST.



**UDC14** H - 14.25" W - 14.5"

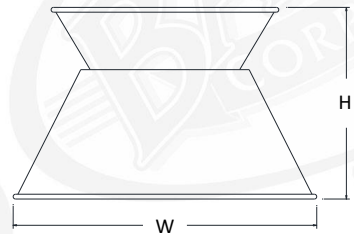

**UDC16** H - 10" W - 16"

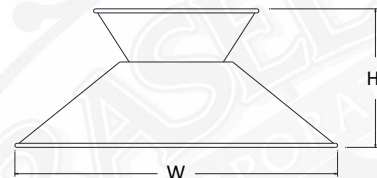

**UDC20** H - 8.5" W - 20"



**C - MOUNTING OPTIONS**

**CORD MOUNT (LED)**

\*CORDS RATED FOR DRY LOCATION      \*CANOPY DIMENSIONS: 4" (H) 5.5" (W)      \*CORD AND CANOPY COME IN THE SAME COLOR.



**BLC**      8' BLACK CORD (INCLUDES CANOPY)  
**WHC**      8' WHITE CORD (INCLUDES CANOPY)

**STEM MOUNTS**

\*STEMS RATED FOR DAMP LOCATION




**ST(XX)**      STEM- 1/2"  
XX = LENGTH OF STEM  
(EXAMPLE -- "ST18" = STEM MOUNT 18" LENGTH)  
\*CANOPY NOT INCLUDED, ADD IN SECTION D  
\* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST

**D - MOUNTING ADD-ONS**

**STEM AND ARM ADD-ONS (LED)**

\* FOR LED OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



**STC**      STEM MOUNT CANOPY

**F – LIGHT SOURCE**

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

**LIGHT EMITTING DIODE (LED)**

**LED 15W (MAX)-** UDC14, UDC16  
**LED 23W (MAX)-** UDC20

**\*IMPORTANT** – FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE MAX WATTAGE AVAILABILITY.      **EXAMPLE: /LED23W /**

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
LED13W	13W	1770	>90	120-277 VAC	0-10V - See section "H"
LED15W	15W	1361	>90	120-277 VAC	TRIAC - See section "H"
LED20W	20W	2360	>90	120-277 VAC	0-10V - See section "H"
LED23W	23W	2057	>90	120-277 VAC	TRIAC - See section "H"

@3000K

**H – ELECTRICAL OPTION**

MOST BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES. PLEASE SEE NOTES BELOW AND FOR FURTHER DETAILS CONTACT THE FACTORY. FOR DIMMING DRIVER OPTIONS SOME RESTRICTIONS MAY APPLY DUE TO THE SIZE OF THE DRIVER AND FIXTURE.

**LED DIMMING OPTIONS**

FOR TRIAC OR 0-10V OPTOIN CHOOSE A PART NUMBER FROM THE OPTIONS BELOW. CONTACT DRIVER MANUFACTURER FOR SPECIFICATIONS.

**LDM120** - TRIAC DIMMING AT 120 VOLT ONLY (AVAILABLE FOR 15W AND 23W OPTIONS ONLY).  
**LDM0-10V** – 0 – 10v - DIMMING AT 120 / 277 VOLTS (AVAILABLE FOR 13W AND 20W OPTIONS ONLY).