



BASELITE – ANGLE SHADE – LED – SPEC SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL # / / / / / / / / / / /

EXAMPLE: A B C D E F G H I J K
 A812 41 E16 CB ½" 43 25W 3K LDM120 PR3 GU-2 44

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:

A - SHADES

ANGLE SHADE SERIES

A807 - 12WLED (MAX)

A810 - 12WLED (MAX)

A812 - 25WLED (MAX)

A814 - 25WLED (MAX)

B - FINISH OPTIONS

(*SEE NOTES FOR LIMITATIONS*)
 (SEE WEBSITE FOR SWATCH COLORS)

38, 40, 41, 42, 43, 44, 45, 46, 48, 49,
 50, 51, 52, 53, 54, 55, 59, 60, 61, 62,
 63, 74, 81, 87, 97

C – MOUNTING OPTIONS

½" ARM EXTENSIONS

E1, E2, E2S, E3, E4, B1, E16,
 E17, E18A, E22, E23, E24

¾" ARM EXTENSIONS

E3A, E4A, E5, E6, E7, E8, E9,
 E10, E11, E12, E13, B1S,
 E19, E20, E21, E25

E14 - CREATE YOUR OWN

(BASELITE WILL TAKE YOUR SKETCH
 AND FABRICATE A CUSTOM ARM
 EXTENSION TO MEET YOUR NEEDS).

COMPACT FLUORESCENT CORD MOUNT

CFBLC, CFWHC, CFTCB, CFTCW,
 CFTCHB, CFTCHW, CFTLB, CFTLW,
 CFRCB, CFRCW, CFRCHB, CFRCHW,
 CFFHB, CFFHW, CFHBLC, CFHWHC,
 CFCBLC, CFCWHC, CFCB, CFCWH

STEM MOUNT

DP24, ST6, ST12, ST18, ST24, ST36,
 ST48, STXX

D – MOUNTING ADD-ONS

LED ADD-ONS

LWTM, LSLC, LSTC

UNIVERSAL ADD-ONS

FH ½", FH ¾", TRB ½", TRB ¾",
 LGSWL, SMSWL

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)

LIGHT EMITTED DIODE (LED)

10W, 12W, 25W

*NOTE – MAX WATTAGE IS LISTED NEXT TO THE
 SHADE MODEL NUMBER IN SECTION "A". ALL
 WATTAGES BELOW THAT ARE ALSO AVAILABLE FOR
 THE SAME MODEL NUMBER.

G – LED COLOR TEMP

27K – 2700 KELVIN

3K – 3000 KELVIN

35K – 3500 KELVIN

4K – 4000 KELVIN

5K – 5000 KELVIN

H – ELECTRICAL OPTION

(SEE PAGE 4 FOR DIMMING OPTION SPECIFICATIONS)

LDM120

LDM0-10

I – GLASS OPTIONS

CL3, CL4, CLT3, CLT4, BL3, BL4, RE3, RE4,
 GR3, GR4, AH3, AH4, FR3, FR4, FRT3, FRT4,
 PR3, PR4

J – ACCESSORIES

GU-1, GU-2, GR7, GR10, GR12, GR14

K – ACCESSORY COLOR

SEE SECTION "B" FOR COLOR
 OPTIONS.

NOTES

(1). FINISH OPTIONS 38, 40, 49, 54, 61, 62, 63
 ONLY AVAILABLE INSIDE AND OUT OF
 FIXTURE. OTHER FINISHES ARE WHITE INSIDE.

(2). FINISH OPTIONS FOR SHADES ≤ 10" IN
 DIAMETER ARE THE SAME INSIDE AND OUT
 OF FIXTURE. SHADES > 10" IN DIAMETER ARE
 WHITE ON THE INSIDE.

(3). FINISH OPTIONS 61 AND 62 ARE
 FINISHED WITH A SUPERCHROME ON THE
 INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.

(4). COLOR CORDS ARE NOT APPLICABLE FOR
 LED OPTIONS.
 *ALL ARMS COME WITH A CAST BACKPLATE
 (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
 *ACCORDING TO THE LIGHT SOURCE THE
 BACKPLATE MAY VARY IN SIZE. (EXAMPLE:
 LED LIGHT SOURCE WILL HAVE A DEEPER
 BACKPLATE TO HOUSE THE DRIVER.).


*ALL FIXTURES MOUNT TO A 4-O JUNCTION
 BOX.

*FIXTURE DIMENSIONS MAY VARY ± 0.25.


*CORD AND CANOPY COME IN THE SAME
 COLOR.




A810/62/E1/CB½"/64/100INC

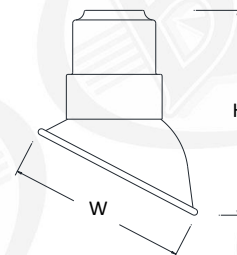


A807 H - 8" W - 7"

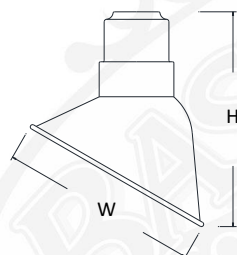

A810 H - 10.75" W - 10"

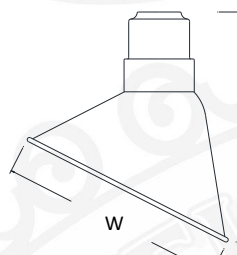

A812 H - 12.25" W - 12"

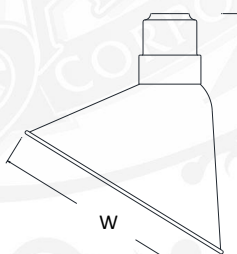


A814 H - 14.5" W - 14"



C - MOUNTING OPTIONS


1/2" ARM EXTENSIONS

* ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

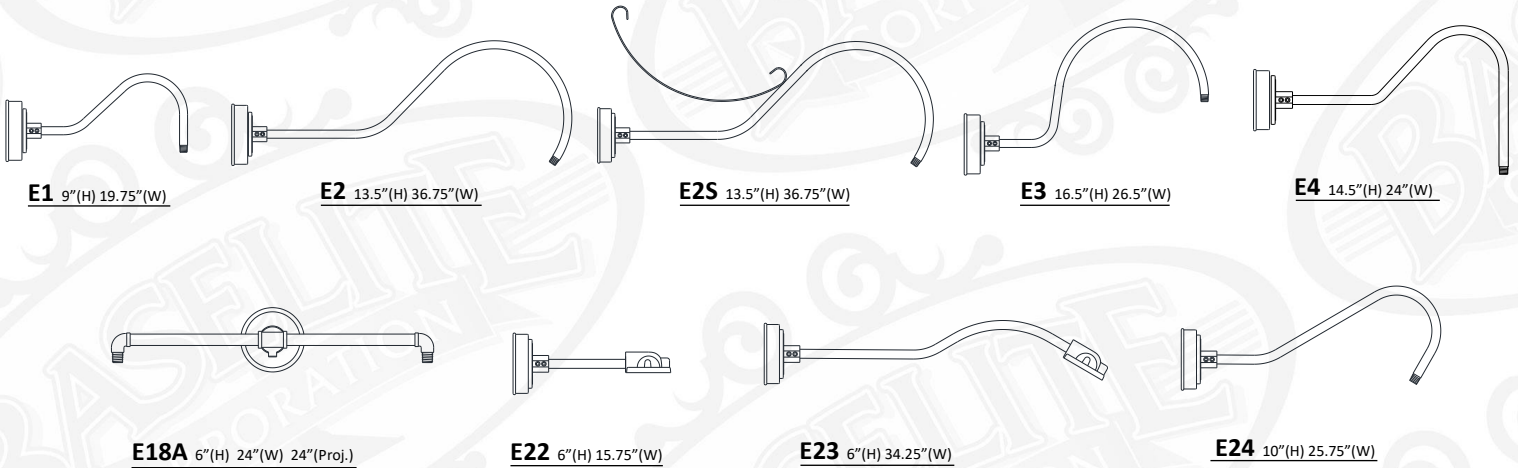

3/4" ARM EXTENSIONS

* ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

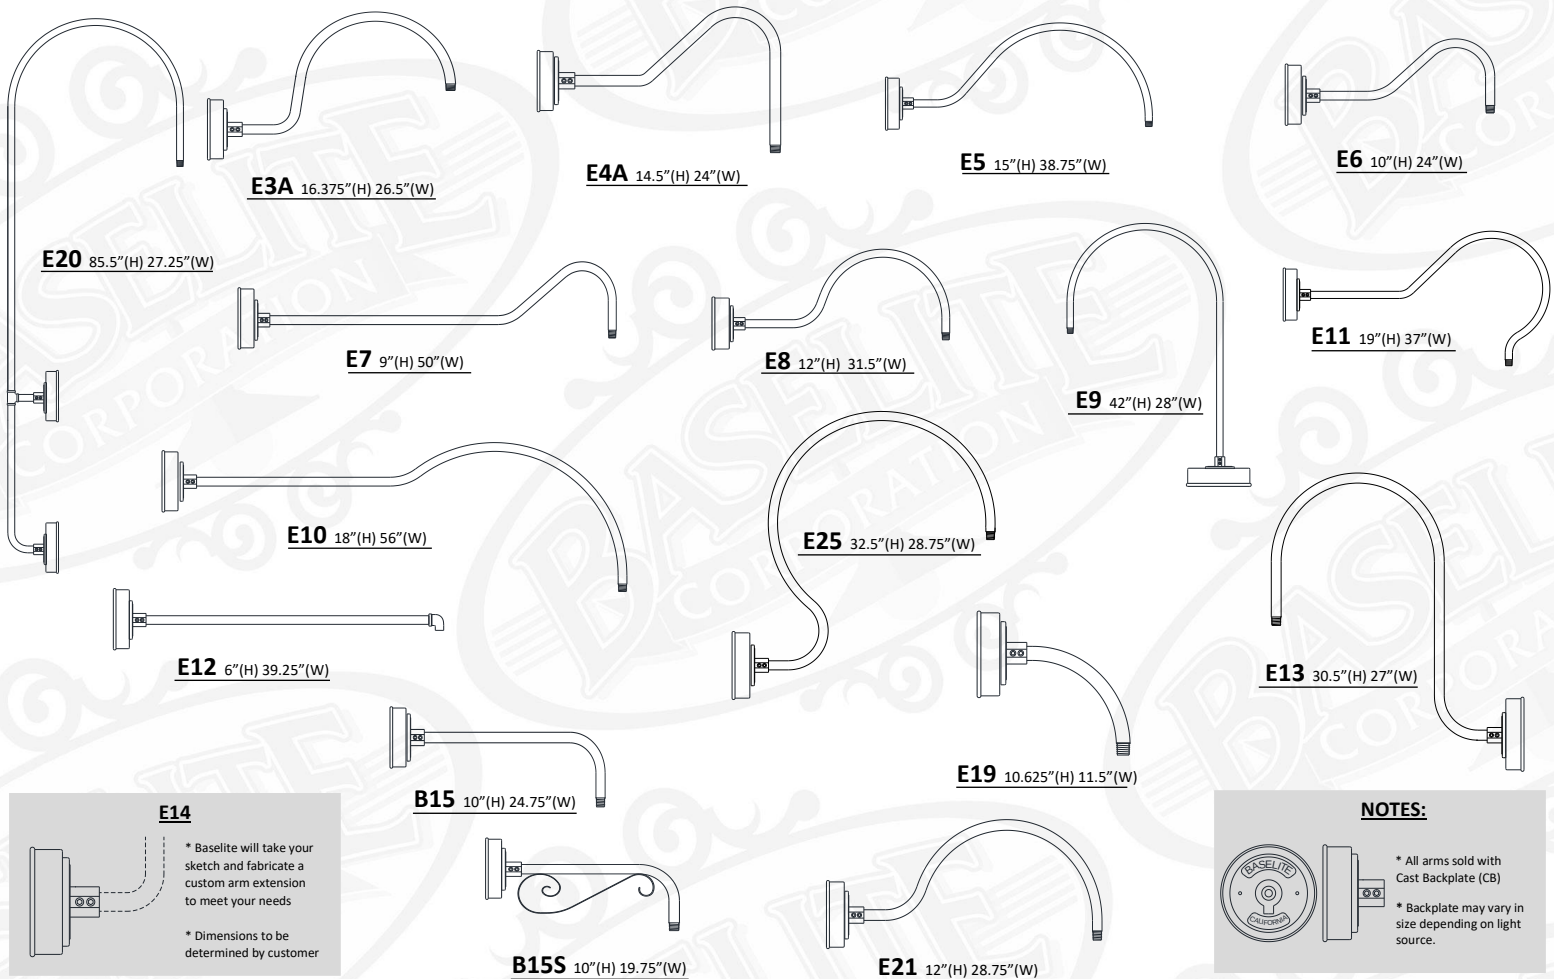




C - MOUNTING OPTIONS (CONTINUED)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

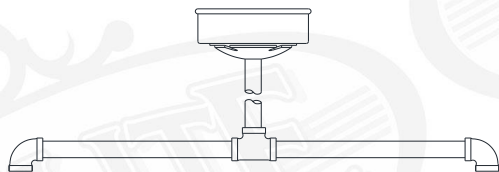

DP24 DOUBLE PENDANT 20"(H) 24"(W)
*DP24 COMES STANDARD WITH CFSTC AND ST18



ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D
* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST

COMPACT FLUORESCENT CORD MOUNTS

*FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY. *CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: 4" (H) 5.5" (W) *CORD AND CANOPY COME IN THE SAME COLOR.



LBLC 8' BLACK CORD
LWHC 8' WHITE CORD



LTCB 8' BLACK CORD, CABLE, and LOOP
LTCW 8' WHITE CORD, CABLE, and LOOP



LTCHB 8' BLACK CORD, 3' CHAIN, and LOOP
LTCHW 8' WHITE CORD, 3' CHAIN, and LOOP



LRCB 8' BLACK CORD, CABLE, and LOOP
LRCW 8' WHITE CORD, CABLE, and LOOP



LRCHB 8' BLACK CORD, 3' CHAIN, and LOOP
LRCHW 8' WHITE CORD, 3' CHAIN, and LOOP




LCHB 8' BLACK CORD, 3' CHAIN, and LOOP
LCHW 8' WHITE CORD, 3' CHAIN, and LOOP
* Loop may vary due to shade style



LFHB 8' BLACK CORD WITH FLAT HUB
LFHW 8' WHITE CORD WITH FLAT HUB



LCBLC 8' BLACK CORD and CABLE
LCWHC 8' WHITE CORD and CABLE



NOTES:


*DISTANCE TO LAMP (CF) 10'

*All compact fluorescent and LED housings may vary in size according to light source chosen.


D - MOUNTING ADD-ONS

COMPACT FLUORESCENT STEM AND ARM ADD-ONS


* FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



LWTM WEATHERTIGHT CF WALL MOUNT



LSLC CF SLOPE CEILING CANOPY



LSTC CF STEM MOUNT CANOPY




D - MOUNTING ADD-ONS (CONTINUED)


UNIVERSAL STEM AND ARM ADD-ONS

* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:


MODEL #: -/-/-/LWTM, TRB 1/2", LGSWL -/-/-/-/-/-/-/-/-/
A B C D E F G H I J K



SWL 1/2" NPT swivel
For all arms 7" wide in diameter or smaller



LGSWL 1/2" NPT SWIVEL
For all shades greater than 7" wide in diameter



FH 1/2" FLAT HUB 1/2"
FH 3/4" FLAT HUB 3/4"



TRB 1/2"-4' Cable SUPPORT
TRB 3/4"-4' Cable SUPPORT

F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

LIGHT EMITTING DIODE (LED)

LED 12W (MAX) - A807, A810
LED 25W (MAX) - A812, A814

***IMPORTANT** – FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE MAX WATTAGE AVAILABILITY. **EXAMPLE: /LED25W /**

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
LED10WF	10W	1280	>90	120-277 VAC	TRI-ELV *120V ONLY
LED12W	12W	1481	>90	120-277 VAC	See section "H"
LED25W	25W	2812	>90	120-277 VAC	See section "H"
		@3500K			

H – ELECTRICAL OPTION

MOST BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES. PLEASE SEE NOTES BELOW AND FOR FURTHER DETAILS.

LED DIMMING OPTIONS

(LED10WF – ONLY AVAILABLE WITH **LDM120** - TRI-ELV DIMMING OPITON) ALL OTHER WATTAGES CAN CHOOSE FROM THE OPTIONS BELOW. CONTACT DRIVER MANUFACTURER FOR FURTHER SPECIFICATIONS.

LDM120 - TRIAC / ELV – INPUT 120 / 277V - DIMMING AT 120 VOLT ONLY

LDM0-10V – 0 – 10V – DIMMING AT 120 / 277 VOLTS



I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.



CL3 3" CLEAR GLASS
CLT3 3" CLEAR TEMPERED



PR3 3" PRISMATIC GLASS



RE3 3" RED GLASS



BL3 3" BLUE GLASS



FR3 3" FROSTED GLASS
FRT3 3" FROSTED TEMPERED




AH3 3" AMBER HYDE GLASS




GR3 3" GREEN GLASS

GLASS – DIMENSIONS
3" GLASS
Diameter 3.34"
Height 6.93"
Fitter 3.29"


GLASS – MAX WATTAGE
3" GLASS – 100W INC / LED12W




J – ACCESSORIES



GR07 7" WIRE GRILL
GR10 10" WIRE GRILL
GR12 12" WIRE GRILL
GR14 14" WIRE GRILL



GU-1 CAST ALUMINUM GUARD



GU-2 CAST ALUMINUM GUARD