



# BASELITE - CYLINDER – CF– SPECIFICATION SHEET



PROJECT NAME: \_\_\_\_\_ PROJECT TYPE: \_\_\_\_\_

MODEL # / / / / / / / / / / /

EXAMPLE: A B C D E F G H I J K  
CY510 41 ST18 STC 43 100INC - - - -

\*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES: **BABA COMPLIANT**



CY510/93/ST18/58/100INC

## A - SHADES

### CYLINDERS

**CY48** - 32WCF (MAX)  
**CY510** - 42WCF (MAX)  
**CY816** - 57WCF (MAX)  
**CY618** - 42WCF (MAX)  
**CY620** - 42WCF (MAX)  
**CYB510** - 42WCF (MAX)  
**CYB816** - 57WCF (MAX)  
**CYBU510** - 2-26WCF (MAX)  
**CYBU816** - 42WCF (MAX)  
**CG512** - 42WCF (MAX)  
**PD2012** - 42WCF (MAX)  
**SD2012** - 42WCF (MAX)

## B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)  
(\*SEE NOTES FOR LIMITATIONS\*)  
14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB,  
20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40,  
41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51,  
52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64,  
65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79,  
80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91,  
92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

## C – MOUNTING OPTIONS

### COMPACT FLUORESCENT CORD MOUNT

CFMCB, CFMCW, CFMTCB, CFMTCW,  
CFMTCB, CFMTCHW, CFMRCB, CFMRCW,  
CFMRCHB, CFMRCHW, CFMFHB, CFMFHW,  
CFMCBLC, CFMCWLC, CFMCHB, CFMCHW

### STEM MOUNT

ST6, ST12, ST18, ST24, ST36, ST48, STXX

## D – MOUNTING ADD-ONS

### CF ADD-ONS

CFSLC, CFSTC

### UNIVERSAL ADD-ONS

FH ½", FH ¾", SWL, LGSWL, CNK

## E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

## F – LIGHT SOURCE

(SEE PAGE 3 FOR WATTAGE LIMITATIONS)

### COMPACT FLUORESCENT (CF)

26W, 32W, 42W

## G – LED COLOR TEMP

NOT AVAILABLE

## H – ELECTRICAL OPTION

(SEE PAGE 3 FOR DIMMING OPTION SPECIFICATIONS)

**CDM120**

**CDM277**

**CDM120/277**

## I – GLASS OPTIONS

NOT AVAILABLE

## J – ACCESSORIES

NOT AVAILABLE

## K – ACCESSORY COLOR

NOT AVAILABLE

## NOTES


- (1). FINISH OPTIONS 20, 21, 22, 23 ARE FOR SOLID BRASS FIXTURES ONLY.
- (2). FINISH OPTIONS 19, 21, 22, 23, 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
- (3). FINISH OPTIONS 19, 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- (4). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- (5). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.  
\*ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).  
\*ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).  
\*ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.  
\*FIXTURE DIMENSIONS MAY VARY ±0.25.  
\*CORD AND CANOPY COME IN THE SAME COLOR.



**CY48** H - 8" W - 4"

**CY510** H - 10" W - 5"

**CY816** H - 16" W - 8"




**CYB510** H - 10" W - 5" P - 9"

**CYB816** H - 16" W - 8" P - 12"

\*FIXTURES COME AS SHOWN

\*ALL MOUNTING OPTIONS DO NOT APPLY

\*WET LOCATION RATED




**CYBU510** H - 10" W - 5" P - 9"

**CYBU816** H - 16" W - 8" P - 12"


\*FIXTURES COME AS SHOWN

\*ALL MOUNTING OPTIONS DO NOT APPLY


\*WET LOCATION RATED



**CG512** H - 12" W - 5"



**SD2012** H - 12" W - 20"



**PD2012** H - 12" W - 20"



**CY618** H - 6" W - 18"


**CY620** H - 6" W - 20"



## C - MOUNTING OPTIONS

### STEM MOUNTS

\*STEMS RATED FOR WET AND DAMP LOCATION

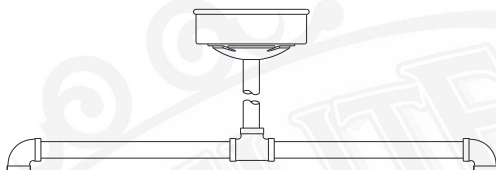

**DP24** DOUBLE PENDANT 20"(H) 24"(W)  
\*DP24 COMES STANDARD WITH CFSTC AND ST18



**ST(XX)** STEM- 1/2" NPT  
XX = LENGTH OF STEM  
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)  
\*CANOPY NOT INCLUDED, ADD IN SECTION D  
\* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST




**SC24** SCROLL STEM 33"(H) 26"(W)  
\*SC24 COMES STANDARD WITH CFSTC

### COMPACT FLUORESCENT CORD MOUNTS

\*FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY. \*CORDS RATED FOR DRY LOCATION  
\*CANOPY DIMENSIONS: 4" (H) 5.5" (W) \*CORD AND CANOPY COME IN THE SAME COLOR.



**CFMCB** 8' BLACK CORD  
**CFMCW** 8' WHITE CORD



**CFMTCB** 8' BLACK CORD, CABLE, and LOOP  
**CFMTCW** 8' WHITE CORD, CABLE, and LOOP



**CFMTCHB** 8' BLACK CORD, 3' CHAIN, and LOOP  
**CFMTCHW** 8' WHITE CORD, 3' CHAIN, and LOOP



**CFMRCB** 8' BLACK CORD, CABLE, and LOOP  
**CFMRCW** 8' WHITE CORD, CABLE, and LOOP




**CFMRCHB** 8' BLACK CORD, 3' CHAIN, and LOOP  
**CFMRCHW** 8' WHITE CORD, 3' CHAIN, and LOOP




**CFMCHB** 8' BLACK CORD, 3' CHAIN, and LOOP  
**CFMCHW** 8' WHITE CORD, 3' CHAIN, and LOOP  
\* Loop may vary due to shade style



**CFMFHB** 8' BLACK CORD WITH FLAT HUB  
**CFMFHW** 8' WHITE CORD WITH FLAT HUB




**CFMCBLC** 8' BLACK CORD and CABLE  
**CFMCWHC** 8' WHITE CORD and CABLE

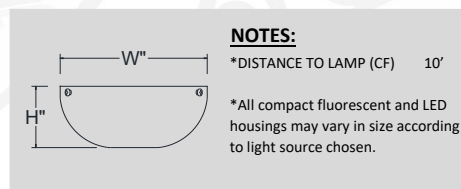

## D - MOUNTING ADD-ONS

### COMPACT FLUORESCENT STEM AND ARM ADD-ONS

\* FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



**CFSLC** CF SLOPE CEILING CANOPY



**CFSTC** CF STEM MOUNT CANOPY






## D - MOUNTING ADD-ONS (CONTINUED)

### UNIVERSAL STEM AND ARM


\* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:

MODEL #: -/-/-/WTM, TRB 1/2", LGSWL/-/-/-/-/-/-/-/-/-/  
A B C D E F G H I J K




#### **CNK** CANOPY For MULTIPLE FIXTURES

\*CNK dimensions vary on number of fixtures applied



#### **FH 1/2"** FLAT HUB 1/2"

#### **FH 3/4"** FLAT HUB 3/4"



#### **LGSWL** 1/2" NPT SWIVEL

For all shades greater than 7" wide in diameter

## F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

### COMPACT FLOURESCENT (CF)

**CF 2-26W(MAX)** - CYBU510  
**CF 26W, OR 32W(MAX)** - CY48  
**CF 26W, 32W, OR 42(MAX)** - CY510, CYB510, CG512, PD2012, SD2012  
**CF 26W, 32W 42, OR 57(MAX)** - CY816, CYB816  
**CF 2-26W, 32W, OR 42(MAX)** - CY618, CY620, CYBU816

**\*IMPORTANT – FOR COMPACT FLOURESCENT (CF) LIGHT SOURCE,**  
FIXTURES ARE LIMITED DUE TO THE SIZE OF THE SHADE. PLEASE SEE THE  
CHART TO THE LEFT TO SEE WHAT WATTAGE IS COMPARABLE FOR EACH  
FIXTURE WHEN ORDERING. EXAMPLE: / CF42W /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
CF26W	26W	PER BULB SPECS	>90	120-277 VAC	0-10V
CF32W	32W	PER BULB SPECS	>90	120-277 VAC	0-10V
CF42W	42W	PER BULB SPECS	>90	120-277 VAC	0-10V
CF57W	57W	PER BULB SPECS	>90	120-277 VAC	0-10V

## H – ELECTRICAL OPTION

MOST BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES. PLEASE SEE NOTES BELOW AND FOR FURTHER DETAILS CONTACT THE FACTORY. FOR DIMMING BALLAST OPTION PLEASE CHOOSE MARK X OR MARK VII, SO RESTRICTIONS APPLY DUE TO THE SIZE OF THE BALLAST AND FIXTURE.

### COMPACT FLUORESCENT DIMMING OPTIONS

PROVIDED WITH ADVANCE TRANSFORMER, PLEASE CHOOSE MARK 10 OR MARK 7 WITH SPECIFIED VOLTAGE FROM THE LIST BELOW. CONTACT BALLAST MANUFACTURER FOR SPECIFICATIONS.

**CDM7-120/277** - ADVANCE MARK 7 0-10v ELECTRICAL BALLST – 120/277 VOLT

**CDM10-120** - ADVANCE MARK 10 TRI-ELV ELECTRICAL BALLST – 120 VOLT

**CDM10-277** - ADVANCE MARK 10 TRI-ELV ELECTRICAL BALLST – 277 VOLT