



BASELITE - SIGN DISPLAY LIGHT SERIES - GU-10 - SPEC



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	X	/	/	/	/	/	/	X	/	/	X
	A	B	C	D	E	F	G	H	I	J	K		
EXAMPLE:	K1	41	SD5	CB ½"	43	25W	3K	LDM120	-	-	-		

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES: **BABA COMPLIANT**



K1/78/SD5/75WGU10

A - SHADES

SIGN DISPLAY LIGHT SERIES

K1 - 75W (MAX)

B - FINISH OPTIONS

(*SEE NOTES FOR LIMITATIONS*)

(SEE WEBSITE FOR SWATCH COLORS)

38, 40, 41, 42, 43, 44, 45, 46, 48, 49,
50, 51, 52, 53, 54, 55, 59, 60, 61, 62,
63, 74, 81, 87, 97

C - MOUNTING OPTIONS

SD1
SD2
SD3
SD4
SD5
SD6

D - MOUNTING ADD-ONS

UNIVERSAL ADD-ONS

LGSWL, SMSWL

E - MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F - LIGHT SOURCE

(SEE PAGE 3 FOR WATTAGE LIMITATIONS)

HALOGEN GU-10 (GU10)

75W(MAX)

G - LED COLOR TEMP

NOT AVAILABLE

H - ELECTRICAL OPTION

NOT AVAILABLE

I - GLASS OPTIONS

NOT AVAILABLE

J - ACCESSORIES

NOT AVAILABLE

K - ACCESSORY COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

NOTES

(1). FINISH OPTIONS 38, 40, 49, 54, 61, 62, 63 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.

(2). FINISH OPTIONS FOR SHADES ≤ 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES > 10" IN DIAMETER ARE WHITE ON THE INSIDE.

(3). FINISH OPTIONS 61 AND 62 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.

(4). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.

*ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).


*ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).

*ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.

*FIXTURE DIMENSIONS MAY VARY ± 0.25.

*CORD AND CANOPY COME IN THE SAME COLOR.

SHADE DIMENSIONS



K1 H - 3.25" W - 2.875"




C - MOUNTING OPTIONS


DIMENSIONS ARE REFLECTED UPON APPLICATION OF K1 SHADE ONTO MOUNTING OPTION

SD1

SIDE VIEW


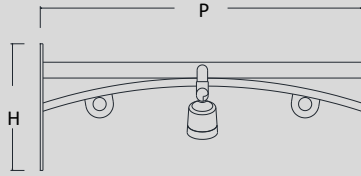


FRONT VIEW

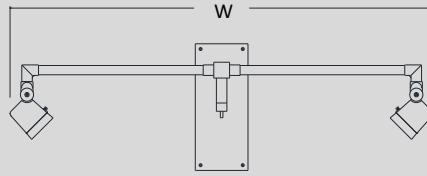



	HEIGHT	WIDTH	PROJ.
K1	12"	40"	30.5"

SD2

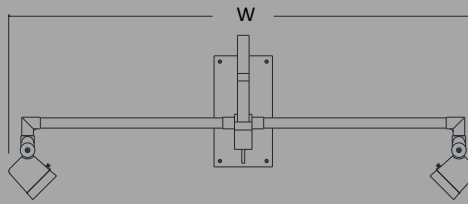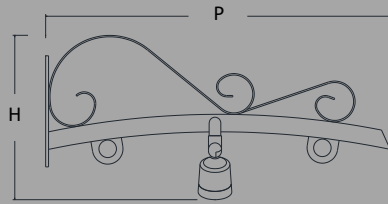



	HEIGHT	WIDTH	PROJ.
K1	14"	40"	30.5"

SD3

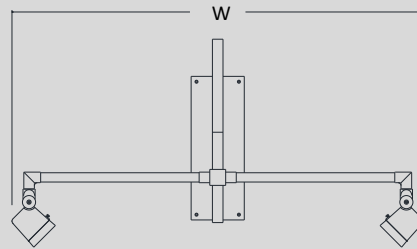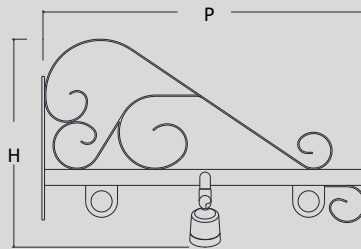



	HEIGHT	WIDTH	PROJ.
K1	19.5"	38.75"	30.5"

SD4

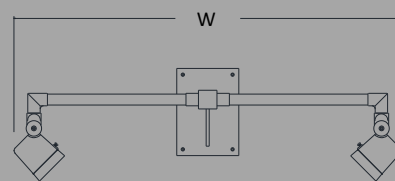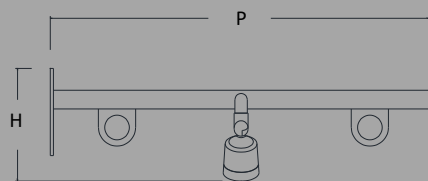



	HEIGHT	WIDTH	PROJ.
K1	9"	31.25"	30.5"

SD5

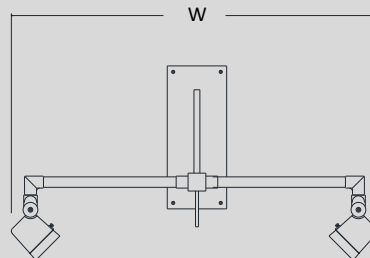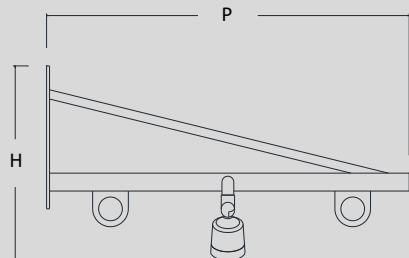

	HEIGHT	WIDTH	PROJ.
K1	16.25"	31.25"	30.5"

SD6

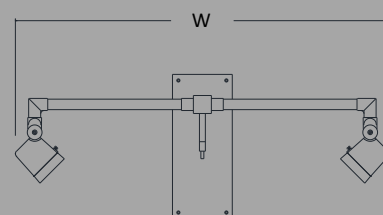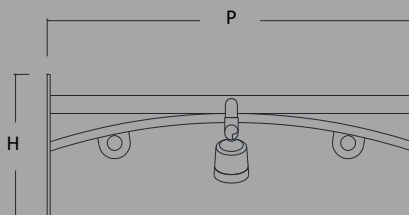


	HEIGHT	WIDTH	PROJ.
K1	12"	31.25"	30.5"




D - MOUNTING ADD-ONS

UNIVERSAL STEM AND ARM ADD-ONS



SWL 1/2" NPT swivel
For all shades 7" wide in
diameter or smaller



LGSWL 1/2" NPT SWIVEL
For all shades greater than
7" wide in diameter

F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS.

HALOGEN (GU-10) BI PIN					
GU-10 - 75W – K1			*IMPORTANT – FOR INCANDESCENT (INC) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT. EXAMPLE: / 75WGU10 /		
OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
6WGU10	75W	PER BULB SPECS	>90	12V	N/A

*TWO GU-10 BASE 75W MAX– (ONE PER SHADE)