



BASELITE - SIGN DISPLAY LIGHT SERIES - INC - SPEC SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	X	/	/	/	/	/	/	X	/	/	X
	A	B	C	D	E	F	G	H	I	J	K		
EXAMPLE:	A807	41	SD1	CB ½"	43	25W	3K	LDM120	-	-	-		

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES: **BABA COMPLIANT**



SD1/78/A807/100WINC

A - SHADES

SIGN DISPLAY LIGHT SERIES

A807 – 100WINC(MAX)

A810 – 100WINC (MAX)

M707 – 100WINC (MAX)

M710 – 100WINC (MAX)

M710S – 100WINC (MAX)

DS07 – 100WINC (MAX)

B - FINISH OPTIONS

(*SEE NOTES FOR LIMITATIONS*)

(SEE WEBSITE FOR SWATCH COLORS)

38, 40, 41, 42, 43, 44, 45, 46, 48, 49,

50, 51, 52, 53, 54, 55, 59, 60, 61, 62,

63, 74, 81, 87, 97

C - MOUNTING OPTIONS

SD1

SD2

SD3

SD4

SD5

SD6

D - MOUNTING ADD-ONS

UNIVERSAL ADD-ONS

LGSWL, SMSWL

E - MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F - LIGHT SOURCE

(SEE PAGE 3 FOR WATTAGE LIMITATIONS)

INCANDESCENT (INC)

100W

G - LED COLOR TEMP

NOT AVAILABLE

H - ELECTRICAL OPTION

NOT AVAILABLE

I - GLASS OPTIONS

NOT AVAILABLE

J - ACCESSORIES

GR7, GR8, GR10

K - ACCESSORY COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

NOTES

(1). FINISH OPTIONS 38, 40, 49, 54, 61, 62, 63 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.

(2). FINISH OPTIONS FOR SHADES ≤ 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES > 10" IN DIAMETER ARE WHITE ON THE INSIDE.


(3). FINISH OPTIONS 61 AND 62 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.

*ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).


*ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.

*FIXTURE DIMENSIONS MAY VARY ± 0.25.


SHADE DIMENSIONS




A807 H - 8" W - 7"




A810 H - 10.75" W - 10"



M707 H - 8.5" W - 7"



M710 H - 11" W - 10"



M710S H - 9.5" W - 10"



DS07 H - 8.5" W - 7"




C - MOUNTING OPTIONS


DIMENSIONS ARE REFLECTED UPON APPLICATION OF SHADE STYLE ONTO MOUNTING OPTION

SD1

SIDE VIEW




FRONT VIEW

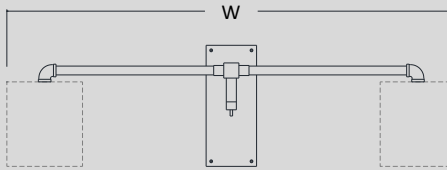


	HEIGHT	WIDTH	PROJ.
A807	12"	43.5"	30.5"
A810	14.375"	43.75"	30.5"
M707	12"	43.5"	30.5"
M710	14.5"	44"	30.5"
M710S	13"	43.5"	30.5"
DS07	12.25"	43.75"	30.5"

SD2

SIDE VIEW




FRONT VIEW

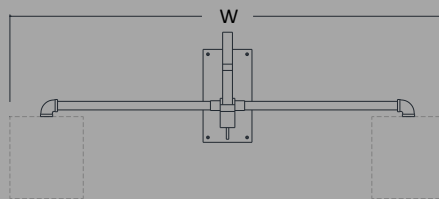


	HEIGHT	WIDTH	PROJ.
A807	16.5"	43.5"	29.5"
A810	19.25"	43.75"	29.5"
M707	17"	43.5"	29.5"
M710	19.5"	44"	29.5"
M710S	18"	43.5"	29.5"
DS07	17.25"	43.75"	29.5"

SD3

SIDE VIEW




FRONT VIEW

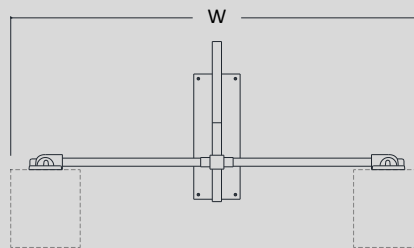


	HEIGHT	WIDTH	PROJ.
A807	21.75"	43.5"	30.5"
A810	24.5"	43.75"	30.5"
M707	22.25"	43.5"	30.5"
M710	24.75"	44"	30.5"
M710S	23.25"	43.5"	30.5"
DS07	22.75"	43.75"	30.5"

SD4

SIDE VIEW

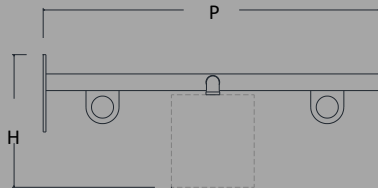


FRONT VIEW

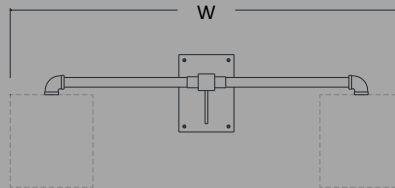


	HEIGHT	WIDTH	PROJ.
A807	11.625"	34.5"	30.5"
A810	14.375"	34.75"	30.5"
M707	12"	34.5"	30.5"
M710	14.5"	35"	30.5"
M710S	13"	34.5"	30.5"
DS07	12.25"	34.75"	30.5"

SD5

SIDE VIEW




FRONT VIEW




	HEIGHT	WIDTH	PROJ.
A807	18.875"	34.5"	30.5"
A810	21.5"	34.75"	30.5"
M707	19.375"	34.5"	30.5"
M710	21.75"	35"	30.5"
M710S	20.25"	34.5"	30.5"
DS07	19.5"	34.75"	30.5"

SD6

SIDE VIEW



FRONT VIEW

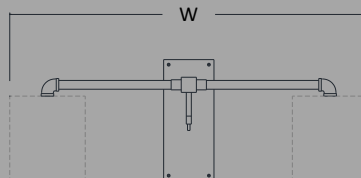


	HEIGHT	WIDTH	PROJ.
A807	12"	34.5"	30.5"
A810	14.25"	34.75"	30.5"
M707	12"	34.5"	30.5"
M710	14.5"	35"	30.5"
M710S	13"	34.5"	30.5"
DS07	12.25"	34.75"	30.5"




D - MOUNTING ADD-ONS

UNIVERSAL STEM AND ARM ADD-ONS



SWL 1/2" NPT swivel
For all shades 7" wide in diameter or smaller



LGSWL 1/2" NPT SWIVEL
For all shades greater than 7" wide in diameter


F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS.

INCANDESCENT (INC) MED E26					
INC 100W (MAX) – A807, A810, M707, M710, M710S, DS07			*IMPORTANT – FOR INCANDESCENT (INC) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT. EXAMPLE: / INC100W /		
OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
100WINC	100W	PER BULB SPECS	>90	120-277 VAC	N/A

***TWO MEDIUM BASE 100W MAX– (ONE PER SHADE)**

J – ACCESSORIES



GR7 7" WIRE GRILL

GR8 8" WIRE GRILL

GR10 10" WIRE GRILL