



BASELITE – DEEP BOWL – GU24 – SPECIFICATION



PROJECT NAME: _____ PROJECT TYPE: _____

NOTES: **BABA COMPLIANT**



*FOR A COMPLETE MODEL NUMBER, MAKE A SELECTION FROM THE DROP DOWNS BELOW. SKIP SECTIONS THAT DO NOT APPLY.

MODEL #

EXAMPLE: D610 41 E16 SQ ½" 43 32GU24 3K CDM120 PR3 GR10 44

A - SHADES

DEEP BOWL

D610 – 32GU24 (MAX)
D612 – 32GU24 (MAX)
D614 – 32GU24 (MAX)
D616 – 42GU24 (MAX)
D618 – 42GU24 (MAX)
D627 – 42GU24 (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)
 (*SEE NOTES FOR LIMITATIONS*)

14, 15, 16, 17, 18, 19P, 20P, 20PB, 20SB,
 21P, 22P, 23P, 38, 39, 40, 41, 41.5, 42, 43,
 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 57,
 58, 59, 60, 61, 62, 63, 64, 65, 66, 70, 71, 72,
 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84,
 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96,
 97, 98, 99, 100, MG.

C – MOUNTING OPTIONS

½" ARM EXTENSIONS

E1, E2, E2S, E3, E4, B1, E16, E17, E24, E27

¾" ARM EXTENSIONS

E3A, E4A, E5, E6, E7, E8, E9,
 E10, E11, E12, E13, B15, B15S,
 E19, E20, E21, E25

E14 - CREATE YOUR OWN

(BASELITE WILL TAKE YOUR SKETCH AND
 FABRICATE A CUSTOM ARM EXTENSION TO
 MEET YOUR NEEDS).

¾" WALL MOUNT

B13, WM13R, WM13X, B10, B11, B101

¾" WALL MOUNT

B9, B9C, B12, WM10, WM11, WM14X,
 WM15, WM35X, WM55X, WM60X,
 WM61X WM70X, WM71X

COMPACT FLUORESCENT CORD MOUNT

CFBLC, CFWHC, CFTCB, CFTCW, CFTCHB,
 CFTCHW, CFTLB, CFTLW, CFRCB, CFRCW
 CFRCHB, CFRCHW, CFFHB, CFFHW, CFHBLC,
 CFHWHC, CFCBLC, CFCWHC, CFCCHB, CFCCHW

STEM MOUNT

ST6, ST12, ST18, ST24, ST36, ST48, STXX

D – MOUNTING ADD-ONS

CF ADD-ONS

CFWTM, CFSLC, CFSTC

UNIVERSAL ADD-ONS

SQ ½", SQ ¾", FH ½", FH ¾", TRB ½", TRB ¾",
 SWL, LGSWL, CNK, INB, RINB

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)

GU24 BI-PIN BASE (GU24)

26W, 32W, 42W (MAX)

G – LED COLOR TEMP

NOT AVAILABLE

H – ELECTRICAL OPTION

(SEE PAGE 4 FOR DIMMING OPTION SPECIFICATIONS)

CDM120

CDM277

CDM120/277

I – GLASS OPTIONS

CL3, CL4, BL3, BL4, RE3, RE4, GR3, GR4, AH3,
 AH4, FR3, FR4, PR3, PR4, BA, BAX, BAF, PR8,
 PR8F, FN, OC

J – ACCESSORIES

GR10, GR12, GR14, GR16, GR18, GR27, REF,
 UGR, LGR10, LGR12, LGR14, LGR16, LGR18,
 LGR27, CRL10, CRL12, CRL14, CRL16, CRL18,
 FLE10, FLE12, FLE14, FLE16, FLE18, FLE27,
 FGR10, FGR12, FGR14, FGR16, FGR18,
 FGR27, GU-1, GU-2, WG-1, WG-2

K – ACCESSORY COLOR

SEE SECTION "B" FOR COLOR
 OPTIONS.

NOTES

- (1). FINISH OPTIONS 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
 - (2). FINISH OPTIONS 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
 - (3). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
 - (4). FINISH OPTIONS FOR SHADES ≤ 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES > 10" IN DIAMETER ARE WHITE ON THE INSIDE.
 - (5). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
- *ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWMT, CFWTM, ECT.).
- *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).
- *ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.
- *FIXTURE DIMENSIONS MAY VARY ± 0.25.
- *CORD AND CANOPY COME IN THE SAME COLOR.



D610 H-10" W-10"

D612 H-10.5" W-12"

D614 H-13" W-14"

D616 H-14" W-16"



D618 H-16" W-18"


D627 H-17" W-27"



C - MOUNTING OPTIONS


1/2" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

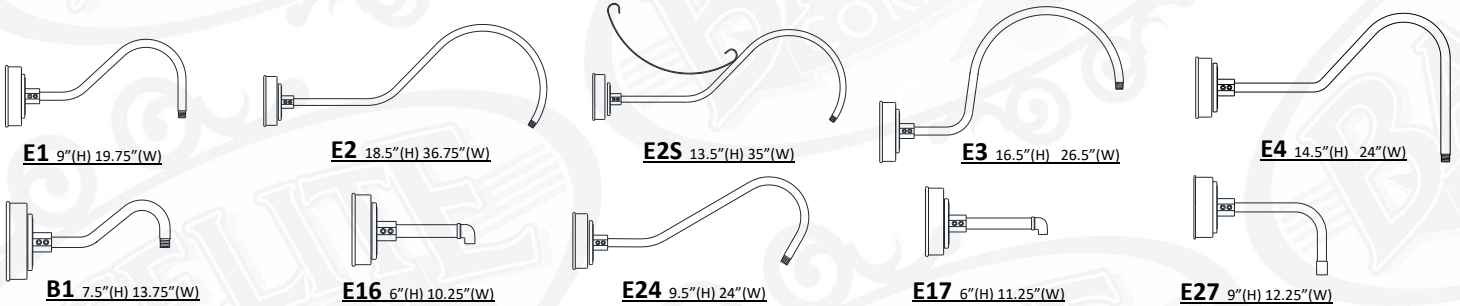


3/4" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

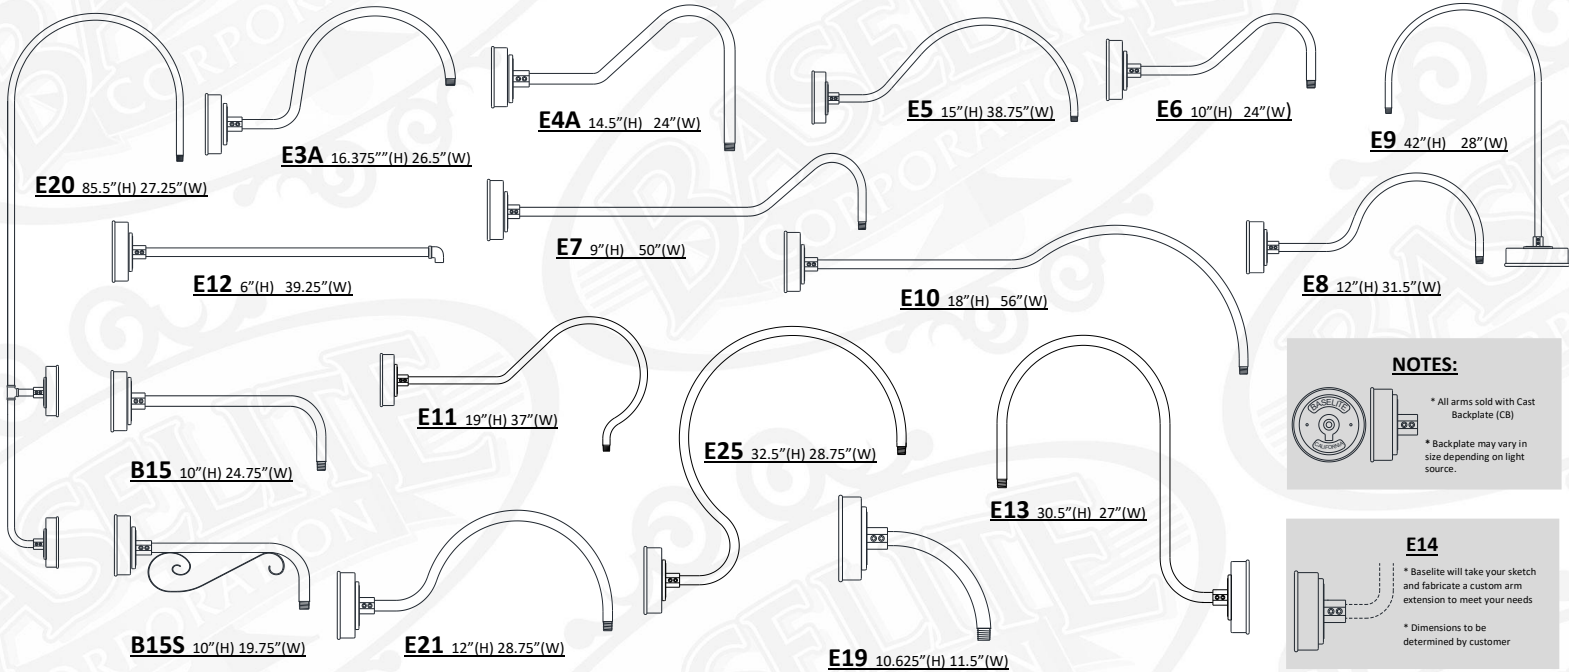


1/2" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED

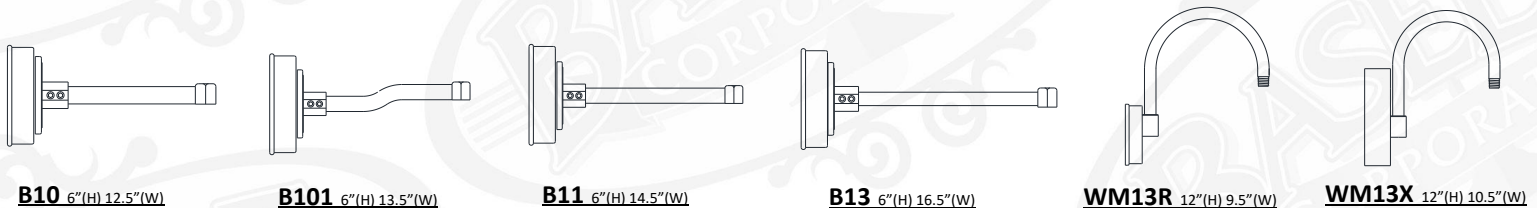

3/4" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED

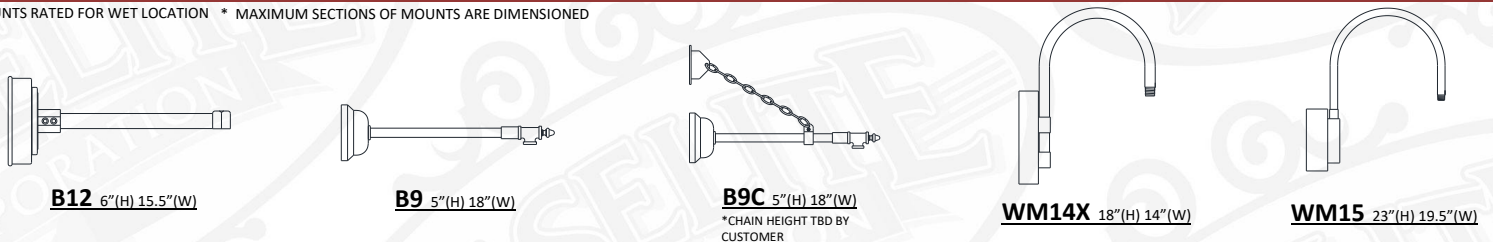



C - MOUNTING OPTIONS (CONTINUED)

3/4" WALL MOUNTS


*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED




WM35X 26"(H) 22"(W)




WM55X 19"(H) 27"(W)




WM60X 18"(H) 22"(W)



WM61X 18"(H) 22"(W)




WM70X 18"(H) 22"(W)



WM71X 18"(H) 22"(W)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

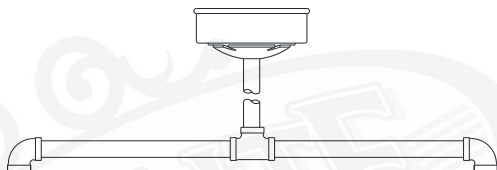

DP24 DOUBLE PENDANT 20"(H) 24"(W)

*DP24 COMES STANDARD WITH CFSTC AND ST18



ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM

(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)

*CANOPY NOT INCLUDED, ADD IN SECTION D

* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST



SC24 SCROLL STEM 33"(H) 26"(W)

*SC24 COMES STANDARD WITH CFSTC

CORD MOUNTS

FOR LED & GU24 BASE OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY. *CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: 4" (H) 5.5" (W) *CORD AND CANOPY COME IN THE SAME COLOR.



CFBLC 8' BLACK CORD

CFWHC 8' WHITE CORD



CFTCB 8' BLACK CORD, CABLE, and LOOP

CFTCW 8' WHITE CORD, CABLE, and LOOP



CFCHB 8' BLACK CORD, 3' CHAIN, and LOOP

CFCHW 8' WHITE CORD, 3' CHAIN, and LOOP



CFRCHB 8' BLACK CORD, CABLE, and LOOP

CFRCW 8' WHITE CORD, CABLE, and LOOP



CFRCHB 8' BLACK CORD, 3' CHAIN, and LOOP

CFRCHW 8' WHITE CORD, 3' CHAIN, and LOOP



CFCHB 8' BLACK CORD, 3' CHAIN, and LOOP

CFCHW 8' WHITE CORD, 3' CHAIN, and LOOP

* Loop may vary due to shade style




CFFHB 8' BLACK CORD WITH FLAT HUB

CFFHW 8' WHITE CORD WITH FLAT HUB



CFCBLC 8' BLACK CORD and CABLE

CFCWHC 8' WHITE CORD and CABLE



NOTES:

*DISTANCE TO LAMP (CF) 10"

*All compact fluorescent and LED housings may vary in size according to light source chosen.



BASELITE RLM CATALOG

PROJECT NAME: _____
PROJECT TYPE: _____

I – GLASS OPTIONS

NOTE : GLASS IS HEAT REISITANCE BOROSILICATE. *TEMPERED GLASS AVAILABLE UPON REQUEST. CONTANCT YOUR LOCAL SALES REPRESENTATIVE FOR INFORMATION OR CALL FACTORY FOR QUESTIONS.



CL3 3" CLEAR GLASS

CL4 4" CLEAR GLASS



PR3 3" PRISMATIC GLASS

PR4 4" PRISMATIC GLASS



RE3 3" RED GLASS

RE4 4" RED GLASS



BL3 3" BLUE GLASS

BL4 4" BLUE GLASS



FR3 3" FROSTED GLASS

FR4 4" FROSTED GLASS




AH3 3" AMBER HYDE GLASS

AH4 4" AMBER HYDE GLASS



GR3 3" GREEN GLASS

GR4 4" GREEN GLASS



GLASS – DIMENSIONS

3" GLASS

Diameter 3.34"
Height 6.93"
Fitter 3.29"

4" GLASS

Diameter 4.34"
Height 8.37"
Fitter 4.29"

GLASS – MAX WATTAGE
3" GLASS – 100W INC / LED12W
4" GLASS – 200W INC / LED25W



BA 6" OPAL BALL
(100W INC MAX/LED12W)



BAX 9" CLEAR GLOBE
BAF 9" FROSTED GLOBE
(200W INC MAX/LED25W)



FN 8" CLEAR TEXTURED GLOBE
(150W INC MAX/LED25W)



BA7 7" CLEAR GLOBE
BA7F 7" FROSTED GLOBE
(100W INC MAX/LED25W)




PR8 8" PRISMATIC
PR8F 8" PRISMATIC FROSTED
(200W INC MAX/LED45W)



OC 8" OPAL TAPERED GLOBE
(60W INC MAX/LED25W)

J – ACCESSORIES




GR12 12" WIRE GRILL

GR14 14" WIRE GRILL

GR16 16" WIRE GRILL

GR18 18" WIRE GRILL

GR20 20" WIRE GRILL




LGR12 12" LOUVERED GRILL

LGR14 14" LOUVERED GRILL

LGR16 16" LOUVERED GRILL

LGR18 18" LOUVERED GRILL

LGR20 20" LOUVERED GRILL




FGR12 12" FLAT GRILL

FGR14 14" FLAT GRILL

FGR16 16" FLAT GRILL

FGR18 18" FLAT GRILL

FGR20 20" FLAT GRILL




CRL12 12" CURVED POLYCARB LENSE

CRL14 14" CURVED POLYCARB LENSE

CRL16 16" CURVED POLYCARB LENSE

CRL18 18" CURVED POLYCARB LENSE




FLE12 12" FLAT CLEAR LENSE

FLE14 14" FLAT CLEAR LENSE

FLE16 16" FLAT CLEAR LENSE

FLE18 18" FLAT CLEAR LENSE


FLE20 20" FLAT CLEAR LENSE




REF 9.5" DIAMETER REFRACTOR




UGR U- WIRE GUARD




WG-1 WIRE GUARD



WG-2 WIRE GUARD
Available for shades 12" or higher



GU-1 CAST ALUMINUM GUARD



GU-2 CAST ALUMINUM GUARD
Available for shades 12" or higher