



BASELITE – YARD LITE – MED – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

NOTES: **BABA COMPLIANT**

*FOR A COMPLETE MODEL NUMBER, MAKE A SELECTION FROM THE DROP DOWNS BELOW. SKIP SECTIONS THAT DO NOT APPLY.

MODEL

EXAMPLE: YL12 41 E16 SQ 1/2" 43 100W PR3 GR12 44

A - SHADES

YARD LITES

YL12 – 100W (MAX)
YL14 – 100W (MAX)
YL16 – 150W (MAX)
YP12 – 100W (MAX)
YP14 – 100W (MAX)
YP16 – 150W (MAX)
CYP12 – 100W (MAX)
CYP14 – 100W (MAX)
CYP16 – 150W (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)
 (*SEE NOTES FOR LIMITATIONS*)

14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB,
 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40,
 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51,
 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64,
 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79,
 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91,
 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C – MOUNTING OPTIONS

1/2" ARM EXTENSIONS

E1, E2, E3, E4, B1, E16, E17, E27

3/4" ARM EXTENSIONS

E3A, E4A, E5, E6, E7, E8, E9,
 E10, E11, E12, E13, B15, B15S,
 E19, E20, E21, *E22, E25

E14 - CREATE YOUR OWN

(BASELITE WILL TAKE YOUR SKETCH AND
 FABRICATE A CUSTOM ARM EXTENSION TO
 MEET YOUR NEEDS).

1/2" WALL MOUNT

B13, WM13, WM13R, WM13X, B10,
 B11, B101

3/4" WALL MOUNT

B9, B9C, B12, WM14, WM14X, WM15,
 WM18, WM35, WM35X, WM55,
 WM55X, WM60, WM60X, WM61,
 WM61X, WM70, WM70X, WM71,
 WM71X

CORD MOUNT (INC)

BLC, WHC, TCB, TCW, TCHB, TCHW, TLB,
 TLW, TLW, RCB, RCW, RCHB, RCHW,
 FHB, FHW, CBLC, CWHC, CHB, CHW

STEM MOUNT

ST6, ST12, ST18, ST24, ST36, ST48, STXX

D – MOUNTING ADD-ONS

INC ADD-ONS

CB1/2", CB3/4", CBC1/2", CBC3/4", SLC1/2",
 SLC3/4" STC1/2"

UNIVERSAL ADD-ONS

SQ 1/2", SQ 3/4", FH 1/2", FH 3/4", TRB 1/2", TRB 3/4",
 SWL, LGSWL, CNK, INB, RINB

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)

MEDIUM BASE (MED) E26

100W, 150W

G – LED COLOR TEMP

NOT AVAILABLE

H – ELECTRICAL OPTION

NOT AVAILABLE

I – GLASS OPTIONS

CL3, CL4, CLT3, CLT4, BL3, BL4, RE3, RE4,
 GR3, GR4, AH3, AH4, FR3, FR4, FRT3, FRT4,
 PR3, PR4, BA, BAX, BAF, PR8, PR8F, FN, OC

J – ACCESSORIES

GR14, GR16, REF, UGR, LGR14, LGR16,
 CRL14, CRL16, FLE14, FLE16, FGR14, FGR16,
 GU-1, GU-2, WG-1, WG-2


K – ACCESSORY COLOR

SEE SECTION "B" FOR COLOR
 OPTIONS.

NOTES

- (1). FINISH OPTIONS 20, 21, 22, 23 ARE FOR SOLID BRASS FIXTURES ONLY.
 - (2). FINISH OPTIONS 19, 21, 22, 23, 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
 - (3). FINISH OPTIONS 19, 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
 - (4). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
 - (5). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
- *ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
- *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE.
 (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).
- *ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.
- *FIXTURE DIMENSIONS MAY VARY ±0.25.
- *CORD AND CANOPY COME IN THE SAME COLOR.
- *E22 3/4" ARM EXTENSION FOR YL14 AND YL16 ONLY

SHADE DIMENSIONS

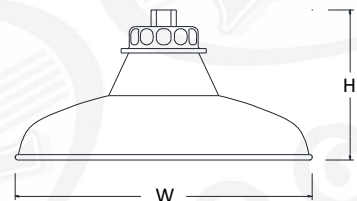

YP12 H-6.5" W-12.5"

YP14 H-7.5" W-14"


YP16 H-8.5" W-16"



YL12 H-6" W-12.5"

YL14 H-7" W-14"

YL16 H-8" W-16"

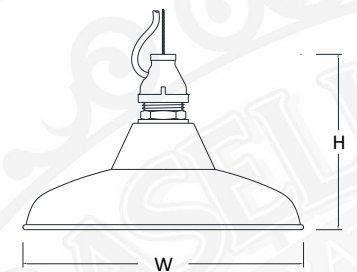

CYP12 H-7.75" W-12.5"

CYP14 H-8.75" W-14"

CYP16 H-9.75" W-16"




C - MOUNTING OPTIONS

1/2" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED *E27 CUSTOM BACK PLATE - 8" (H) .5" (W)




E1 8.5"(H) 18"(W)

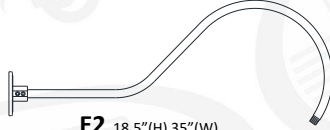

E2 18.5"(H) 35"(W)



E3 16"(H) 24.75"(W)

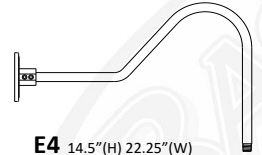


E4 14.5"(H) 22.25"(W)




B1 6.75"(H) 12"(W)



E16 4.75"(H) 8.5"(W)




E17 4.75"(H) 9.5"(W)




E27 10.25"(H) 10.5"(W)

3/4" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

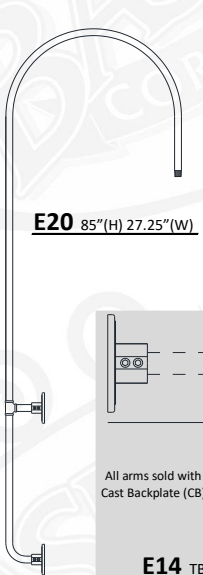

E20 85"(H) 27.25"(W)



E3A 16"(H) 24.75"(W)




E4A 14.5"(H) 22.25"(W)




E5 15"(H) 37"(W)




E6 9"(H) 22.25"(W)




E9 40.25"(H) 27.5"(W)



E12 6"(H) 37.5"(W)





E7 9"(H) 48.25"(W)




E8 12"(H) 29.75"(W)




E13 30"(H) 25.25"(W)

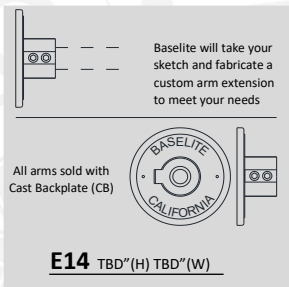


B15 9.5"(H) 23"(W)



E10 18"(H) 54.25"(W)



E11 19"(H) 35"(W)



E25 32"(H) 27"(W)



B15S 9.5"(H) 18"(W)



E21 12"(H) 27"(W)



E22 4.75"(H) 14"(W)
*YL14 & YL16 ONLY



E19 10"(H) 10"(W)

1/2" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



B10 4.75"(H) 11"(W)




B101 4.75"(H) 12"(W)




B11 4.75"(H) 13"(W)




B13 4.75"(H) 15"(W)



WM13 12"(H) 9.5"(W)



WM13R 12"(H) 9.5"(W)



WM13X 12"(H) 10.5"(W)

3/4" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED




B12 4.75"(H) 14"(W)



B9 5"(H) 18"(W)



B9C 5"(H) 18"(W)
*CHAIN HEIGHT TBD BY CUSTOMER



WM14 18"(H) 12"(W)



WM14X 18"(H) 14"(W)



WM15 23"(H) 19.5"(W)



C - MOUNTING OPTIONS (CONTINUED)

3/4" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



WM18 30"(H) 20"(W)




WM35 26"(H) 18.25"(W)




WM35X 26"(H) 22"(W)




WM55 19"(H) 25.5"(W)



WM55X 19"(H) 27"(W)




WM60 18"(H) 20"(W)




WM60X 18"(H) 22"(W)




WM61 18"(H) 20"(W)




WM61X 18"(H) 22"(W)




WM70 18"(H) 20"(W)



WM70X 18"(H) 22"(W)




WM71 18"(H) 20"(W)



WM71X 18"(H) 22"(W)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

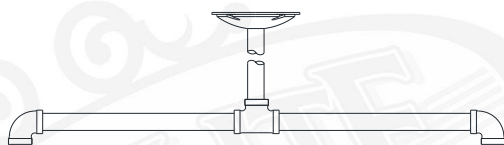

DP24 DOUBLE PENDANT 20"(H) 24"(W)

*DP24 COMES STANDARD WITH STC AND ST18



ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)

*CANOPY NOT INCLUDED, ADD IN SECTION D
* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST



SC24 SCROLL STEM 33"(H) 24"(W)

*SC24 COMES STANDARD WITH STC


CORD MOUNTS

*INCANDESCENT MAX WATTAGE 150 WATT. CALL FACTORY FOR HIGHER WATTAGES. LOOPS, CABLES, AND CHAINS AVAILABLE ONLY FOR INCANDESCENT*CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: .625" (H) 5.25" (W)
*CORD AND CANOPY COME IN THE SAME COLOR.



BLC 8' BLACK CORD

WHC 8' WHITE CORD



TCB 8' BLACK CORD, CABLE, and LOOP

TCW 8' WHITE CORD, CABLE, and LOOP




TCHB 8' BLACK CORD, 3' CHAIN, and LOOP

TCHW 8' WHITE CORD, 3' CHAIN, and LOOP



TLB 8' BLACK TELEPHONE CORD AND CABLE

TLW 8' WHITE TELEPHONE CORD AND CABLE



RCB 8' BLACK CORD, CABLE, and LOOP

RCW 8' WHITE CORD, CABLE, and LOOP



RCHB 8' BLACK CORD, 3' CHAIN, and LOOP

RCHW 8' WHITE CORD, 3' CHAIN, and LOOP



FHB 8' BLACK CORD WITH FLAT HUB

FHW 8' WHITE CORD WITH FLAT HUB



CBLC 8' BLACK CORD and CABLE

CWLW 8' WHITE CORD and CABLE



CHB 8' BLACK CORD, 3' CHAIN, and LOOP

CHW 8' WHITE CORD, 3' CHAIN, and LOOP


* Loop may vary due to shade style



D - MOUNTING ADD-ONS

INCANDESCENT ARM ADD-ONS

* FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.

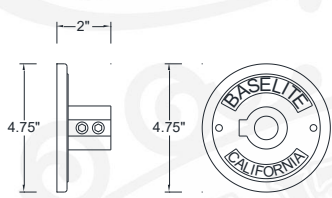


CB 1/2" CAST ALUMINUM BACKPLATE 1/2 NPT

CB 3/4" CAST ALUMINUM BACKPLATE 3/4 NPT

CBC 1/2" 1/2" BACKPLATE COVER

CBC 3/4" 3/4" BACKPLATE COVER

* Includes slip ring to hold 1/2" or 3/4" arm extension in place



SLC 1/2" SLOPE CEILING CANOPY 1/2"

SLC 3/4" SLOPE CEILING CANOPY 3/4"

*(Slopes To 20 Degrees)



STC 1/2" 1/2" STEM MOUNT CANOPY

UNIVERSAL STEM AND ARM ADD-ONS


* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:

MODEL #: -/-/-LWTM, TRB 1/2", LGSWL-/-/-/-/-/-/-/-/-
A B C D E F G H I J K




CNK CANOPY For MULTIPLE FIXTURES

*CNK dimensions vary on number of fixtures applied




LGSWL 1/2" NPT SWIVEL

For all shades greater than 7" wide in diameter



FH 1/2" FLAT HUB 1/2"

FH 3/4" FLAT HUB 3/4"

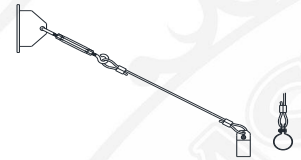

TRB 1/2"- 4' CABLE SUPPORT

TRB 3/4"- 4' CABLE SUPPORT

F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS.

MEDIUM BASE (MED) E26

MED 100W (MAX)- YL12, YL14, YP12, YP14, CYP12 CYP14
MED 150W (MAX)- YL16, YP16, CYP16

***IMPORTANT** – FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT. EXAMPLE: / MED150W /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
MED100W	100W	PER BULB SPECS	>90	120-277 VAC	N/A
MED150W	150W	PER BULB SPECS	>90	120-277 VAC	N/A

*FIXTURE WATTAGE CAN BE DE-RATED TO MEET CODE COMPLIANCE "XXMED" – XX = DESIRED WATTAGE RATING BELOW MAX.



BASELITE RLM CATALOG

PROJECT NAME: _____
PROJECT TYPE: _____

I – GLASS OPTIONS

NOTE : GLASS IS HEAT REISSTANCE BOROSILICATE. *TEMPERD GLASS AVAILABLE UPON REQUEST. CONTANCT YOUR LOCAL SALES REPRESENTATIVE FOR INFORMATION OR CALL FACTORY FOR QUESTIONS.



CL3 3" CLEAR GLASS
CL4 4" CLEAR GLASS



PR3 3" PRISMATIC GLASS
PR4 4" PRISMATIC GLASS



RE3 3" RED GLASS
RE4 4" RED GLASS



BL3 3" BLUE GLASS
BL4 4" BLUE GLASS




FR3 3" FROSTED GLASS
FR4 4" FROSTED GLASS



AH3 3" AMBER HYDE GLASS
AH4 4" AMBER HYDE GLASS



GR3 3" GREEN GLASS
GR4 4" GREEN GLASS



GLASS – DIMENSIONS	
3" GLASS	
Diameter	3.34"
Height	6.93"
Fitter	3.29"
4" GLASS	
Diameter	4.34"
Height	8.37"
Fitter	4.29"

GLASS – MAX WATTAGE
3" GLASS – 100W INC / LED25W
4" GLASS – 200W INC / LED25W



BA 6" OPAL BALL
(100W INC MAX/LED12W)



BAX 9" CLEAR GLOBE
BAF 9" FROSTED GLOBE
(200W INC MAX/LED25W)



FN 8" CLEAR TEXTURED GLOBE
(150W INC MAX/LED25W)



BA7 7" CLEAR GLOBE
BA7F 7" FROSTED GLOBE
(100W INC MAX/LED25W)




PR8 8" PRISMATIC
PR8F 8" PRISMATIC FROSTED
(200W INC MAX/LED45W)




OC 8" OPAL TAPERED GLOBE
(60W INC MAX/LED25W)


J – ACCESSORIES



GR14 14" WIRE GRILL
GR16 16" WIRE GRILL




LGR14 14" LOUVERED GRILL
LGR16 16" LOUVERED GRILL




FGR14 14" FLAT GRILL
FGR16 16" FLAT GRILL



CRL14 14" CURVED POLYCARB LENS
CRL16 16" CURVED POLYCARB LENS




FLE14 14" FLAT CLEAR LENS
FLE16 16" FLAT CLEAR LENS




REF 9.5" DIAMETER REFRACTOR




UGR U- WIRE GUARD




WG-1 WIRE GUARD



WG-2 WIRE GUARD



GU-1 CAST ALUMINUM GUARD



GU-2 CAST ALUMINUM GUARD