





BASELITE - CYLINDER – GU24– SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

NOTES: **BABA COMPLIANT**

*FOR A COMPLETE MODEL NUMBER, MAKE A SELECTION FROM THE DROP DOWNS BELOW. SKIP SECTIONS THAT DO NOT APPLY.

MODEL #

EXAMPLE: CY48 41 ST18 SLC 41 32GU24 CDM120

A - SHADES

CYLINDERS

CY48 - 32W (MAX)
CY510 - 42W (MAX)
CY816 - 57W (MAX)
CY618 - 42W (MAX)
CY620 - 42W (MAX)
CYB510 - 42W (MAX)
CYB816 - 57W (MAX)
CYBU510 - 2-26W (MAX)
CYBU816 - 42W (MAX)
CG512 - 42W (MAX)
PD2012 - 42W (MAX)
SD2012 - 42W (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)
 (*SEE NOTES FOR LIMITATIONS*)

14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB,
 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40,
 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51,
 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64,
 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79,
 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91,
 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C – MOUNTING OPTIONS

CORD MOUNT

CFMFCB, CFMCW, CFMTCB, CFMTCW,
 CFMTCHB, CFMTCHW, CFMRCB, CFMRCW,
 CFMRCHB, CFMRCHW, CFMFHB, CFMFHW,
 CFMCBLC, CFMCWLC, CFMCHB, CFMCHW

STEM MOUNT

ST6, ST12, ST18, ST24, ST36, ST48, STXX

D – MOUNTING ADD-ONS

CF ADD-ONS

CFSLC, CFSTC

UNIVERSAL ADD-ONS

FH ½", FH ¾", SWL, LGSWL, CNK

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 3 FOR WATTAGE LIMITATIONS)

GU24 BASE BI-PIN (GU24)

26W, 32W, 42W

G – LED COLOR TEMP

NOT AVAILABLE

H – ELECTRICAL OPTION

(SEE PAGE 3 FOR DIMMING OPTION SPECIFICATIONS)

CDM120

CDM277

CDM120/277

I – GLASS OPTIONS

NOT AVAILABLE

J – ACCESSORIES

NOT AVAILABLE

K – ACCESSORY COLOR

NOT AVAILABLE

NOTES


- (1). FINISH OPTIONS 20, 21, 22, 23 ARE FOR SOLID BRASS FIXTURES ONLY.
- (2). FINISH OPTIONS 19, 21, 22, 23, 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
- (3). FINISH OPTIONS 19, 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- (4). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- (5). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
 *ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
 *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).
 *ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.
 *FIXTURE DIMENSIONS MAY VARY ±0.25.
 *CORD AND CANOPY COME IN THE SAME COLOR.



CY48 H - 8" W - 4"

CY510 H - 10" W - 5"

CY816 H - 16" W - 8"




CYB510 H-10" W-5" P-9"

CYB816 H-16" W-8" P-12"

*FIXTURES COME AS SHOWN

*ALL MOUNTING OPTIONS DO NOT APPLY

*WET LOCATION RATED




CYBU510 H-10" W-5" P-9"

CYBU816 H-16" W-8" P-12"


*FIXTURES COME AS SHOWN

*ALL MOUNTING OPTIONS DO NOT APPLY


*WET LOCATION RATED



CG512 H-12" W-5"



SD2012 H-12" W-20"



PD2012 H-12" W-20"



CY618 H - 6" W - 18"


CY620 H - 6" W - 20"



C - MOUNTING OPTIONS

STEM MOUNTS

*STEMS RATED FOR WET AND DAMP LOCATION

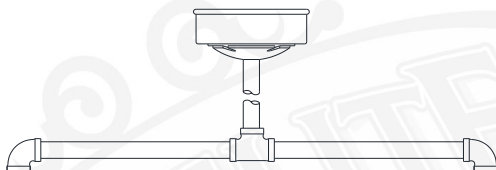

DP24 DOUBLE PENDANT 20"(H) 24"(W)
*DP24 COMES STANDARD WITH CFSTC AND ST18



ST(XX) STEM- 1/2" NPT
XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D
* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST




SC24 SCROLL STEM 33"(H) 26"(W)
*SC24 COMES STANDARD WITH CFSTC

CORD MOUNTS

*FOR LED & GU24 OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY. *CORDS RATED FOR DRY LOCATION. *CANOPY DIMENSIONS: 4" (H) 5.5" (W)
*CORD AND CANOPY COME IN THE SAME COLOR.



CFMCB 8' BLACK CORD
CFMCW 8' WHITE CORD



CFMTCB 8' BLACK CORD, CABLE, and LOOP
CFMTCW 8' WHITE CORD, CABLE, and LOOP



CFMTCHB 8' BLACK CORD, 3' CHAIN, and LOOP
CFMTCHW 8' WHITE CORD, 3' CHAIN, and LOOP



CFMRCB 8' BLACK CORD, CABLE, and LOOP
CFMRCW 8' WHITE CORD, CABLE, and LOOP



CFMRCHB 8' BLACK CORD, 3' CHAIN, and LOOP
CFMRCHW 8' WHITE CORD, 3' CHAIN, and LOOP




CFMCHB 8' BLACK CORD, 3' CHAIN, and LOOP
CFMCHW 8' WHITE CORD, 3' CHAIN, and LOOP
* Loop may vary due to shade style



CFMFHB 8' BLACK CORD WITH FLAT HUB
CFMFHW 8' WHITE CORD WITH FLAT HUB




CFMCBLC 8' BLACK CORD and CABLE
CFMCWHC 8' WHITE CORD and CABLE

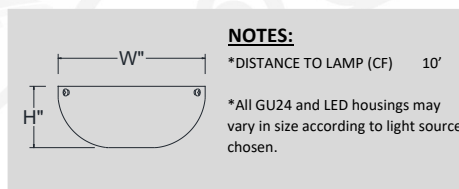


D - MOUNTING ADD-ONS

COMPACT FLUORESCENT STEM AND ARM ADD-ONS

* FOR LED & GU24 OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



CFSLC CF SLOPE CEILING CANOPY




CFSTC CF STEM MOUNT CANOPY





D - MOUNTING ADD-ONS (CONTINUED)

UNIVERSAL STEM AND ARM

* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:

MODEL #:
-/-/-/WTM, TRB 1/2", LGSWL/-/-/-/-/-/
A B C D E F G H I J K**CNK** CANOPY For MULTIPLE FIXTURES

*CNK dimensions vary on number of fixtures applied

**FH 1/2"** FLAT HUB 1/2"**FH 3/4"** FLAT HUB 3/4"**LGSWL** 1/2" NPT SWIVEL

For all shades greater than 7" wide in diameter

F - LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS.

GU24 BASE BI-PIN (GU24) FOR LED & CFL BULBS

2-26W(MAX) - CYBU510
26W, OR 32W(MAX) - CY48
26W, 32W, OR 42(MAX) - CY510, CYB510, CG512, PD2012, SD2012
26W, 32W 42, OR 57(MAX) - CY816, CYB816
2-26W, 32W, OR 42(MAX) - CY618, CY620, CYBU816

***IMPORTANT** - FOR GU24 BASE BI-PIN (GU24) LIGHT SOURCE, FIXTURES ARE LIMITED DUE TO THE SIZE OF THE SHADE. PLEASE SEE THE CHART TO THE LEFT TO SEE WHAT WATTAGE IS COMPARABLE FOR EACH FIXTURE WHEN ORDERING. EXAMPLE: / 42GU24 /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
26GU24	26W	PER BULB SPECS	>90	120-277 VAC	0-10V
32GU24	32W	PER BULB SPECS	>90	120-277 VAC	0-10V
42GU24	42W	PER BULB SPECS	>90	120-277 VAC	0-10V
57GU24	57W	PER BULB SPECS	>90	120-277 VAC	0-10V

*FIXTURE WATTAGE CAN BE DE-RATED TO MEET CODE COMPLIANCE "CFXXW" - XX = DESIRED WATTAGE RATING BELOW MAX.

H - ELECTRICAL OPTION

MOST BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES. PLEASE SEE NOTES BELOW AND FOR FURTHER DETAILS CONTACT THE FACTORY. FOR DIMMING BALLAST OPTION PLEASE CHOOSE MARK X OR MARK VII, SO RESTRICTIONS APPLY DUE TO THE SIZE OF THE BALLAST AND FIXTURE.

GU24 DIMMING OPTIONS

PROVIDED WITH ADVANCE TRANSFORMER, PLEASE CHOOSE MARK 10 OR MARK 7 WITH SPECIFIED VOLTAGE FROM THE LIST BELOW. CONTACT BALLAST MANUFACTURER FOR SPECIFICATIONS.

CDM7-120/277 - ADVANCE MARK 7 0-10v ELECTRICAL BALLST - 120/277 VOLT**CDM10-120** - ADVANCE MARK 10 TRI-ELV ELECTRICAL BALLST - 120 VOLT**CDM10-277** - ADVANCE MARK 10 TRI-ELV ELECTRICAL BALLST - 277 VOLT