




FARMHOUSE LIGHTING

SPECIFICATION SHEET



WF514.78-20W.BLC.MED60W

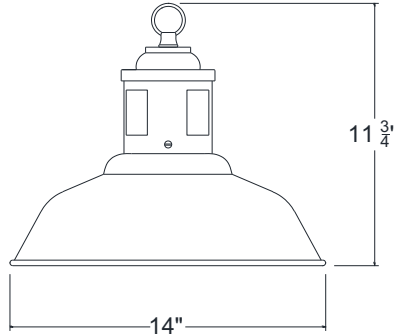

MODEL: WF514

PREPARED BY: _____

TYPE: _____

JOB NAME: _____

DATE: _____

CERTIFICATION: **UL LISTED** **BABA COMPLIANT**

FINISH – Five stage pretreatment process, coated with a lead free TGI C polyester powder coat finish. White is standard inside reflectors, some finish options excluded. See color chart below for color options (unless specified). Some finish options are not available for certain fixtures. Custom colors and Marine options are available upon request.

LAMP HOLDERS – Medium Base (E26) – LED or incandescent bulb can be used. Porcelain socket, copper shell with nickel plate, rated 250V, 660W. **LED (dedicated)** – Designed to last with up to 50,000 hours, depending on installation location and ambient temperature.

MOUNTING – Available with cord, chain, stem or arm mount. Cord mount is supplies with 96" of cord. Stem mount is supplied with 1/2" or 3/4" hub and 18" stem, unless specified otherwise. Stem supplied with 48" leads. Chain supplied with 36" length.

REFLECTOR – Shade spun from a heavy gauge aluminum 1100-0.

MODEL #	FINISH	LIGHT SOURCE				MOUNTING OPTIONS	ACCESSORIES
		MED	CF *	MH*	LED		
WF514	SEE THE FINISH OPTION CHART ON THE WEBSITE AT THE BOTTOM OF THE PAGE UNDER "PRODUCT INFORMATION".	100W	N/A	N/A	25W	CHAIN & CORD, CORD MOUNT, STEM MOUNT, ARM EXTENSION	GR14, FGR14, LGR14, FLE14, UGR, CL3, PR3, CG1, WG1

* same finish color inside and out.

* remote ballast / driver.

.SUBJECT TO MODIFICATION WITHOUT NOTICE.



BASELITE CORPORATION
12260 EAST END AVE.
CHINO, CA 91710

PH: 877-999-1990
WEB: WWW.BASELITE.COM
EMAIL: SALES@BASELITE.COM

