



BASELITE - 4PE3 - 4HPE3 - 4DPE3 - CF - SPEC SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

| | | | | | | | | | | | |
|----------|------------|---------|-----------|----------|---------|--------------|--------|--------|----------|----------|---------|
| MODEL # | / | / | / | / | / | / | / | / | / | / | / |
| EXAMPLE: | A 4HPE3 | B 53 | C ST36 | D STC | E 53 | F 100WINC | G - | H - | I AH3 | J CG1 | K 53 |

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES: **BABA COMPLIANT**



4DPE3/61/ST36/STC/61/100WINC/CL3/CG1/61

A - SHADES

4PE3 SERIES
4PE3 - 32WCF (MAX), (3" GLASS), (3" GUARD)
4HPE3 SERIES
4HPE3 - 32WCF (MAX), (3" GLASS), (3" GUARD)
4DPE3 SERIES
4DPE3 - 32WCF (MAX), (3" GLASS), (3" GUARD)

B - FINISH OPTIONS

(SEE NOTES FOR LIMITATIONS)
 (SEE WEBSITE FOR SWATCH COLORS)
 20, 21, 22, 23, 40, 41, 41.5, 42, 43, 44, 45,
 46, 48, 49, 50, 51, 52, 53, 54, 55, 59, 60,
 61, 62, 63, 70, 71, 72, 73

C - MOUNTING OPTIONS

* ALL FIXTURES COMES AS IS.
 NO OTHER MOUNTING APPLIES
STEM MOUNT
 ST6, ST12, ST18, ST24, ST36, ST48, STXX

D - MOUNTING ADD-ONS

CF ADD-ONS
 CFSLC, CFSTC

E - MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F - LIGHT SOURCE

(SEE PAGE 2 FOR WATTAGE LIMITATIONS)
COMPACT FLUORESCENT (CF) (GU24 BASE)
 26W, 32W

G - LED COLOR TEMP

NOT AVAILABLE

H - ELECTRICAL OPTION

(SEE PAGE 2 FOR DIMMING OPTION SPECIFICATIONS)
CDM120
CDM277
CDM120/277

I - GLASS OPTIONS

3" GLASS
 (AVAILABLE FOR 4PE3, 4HPE3, 4DPE3)
 CL3, CLT3, BL3, RE3, GR3,
 AH3, FR3, FRT3, PR3

J - ACCESSORIES


3" GUARDS
 (AVAILABLE FOR 4PE3, 4HPE3, 4DPE3)
 CG1, WG1

K - ACCESSORY COLOR


SEE SECTION "B" FOR COLOR OPTIONS.

NOTES


- (1). FINISH OPTIONS 40, 49, 54, 61, 62, 63, 70, 71, 72, 73 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
 - (2). FINISH OPTIONS FOR SHADES ≤ 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES > 10" IN DIAMETER ARE WHITE ON THE INSIDE.
 - (3). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- *ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
 - *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).
 - *ALL FIXTURES MOUNT TO A RECESSED 4-0 JUNCTION BOX.
 - *FIXTURE DIMENSIONS MAY VARY ± 0.25.
 - *RATED FOR WET LOCATION.

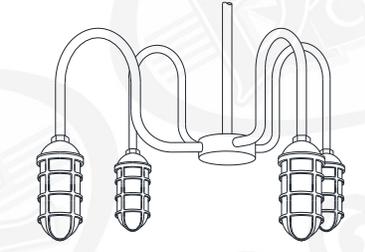

4PE3 H - 18" W - 34"
3" GLASS & 3" GUARD AVAILABLE FOR 4PE3

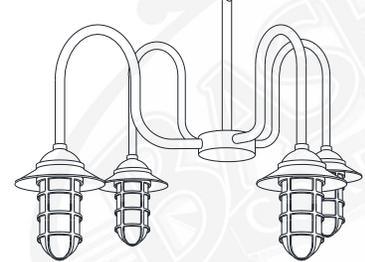

4HPE3 H - 18" W - 38"
3" GLASS & 3" GUARD AVAILABLE FOR 4HPE3

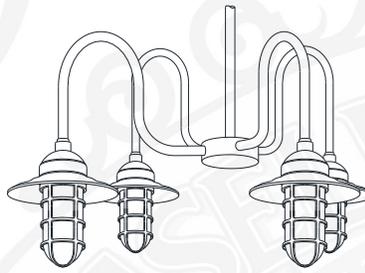

4DPE3 H - 18" W - 40"
3" GLASS & 3" GUARD AVAILABLE FOR 4DPE3



C - MOUNTING OPTIONS

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION




ST(XX) - STEM MOUNT- 1/2" NPT

XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D
* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST


D - MOUNTING ADD-ONS

STEM AND ARM ADD-ONS

* FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



CFSLC CF SLOPE CEILING CANOPY



CFSTC CF STEM MOUNT CANOPY

F - LIGHT SOURCE

COMPACT FLUORESCENT (CF) (GU24 BASE)

CF 26W, 32W(MAX) - 4PE3, 4HPE3, 4DPE3

***IMPORTANT - FOR COMPACT FLUORESCENT (CF) LIGHT SOURCE, FIXTURES ARE LIMITED DUE TO THE SIZE OF THE SHADE. PLEASE SEE THE CHART TO THE LEFT TO SEE WHAT WATTAGE IS COMPARABLE FOR EACH FIXTURE WHEN ORDERING. EXAMPLE: /CF42W /**

| OPTION | WATTAGE | LUMENS | CRI | VOLTAGE | DIMMING |
|--------|---------|----------------|-----|-------------|-----------------|
| CF26W | 26W | PER BULB SPECS | >90 | 120-277 VAC | See section "H" |
| CF32W | 32W | PER BULB SPECS | >90 | 120-277 VAC | See section "H" |

H - ELECTRICAL OPTION

MOST BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES. PLEASE SEE NOTES BELOW AND FOR FURTHER DETAILS CONTACT THE FACTORY. FOR DIMMING BALLAST OPTION, PLEASE CHOOSE MARK X OR MARK VII, SO RESTRICTIONS APPLY DUE TO THE SIZE OF THE BALLAST AND FIXTURE.

COMPACT FLUORESCENT DIMMING OPTIONS

PROVIDED WITH ADVANCE TRANSFORMER, PLEASE CHOOSE MARK 10 OR MARK 7 WITH SPECIFIED VOLTAGE FROM THE LIST BELOW. CONTACT BALLAST MANUFACTURER FOR SPECIFICATIONS.

- CDM7-120/277** - ADVANCE MARK 7 0-10v ELECTRICAL BALLST - 120/277 VOLT
- CDM10-120** - ADVANCE MARK 10 ELECTRICAL BALLST - 120 VOLT
- CDM10-277** - ADVANCE MARK 10 ELECTRICAL BALLST - 277 VOLT



I – GLASS OPTIONS

*NOTE : GLASS IS HEAT RESISTANCE BOROSILICATE. *TEMPERD GLASS AVAILABLE UPON REQUEST. CONTACT YOUR LOCAL SALES REPRESENTATIVE FOR INFORMATION OR CALL FACTORY FOR QUESTIONS.
* 3" GUARDS AVAILIABLE FOR 4PE3, 4HPE3, 4DPE3



CL3 3" CLEAR GLASS



PR3 3" PRISMATIC GLASS



RE3 3" RED GLASS



BL3 3" BLUE GLASS



FR3 3" FROSTED GLASS




AH3 3" AMBER HYDE GLASS



GR3 3" GREEN GLASS


| GLASS – DIMENSIONS | |
|--------------------|-------|
| 3" GLASS | |
| Diameter | 3.34" |
| Height | 6.93" |
| Fitter | 3.29" |




| |
|------------------------------|
| GLASS – MAX WATTAGE |
| 3" GLASS – 100W INC / LED25W |

J – ACCESSORIES

* 3" GUARDS AVAILIABLE FOR 4PE3, 4HPE3, 4DPE3



WG1 3" WIRE GUARD



CG1 3" CAST GUARD