



BASELITE – K SERIES – MR16 – SPEC SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL # / / / / / / X / X / X / X / X

EXAMPLE: A B C D E F G H I J K
K2 41 E16 CB ½" 43 MR16-35W - - - - -

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES: **BABA COMPLIANT**



K2/61/E32/ CB½"/61/MR16-50W

A - SHADES

K SERIES

K1 - 50W (MAX) – BULB PROVIDED (SEE SPECS)

K2 - 50W (MAX) – BULB PROVIDED (SEE SPECS)

B - FINISH OPTIONS

(*SEE NOTES FOR LIMITATIONS*)

(SEE WEBSITE FOR SWATCH COLORS)

41, 42, 43, 44, 45, 46, 48, 49, 50, 51,
52, 53, 54, 55, 59, 60, 61, 62, 63, 74,
81, 87, 97

C – MOUNTING OPTIONS

½" ARM EXTENSIONS

E31, E32, E33, E34, E35,
E36, E37

¾" ARM EXTENSIONS

E38, E39

E14 - CREATE YOUR OWN

(BASELITE WILL TAKE YOUR SKETCH AND
FABRICATE A CUSTOM ARM EXTENSION TO
MEET YOUR NEEDS).

D – MOUNTING ADD-ONS

UNIVERSAL ADD-ONS

TRB ½", TRB ¾", LGSWL, SMSWL

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 3 FOR WATTAGE LIMITATIONS)

COVERED HALOGEN (MR16)

MR16-50W

G – LED COLOR TEMP

NOT AVAILABLE

H – ELECTRICAL OPTION

NOT AVAILABLE

I – GLASS OPTIONS

NOT AVAILABLE

J – ACCESSORIES

NOT AVAILABLE

K – ACCESSORY COLOR

SEE SECTION "B" FOR COLOR
OPTIONS.

NOTES

(1). FINISH OPTIONS, 49, 54, 61, 62, 63
ONLY AVAILABLE INSIDE AND OUT OF
FIXTURE. OTHER FINISHES ARE WHITE
INSIDE.

(2). FINISH OPTIONS FOR SHADES ≤ 10"
IN DIAMETER ARE THE SAME INSIDE
AND OUT OF FIXTURE. SHADES > 10"
IN DIAMETER ARE WHITE ON THE INSIDE.

(3). FINISH OPTIONS 61, 62, ARE
FINISHED WITH A SUPERCHROME ON
THE INSIDE FOR ALL LED LIGHT SOURCE
OPTIONS.

*ALL FIXTURES MOUNT TO A 4-O
JUNCTION BOX.

*FIXTURE DIMENSIONS MAY VARY ±
0.25.

BULB SPECIFICATIONS

WATTAGE: 6.6W LED (50W REPLACEMENT)

COLOR TEMP: 3000K


OUTPUT: 500 LUMEN

VOLTAGE: 12V


BASE: GU5.3 BI-PIN

LAMP: MR16 (DIMMABLE)

SHADE DIMENSIONS



K1 H - 3.25" W - 2.875"



K2 H - 4.75" W - 3.25"



C - MOUNTING OPTIONS

1/2" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED




E31 6"(H) 18"(W)




E32 6"(H) 18"(W)




E33 6"(H) 18"(W) 18"(Proj.)

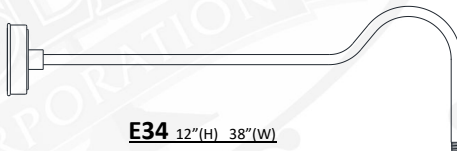


E34 12"(H) 38"(W)

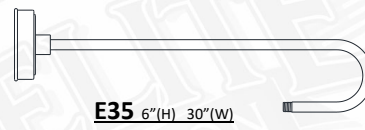

E35 6"(H) 30"(W)

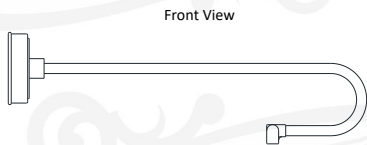


Front View




Side View

E36 6.5"(H) 18"(W) 30"(Proj.)

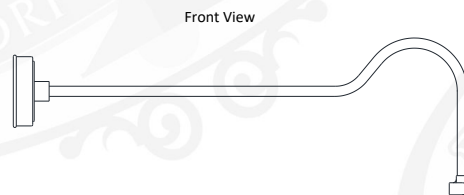

Front View




Side View


E37 13"(H) 18"(W) 38"(Proj.)

3/4" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

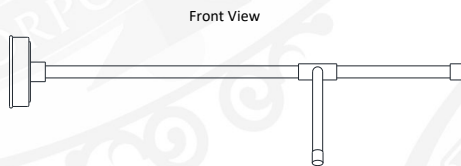

Front View

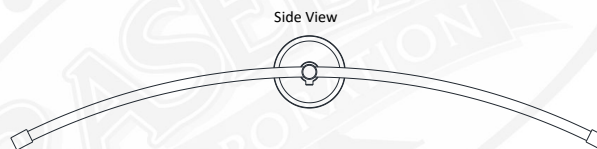


Side View

E38 9.5"(H) 50"(W) 38"(Proj.)



E39 6"(H) 40"(W)

E14



* Baselite will take your sketch and fabricate a custom arm extension to meet your needs

* Dimensions to be determined by customer

NOTES:



* All arms sold with Cast Backplate (CB)
* Backplate may vary in size depending on light source.




D - MOUNTING ADD-ONS


UNIVERSAL STEM AND ARM ADD-ONS

* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:

MODEL #: -/-/-/LWTM, TRB 1/2", LGSWL/-/-/-/-/-/-/-/
A B C D E F G H I J K



SWL 1/2" NPT swivel
For all arms 7" wide in diameter or smaller



LGSWL 1/2" NPT SWIVEL
For all shades greater than 7" wide in diameter



TRB 1/2"-4' Cable SUPPORT
TRB 3/4"-4' Cable SUPPORT

F – LIGHT SOURCE

COVERED HALOGEN (MR16) BASE GU5.3 Bipin

50W (MAX) - K1, K2

***IMPORTANT** – FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT. EXAMPLE: / MR16-50W /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
MR16-50W	50W	PER BULB SPECS	N/A	12V	PER BULB SPECS