



BASELITE – WCG – CF – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	X	/
	A	B	C	D	E	F	G	H	I	J	K
EXAMPLE:	WCG12	41	E16	CB ½"	43	45W	3K	LDM120	PR3	-	44

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES: **BABA COMPLIANT**



WCG14/74/ST18/STC/74/100INC/PR3

A - SHADES

WCG SERIES

WCG12 - 42WCF (MAX), (3" GLASS), (3" GUARD)
WCG14 - 42WCF (MAX), (3" GLASS), (3" GUARD)
WCG16 - 42WCF (MAX), (3" GLASS), (3" GUARD)
WCG20 - 42WCF (MAX), (3" GLASS), (3" GUARD)
WCG24 - 42WCF (MAX), (4" GLASS), (4" GUARD)

B - FINISH OPTIONS

(SEE NOTES FOR LIMITATIONS)
 (SEE WEBSITE FOR SWATCH COLORS)

20, 21, 22, 23, 40, 41, 41.5, 42, 43, 44, 45,
 46, 48, 49, 50, 51, 52, 53, 54, 55, 59, 60, 61,
 62, 63, 70, 71, 72, 73

C - MOUNTING OPTIONS

½" ARM EXTENSIONS

E1, E3, E4, B1, E16, E17

¾" ARM EXTENSIONS

E3A, E4A, E5, E6, E7, E8, E9,
 E10, E11, E12, E13, B15, B15S,
 E19, E20, E21, E25

E14 - CREATE YOUR OWN

(BASELITE WILL TAKE YOUR SKETCH AND
 FABRICATE A CUSTOM ARM EXTENSION TO
 MEET YOUR NEEDS).

CORD MOUNT

CFBLC, CFWHC, CFTCB, CFTCW, CFTCHB,
 CFTCHW, CFTLB, CFTLW, CFRCB, CFRCW,
 CFRCHB, CFRCHW, CFFHB, CFFHW,
 CFHBLC, CFHWHC, CFCBLC, CFCWHC,
 CFCHB, CFCHW

STEM MOUNT

DP24, ST6, ST12, ST18, ST24, ST36, ST48,
 STXX

D - MOUNTING ADD-ONS

CF ADD-ONS

CFWTM, CFSLC, CFSTC

UNIVERSAL ADD-ONS

FH ½", FH ¾", LGSWL

E - MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F - LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)

COMPACT FLUORESCENT (CF)

26W, 32W, 42W

G - LED COLOR TEMP

NOT AVAILABLE

H - ELECTRICAL OPTION

(SEE PAGE 4 FOR DIMMING OPTION SPECIFICATIONS)

CDM120

CDM277

CDM120/277

I - GLASS OPTIONS

3" GLASS (AVAILABLE FOR E1 & HE1)

CL3, CLT3, BL3, RE3, GR3,
 AH3, FR3, FRT3, PR3

4" GLASS (AVAILABLE FOR E2 & HE2)

CL4, CLT4, BL4, RE4, GR4,
 AH4, FR4, FRT4, PR4

J - ACCESSORIES

NOT AVAILABLE

K - ACCESSORY COLOR

SEE SECTION "B" FOR COLOR
 OPTIONS.

NOTES

(1). FINISH OPTIONS 75, 76, 77, 83, 84, 88, 93
 AND 98 ARE APPLIED BY HAND. THESE
 FINISHES WILL VARY IN CONSISTENCY.

(2). FINISH OPTIONS 38, 39, 40, 49, 54, 57,
 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88,
 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT
 OF FIXTURE. OTHER FINISHES ARE WHITE
 INSIDE.

(3). FINISH OPTIONS FOR SHADES ≤ 10" IN
 DIAMETER ARE THE SAME INSIDE AND OUT
 OF FIXTURE. SHADES > 10" IN DIAMETER ARE
 WHITE ON THE INSIDE.

(4). FINISH OPTIONS 61, 62, 70, 71, 72, 73
 ARE FINISHED WITH A SUPERCHROME ON
 THE INSIDE FOR ALL LED LIGHT SOURCE
 OPTIONS.

(5). COLOR CORDS ARE NOT APPLICABLE FOR
 LED OPTIONS.

*ALL ARMS COME WITH A CAST BACKPLATE
 (CB1/2", CB3/4", LWTM, CFWTM, ECT.).

*ACCORDING TO THE LIGHT SOURCE THE
 BACKPLATE MAY VARY IN SIZE. (EXAMPLE:
 LED LIGHT SOURCE WILL HAVE A DEEPER
 BACKPLATE TO HOUSE THE DRIVER).

*ALL FIXTURES MOUNT TO A RECESSED 4-O
 JUNCTION BOX.

*FIXTURE DIMENSIONS MAY VARY ± 0.25.

*CORD AND CANOPY COME IN THE SAME
 COLOR.

*RATED FOR WET LOCATION.



WCG12 H - 9.625" W - 12"

WCG14 H - 10" W - 14"

WCG16 H - 10.5" W - 16"

WCG20 H - 10.875" W - 20"


WCG24 H - 12" W - 24"



C - MOUNTING OPTIONS


1/2" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

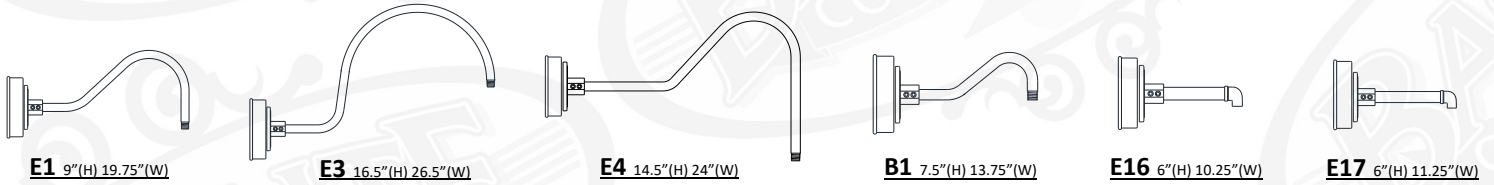


3/4" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

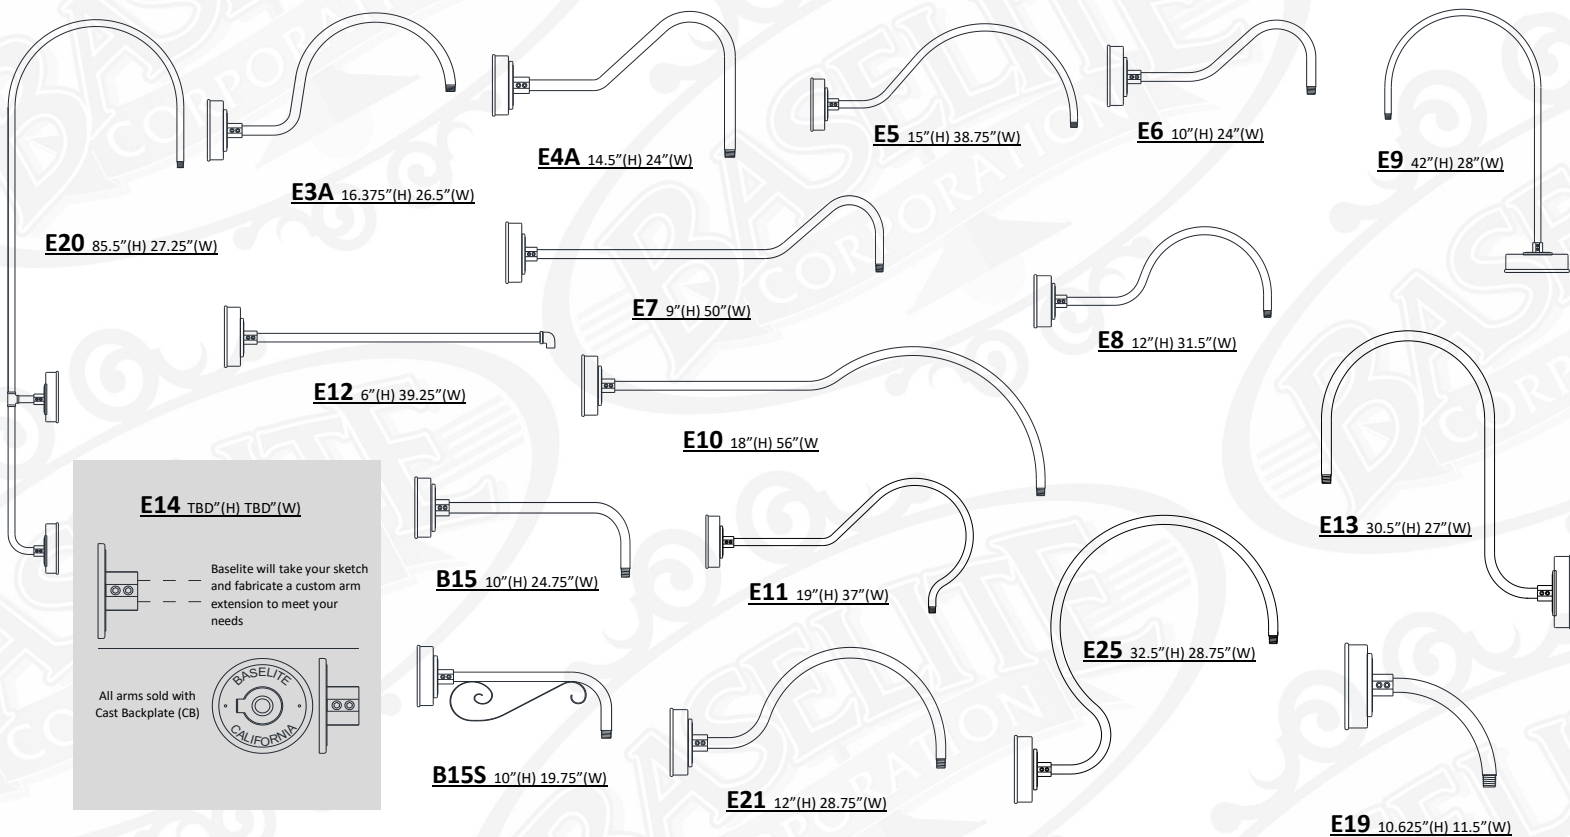

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

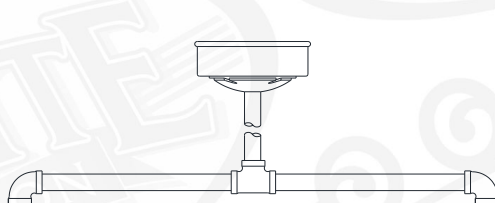

DP24 DOUBLE PENDANT 20"(H) 24"(W)
*DP24 COMES STANDARD WITH CFSTC AND ST18



ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)

*CANOPY NOT INCLUDED, ADD IN SECTION D

* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST

C - MOUNTING OPTIONS (CONTINUED)

CORD MOUNTS

*FOR COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY. *CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: 4" (H) 5.5" (W)
*CORD AND CANOPY COME IN THE SAME COLOR.



CFBLC 8' BLACK CORD

CFWHC 8' WHITE CORD



CFTCB 8' BLACK CORD, CABLE, and LOOP

CFTCW 8' WHITE CORD, CABLE, and LOOP



CFTCHB 8' BLACK CORD, 3' CHAIN, and LOOP

CFTCHW 8' WHITE CORD, 3' CHAIN, and LOOP



CFRCB 8' BLACK CORD, CABLE, and LOOP

CFRCW 8' WHITE CORD, CABLE, and LOOP



CFRCHB 8' BLACK CORD, 3' CHAIN, and LOOP

CFRCHW 8' WHITE CORD, 3' CHAIN, and LOOP



CFCHB 8' BLACK CORD, 3' CHAIN, and LOOP
CFCHW 8' WHITE CORD, 3' CHAIN, and LOOP
 * Loop may vary due to shade style




CFFHB 8' BLACK CORD WITH FLAT HUB

CFFHW 8' WHITE CORD WITH FLAT HUB



CFCBLC 8' BLACK CORD and CABLE

CFCWHC 8' WHITE CORD and CABLE




NOTES:

*DISTANCE TO LAMP (CF) 10'


*All compact fluorescent and LED housings may vary in size according to light source chosen.

STEM AND ARM ADD-ONS


* FOR COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



CFWTM WEATHERTIGHT CF WALL MOUNT



CFSLC CF SLOPE CEILING CANOPY




CFSTC CF STEM MOUNT CANOPY

UNIVERSAL STEM AND ARM ADD-ONS

* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:

MODEL #: -/-/-/ LW TM, TRB 1/2", LGSWL /-/-/-/-/-/-/-/-
A B C D E F G H I J K



LGSWL 1/2" NPT SWIVEL
For all shades greater than
7" wide in diameter



FH 1/2" FLAT HUB 1/2"
FH 3/4" FLAT HUB 3/4"



F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS.

COMPACT FLUORESCENT (CF)

CF 26W, 32W, OR 42(MAX) - WCG12, WCG14, WCG16, WCG20, WCG24

***IMPORTANT** – FOR COMPACT FLUORESCENT (CF) LIGHT SOURCE, FIXTURES ARE LIMITED DUE TO THE SIZE OF THE SHADE. PLEASE SEE THE CHART TO THE LEFT TO SEE WHAT WATTAGE IS COMPARABLE FOR EACH FIXTURE WHEN ORDERING. **EXAMPLE:** / CF42W /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
CF26W	26W	PER BULB SPECS	>90	120-277 VAC	See section "H"
CF32W	32W	PER BULB SPECS	>90	120-277 VAC	See section "H"
CF42W	42W	PER BULB SPECS	>90	120-277 VAC	See section "H"

H – ELECTRICAL OPTION

MOST BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES. PLEASE SEE NOTES BELOW AND FOR FURTHER DETAILS CONTACT THE FACTORY. FOR DIMMING BALLAST OPTION, PLEASE CHOOSE MARK X OR MARK VII, SO RESTRICTIONS APPLY DUE TO THE SIZE OF THE BALLAST AND FIXTURE.

COMPACT FLUORESCENT DIMMING OPTIONS

PROVIDED WITH ADVANCE TRANSFORMER, PLEASE CHOOSE MARK 10 OR MARK 7 WITH SPECIFIED VOLTAGE FROM THE LIST BELOW. CONTACT BALLAST MANUFACTURER FOR SPECIFICATIONS.

CDM7-120/277 - ADVANCE MARK 7 0-10v ELECTRICAL BALLST – 120/277 VOLT

CDM10-120 - ADVANCE MARK 10 ELECTRICAL BALLST – 120 VOLT

CDM10-277 - ADVANCE MARK 10 ELECTRICAL BALLST – 277 VOLT

I – GLASS OPTIONS

NOTE : GLASS IS HEAT RESISTANCE BOROSILICATE. *TEMPERD GLASS AVAILABLE UPON REQUEST. CONTACT YOUR LOCAL SALES REPRESENTATIVE FOR INFORMATION OR CALL FACTORY FOR QUESTIONS.

*3" GLASS AVAILABLE FOR P1 & HP1



CL3 3" CLEAR GLASS

CL4 4" CLEAR GLASS



PR3 3" PRISMATIC GLASS

PR4 4" PRISMATIC GLASS



RE3 3" RED GLASS

RE4 4" RED GLASS



BL3 3" BLUE GLASS

BL4 4" BLUE GLASS



FR3 3" FROSTED GLASS

FR4 4" FROSTED GLASS



AH3 3" AMBER HYDE GLASS


AH4 4" AMBER HYDE GLASS



GR3 3" GREEN GLASS

GR4 4" GREEN GLASS

GLASS – DIMENSIONS	
3" GLASS	
Diameter	3.34"
Height	6.93"
Fitter	3.29"
4" GLASS	
Diameter	4.34"
Height	8.37"
Fitter	4.29"



GLASS – MAX WATTAGE
3" GLASS – 100W INC / LED12W
4" GLASS – 200W INC / LED25W