



BASELITE – WCG – INC – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	/	X	/
	A	B	C	D	E	F	G	H	I	J	K	
EXAMPLE:	WCG12	41	E16	CB ½"	43	45W	3K	LDM120	PR3	-	44	

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES: **BABA COMPLIANT**



WCG14/74/ST18/STC/74/100INC/PR3

A - SHADES

WCG SERIES

WCG12 - 100WINC (MAX), (3" GLASS), (3" GUARD)
WCG14 - 100WINC (MAX), (3" GLASS), (3" GUARD)
WCG16 - 100WINC (MAX), (3" GLASS), (3" GUARD)
WCG20 - 100WINC (MAX), (3" GLASS), (3" GUARD)
WCG24 - 200WINC (MAX), (4" GLASS), (4" GUARD)

B - FINISH OPTIONS

(*SEE NOTES FOR LIMITATIONS*)
 (SEE WEBSITE FOR SWATCH COLORS)

20, 21, 22, 23, 40, 41, 41.5, 42, 43, 44, 45,
 46, 48, 49, 50, 51, 52, 53, 54, 55, 59, 60, 61,
 62, 63, 70, 71, 72, 73

C - MOUNTING OPTIONS

¼" ARM EXTENSIONS

E1, E3, E4, B1, E16, E17

¾" ARM EXTENSIONS

E3A, E4A, E5, E6, E7, E8, E9,
 E10, E11, E12, E13, B15, B15S,
 E19, E20, E21, E25

E14 - CREATE YOUR OWN

(BASELITE WILL TAKE YOUR SKETCH AND
 FABRICATE A CUSTOM ARM EXTENSION TO
 MEET YOUR NEEDS).

CORD MOUNT

BLC, WHC, TCB, TCW, TCHB, TCHW, TLB,
 TLW, TLB, TLW, RCB, RCW, RCHB, RCHW,
 FHB, FHW, CBLC, CWHC, CHB, CHW

STEM MOUNT

DP24, ST6, ST12, ST18, ST24, ST36, ST48,
 STXX

D - MOUNTING ADD-ONS

INC ADD-ONS

CB1/2", CB3/4", CBC1/2", CBC3/4", SLC1/2",
 SLC3/4", STC1/2"

UNIVERSAL ADD-ONS

FH ½", FH ¾", LGSWL

E - MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F - LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)

INCANDESCENT (INC)

100W, 150W, 200W

G - LED COLOR TEMP

NOT AVAILABLE

H - ELECTRICAL OPTION

NOT AVAILABLE

I - GLASS OPTIONS

CL3, CLT3, BL3, RE3, GR3, AH3, FR3,
 FRT3, PR3

J - ACCESSORIES

NOT AVAILABLE

K - ACCESSORY COLOR

SEE SECTION "B" FOR COLOR
 OPTIONS.

NOTES

(1). FINISH OPTIONS 75,76, 77, 83, 84, 88, 93
 AND 98 ARE APPLIED BY HAND. THESE
 FINISHES WILL VARY IN CONSISTENCY.

(2). FINISH OPTIONS 38, 39, 40, 49, 54, 57,
 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88,
 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT
 OF FIXTURE. OTHER FINISHES ARE WHITE
 INSIDE.

(3). FINISH OPTIONS FOR SHADES ≤ 10" IN
 DIAMETER ARE THE SAME INSIDE AND OUT
 OF FIXTURE. SHADES > 10" IN DIAMETER ARE
 WHITE ON THE INSIDE.

(4). FINISH OPTIONS 61, 62, 70, 71, 72, 73
 ARE FINISHED WITH A SUPERCHROME ON
 THE INSIDE FOR ALL LED LIGHT SOURCE
 OPTIONS.

(5). COLOR CORDS ARE NOT APPLICABLE FOR
 LED OPTIONS.

*ALL ARMS COME WITH A CAST BACKPLATE
 (CB1/2", CB3/4", LWTM, CFWTM, ECT.).

*ACCORDING TO THE LIGHT SOURCE THE
 BACKPLATE MAY VARY IN SIZE. (EXAMPLE:
 LED LIGHT SOURCE WILL HAVE A DEEPER
 BACKPLATE TO HOUSE THE DRIVER.).

*ALL FIXTURES MOUNT TO RECESSED A 4-0
 JUNCTION BOX.

*FIXTURE DIMENSIONS MAY VARY ± 0.25.

*CORD AND CANOPY COME IN THE SAME
 COLOR.

*RATED FOR WET LOCATION.



WCG12	H - 9.625"	W - 12"
WCG14	H - 10"	W - 14"
WCG16	H - 10.5"	W - 16"
WCG20	H - 10.875"	W - 20"
WCG24	H - 12"	W - 24"




BASELITE VAPOR JAR CATALOG

PROJECT NAME: _____
PROJECT TYPE: _____

C - MOUNTING OPTIONS


1/2" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

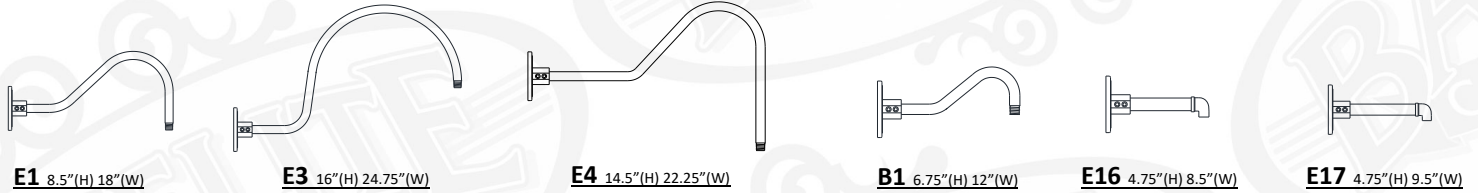


3/4" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

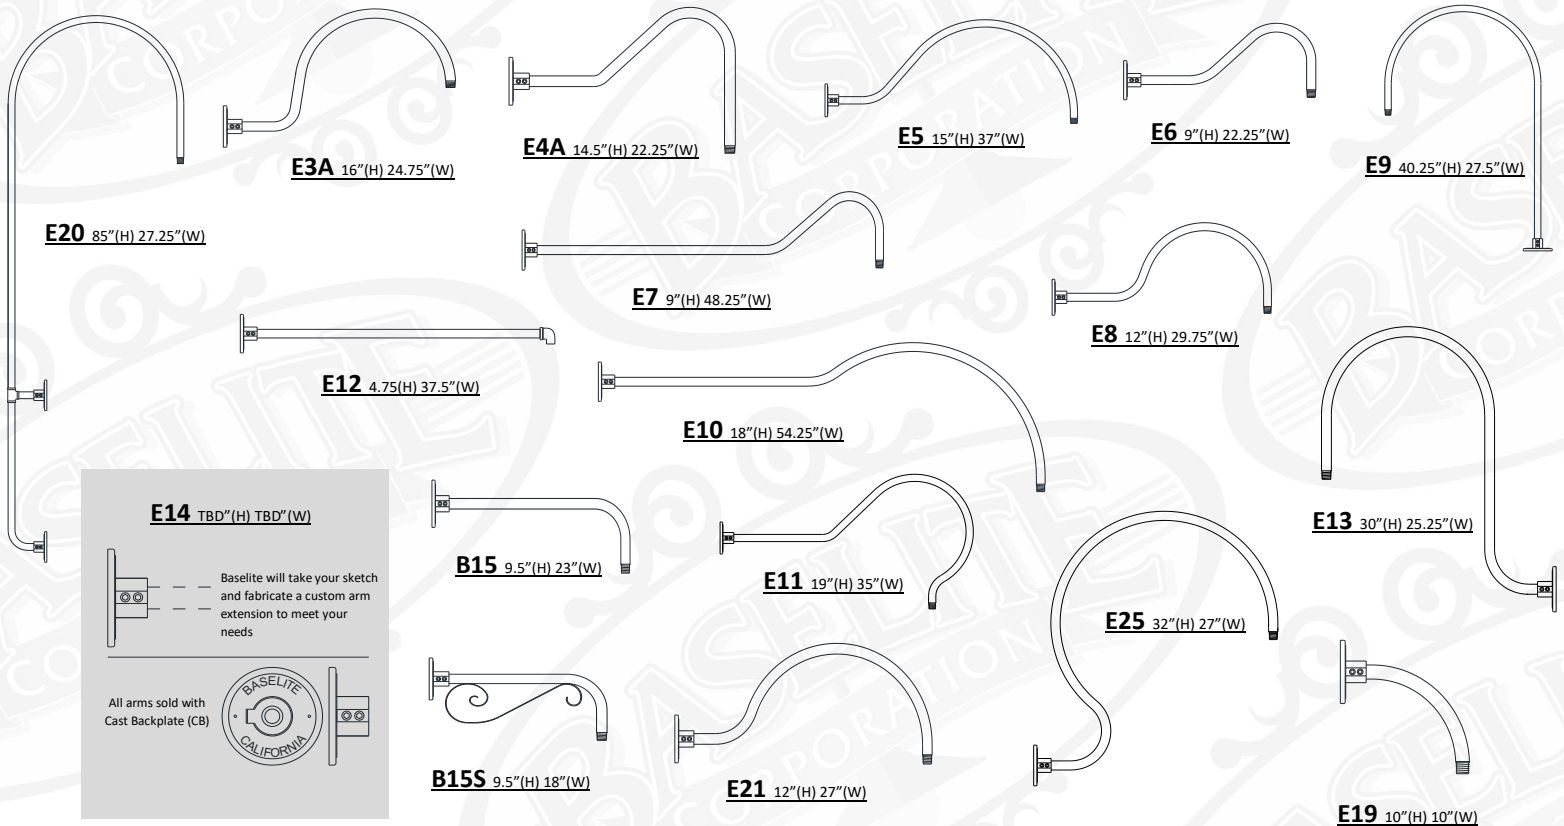

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

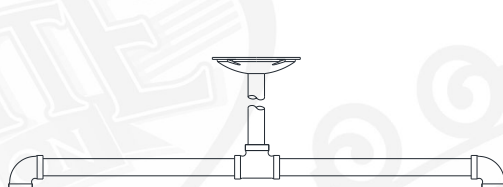

DP24 DOUBLE PENDANT 20"(H) 24"(W)
*DP24 COMES STANDARD WITH STC AND ST18



ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D
*1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST

*INCANDESCENT MAX WATTAGE 150 WATT. CALL FACTORY FOR HIGHER WATTAGES. LOOPS, CABLES, AND CHAINS AVAILABLE ONLY FOR INCANDESCENT. *CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: .625" (H) 5.25" (W)
*CORD AND CANOPY COME IN THE SAME COLOR.

BLC 8' BLACK CORD

WHC 8' WHITE CORD

TCB 8' BLACK CORD, CABLE, and LOOP

TCW 8' WHITE CORD, CABLE, and LOOP

TCHB 8' BLACK CORD, 3' CHAIN, and LOOP

TCHW 8' WHITE CORD, 3' CHAIN, and LOOP

TLB 8' BLACK TELEPHONE CORD AND CABLE

TLW 8' WHITE TELEPHONE CORD AND CABLE

RCB 8' BLACK CORD, CABLE, and LOOP

RCW 8' WHITE CORD, CABLE, and LOOP

RCHB 8' BLACK CORD, 3' CHAIN, and LOOP

RCHW 8' WHITE CORD, 3' CHAIN, and LOOP

FHB 8' BLACK CORD WITH FLAT HUB

FHW 8' WHITE CORD WITH FLAT HUB

CBLC 8' BLACK CORD and CABLE
CWLC 8' WHITE CORD and CABLE

CHB 8' BLACK CORD, 3' CHAIN, and LOOP
CHW 8' WHITE CORD, 3' CHAIN, and LOOP
 * Loop may vary due to shade style

CB 1/2" CAST ALUMINUM BACKPLATE 1/2 NPT

CB 3/4" CAST ALUMINUM BACKPLATE 3/4 NPT

CBC 1/2" 1/2" BACKPLATE COVER
CBC 3/4" 3/4" BACKPLATE COVER
 * Includes slip ring to hold 1/2" or 3/4" arm extension in place

SLC 1/2" SLOPE CEILING CANOPY 1/2"

SLC 3/4" SLOPE CEILING CANOPY 3/4"

*(Slopes To 20 Degrees)

STC 1/2" 1/2" STEM MOUNT CANOPY

UNIVERSAL STEM AND ARM ADD-ONS

MODEL #: -/-/-/ LWTM, TRB ½", LGSWL / -/-/-/-/-/-/-/
A B C D E F G H I J K

LGSWL 1/2" NPT SWIVEL
For all shades greater than 7"
wide in diameter

FH 1/2" FLAT HUB 1/2"
FH 3/4" FLAT HUB 3/4"



F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS.

MEDIUM BASE (MED) E26

100W - WCG12, WCG14, WCG16, WCG20
200W - WCG24

***IMPORTANT** – FOR INCANDESCENT (INC) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT. EXAMPLE: / MED150W /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
MED100W	100W	PER BULB SPECS	>90	120-277 VAC	PER BULB SPECS
MED150W	150W	PER BULB SPECS	>90	120-277 VAC	PER BULB SPECS
MED200W	200W	PER BULB SPECS	>90	120-277 VAC	PER BULB SPECS

*FIXTURE WATTAGE CAN BE DE-RATED TO MEET CODE COMPLIANCE "XXMED" – XX = DESIRED WATTAGE RATING BELOW MAX.

I – GLASS OPTIONS

NOTE : GLASS IS HEAT REISSTANCE BOROSILICATE. *TEMPERD GLASS AVAILABLE UPON REQUEST. CONTANCT YOUR LOCAL SALES REPRESENTATIVE FOR INFORMATION OR CALL FACTORY FOR QUESTIONS.



CL3 3" CLEAR GLASS

CL4 4" CLEAR GLASS



PR3 3" PRISMATIC GLASS

PR4 4" PRISMATIC GLASS



RE3 3" RED GLASS

RE4 4" RED GLASS



BL3 3" BLUE GLASS

BL4 4" BLUE GLASS



FR3 3" FROSTED GLASS

FR4 4" FROSTED GLASS



AH3 3" AMBER HYDE GLASS

AH4 4" AMBER HYDE GLASS



GR3 3" GREEN GLASS

GR4 4" GREEN GLASS

GLASS – DIMENSIONS	
3" GLASS	
Diameter	3.34"
Height	6.93"
Fitter	3.29"
4" GLASS	
Diameter	4.34"
Height	8.37"
Fitter	4.29"



GLASS – MAX WATTAGE	
3" GLASS	100W INC / LED12W
4" GLASS	200W INC / LED25W