



BASELITE - ARBOR – GU24 – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

Blank lines for project details

*FOR A COMPLETE MODEL NUMBER, MAKE A SELECTION FROM THE DROP DOWNS BELOW. SKIP SECTIONS THAT DO NOT APPLY.

MODEL

EXAMPLE: W513 41 E16 SQ 1/2" 43 32GU24 CDM120 PR3 GR13 43

A - SHADES

ARBOR

- W511 – 26GU24 (MAX)
- W5114 – 26GU24 (MAX)
- W513 – 32GU24 (MAX)
- W5134 – 42GU24 (MAX)
- W517 – 42GU24 (MAX)
- W5174 – 42GU24 (MAX)
- WV5174 – 42GU24 (MAX)
- SWS17 – 42GU24 (MAX)
- W5175 – 42GU24 (MAX)
- W5136 – 42GU24 (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)
(*SEE NOTES FOR LIMITATIONS*)

- 14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB, 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C – MOUNTING OPTIONS

1/2" ARM EXTENSIONS

- E1, E2, E2S, E3, E4, B1, E16, E17, E24, E27

3/4" ARM EXTENSIONS

- E3A, E4A, E5, E6, E7, E8, E9, E10, E11, E12, E13, B15, B15S, E19, E20, E21, E25

E14 - CREATE YOUR OWN

(BASELITE WILL TAKE YOUR SKETCH AND FABRICATE A CUSTOM ARM EXTENSION TO MEET YOUR NEEDS).

1/2" WALL MOUNT

- B13, WM13R, WM13X, B10, B11, B101

3/4" WALL MOUNT

- B9, B9C, B12, WM14X, WM15, WM35X, WM55X, WM60X, WM61X, WM70X, WM71X

COMPACT FLUORESCENT CORD MOUNT

- CFBLC, CFWHC, CFTCB, CFTCW, CFTCHB, CFTCHW, CFTLB, CFTLW, CFRCB, CFRCW, CFRCHB, CFRCHW, CFFHB, CFFHW, CFHBL, CFHBLC, CFHWHC, CFCBLC, CFCWHC, CFCHB, CFCHW

STEM MOUNT

- ST6, ST12, ST18, ST24, ST36, ST48, STXX

D – MOUNTING ADD-ONS

CF ADD-ONS

- CFWTM, CFSLC, CFSTC

UNIVERSAL ADD-ONS

- SQ 1/2", SQ 3/4", FH 1/2", FH 3/4", TRB 1/2", TRB 3/4", SWL, LGSWL, CNK, INB, RINB

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – WATTAGE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)

- GU24 BASE BI PIN (GU24) WATTAGE OPTIONS**
26W, 32W, 42W

G – LED COLOR TEMP

NOT AVAILABLE

(SEE PAGE 4 FOR DIMMING OPTION SPECIFICATIONS)

- CDM120
- CDM277
- CDM120/277

I – GLASS OPTIONS

- CL3, CL4, BL3, BL4, RE3, RE4, GR3, GR4, AH3, AH4, FR3, FR4, PR3, PR4, BA, BAX, BAF, PR8, PR8F, FN, OC

J – ACCESSORIES

- GR13, GR11, GR17, REF, UGR, LGR11, LGR13, LGR17, CRL13, CRL17, FLE11, FLE13, FLE17, FGR13, FGR17, GU-1, GU-2, WG-1, WG-2


K – ACCESSORY COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

NOTES


- (1). FINISH OPTIONS 20, 21, 22, 23 ARE FOR SOLID BRASS FIXTURES ONLY.
- (2). FINISH OPTIONS 19, 21, 22, 23, 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
- (3). FINISH OPTIONS 19, 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- (4). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- (5). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
- (6). ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
- (7). ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).
- (8). ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.
- (9). FIXTURE DIMENSIONS MAY VARY ±0.25.
- (10). CORD AND CANOPY COME IN THE SAME COLOR.

SHADE DIMENSIONS




W513 H-8" W-13"

W517 H-8" W-17"




W5134 H-9.5" W-13"

W5174 H-9.5" W-17"




WV5174 H-9.5" W-17"


*SHADE RATED FOR DRY LOCATION ONLY



SWS17 H-9.5" W-17"




W5136 H-10.25" W-13"



W511 H-5.5" W-11"

W5114 H-7.5" W-11"

*W5114 – WITH CAST ALUMINUM TOP
*W511 – NO TOP




W5175 H-11" W-17"



C - MOUNTING OPTIONS


1/2" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

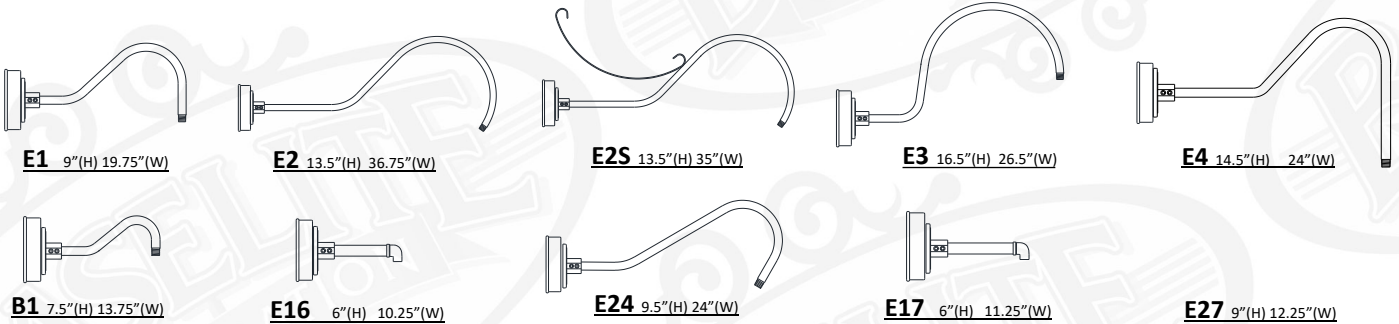

3/4" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

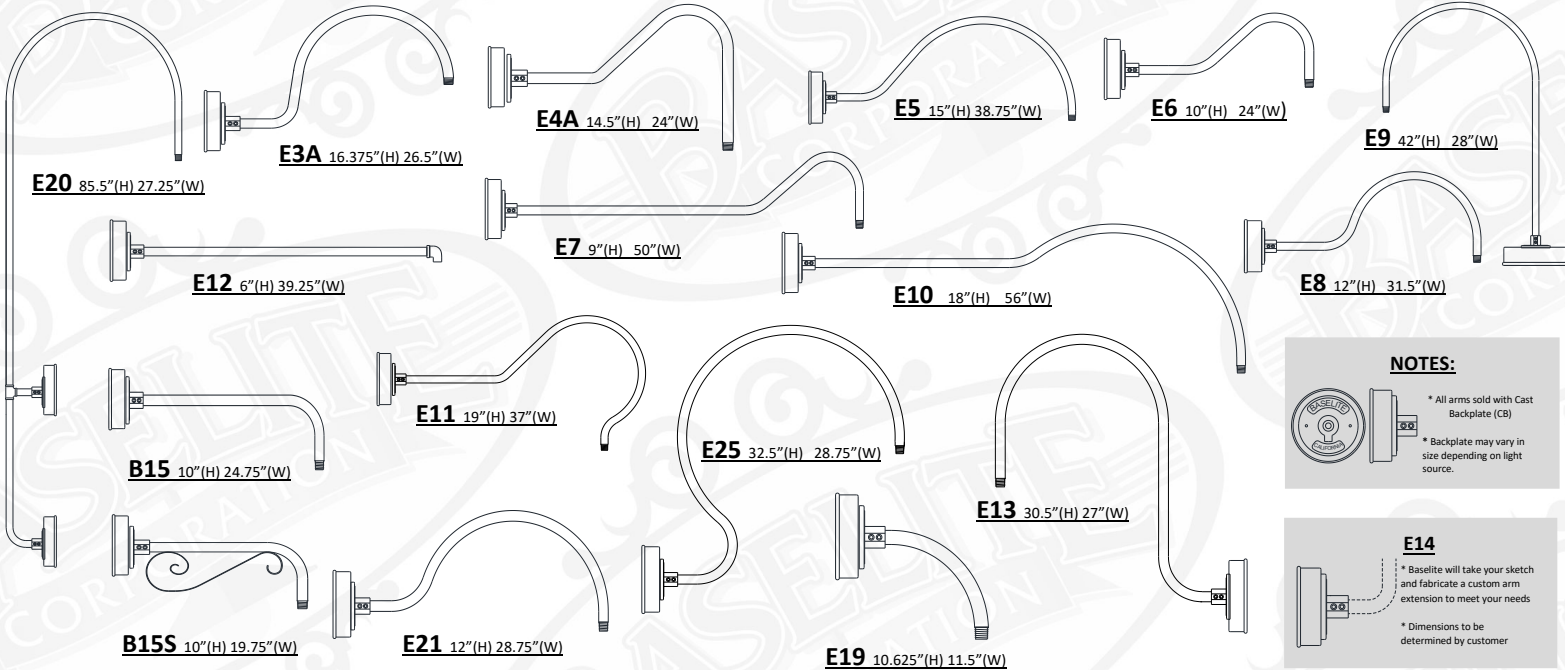

NOTES:


- All arms sold with Cast Backplate (CB)
- Backplate may vary in size depending on light source.

E14

- Baselite will take your sketch and fabricate a custom arm extension to meet your needs
- Dimensions to be determined by customer


1/2" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED

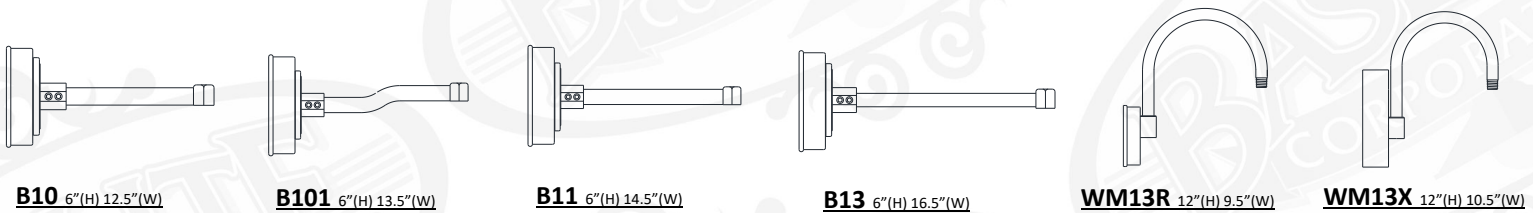

3/4" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED

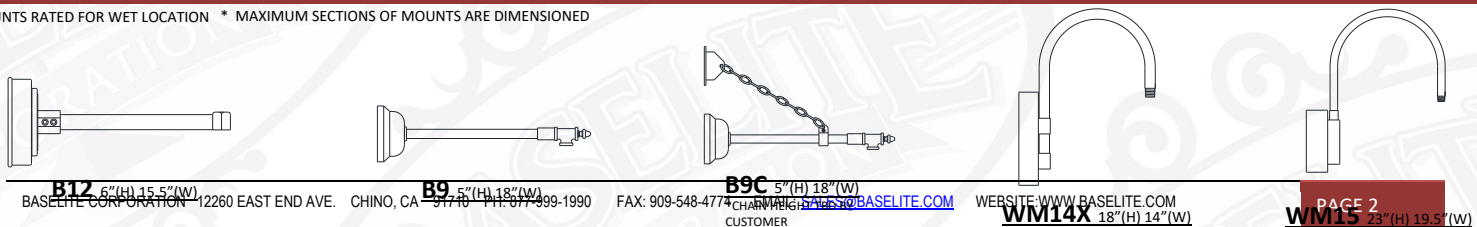




C - MOUNTING OPTIONS (CONTINUED)

3/4" WALL MOUNTS


*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED




WM35X 26"(H) 22"(W)




WM55X 19"(H) 27"(W)




WM60X 18"(H) 22"(W)



WM61X 18"(H) 22"(W)




WM70X 18"(H) 22"(W)



WM71X 18"(H) 22"(W)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

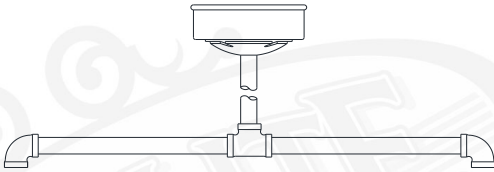

DP24 DOUBLE PENDANT 20"(H) 24"(W)
*DP24 COMES STANDARD WITH LSTC AND ST18



ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D
* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST




SC24 SCROLL STEM 33"(H) 26"(W)
*SC24 COMES STANDARD WITH LSTC

GU-24 CORD MOUNTS

*FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY. *CORDS RATED FOR DRY LOCATION
*CANOPY DIMENSIONS: 4" (H) 5.5" (W) *CORD AND CANOPY COME IN THE SAME COLOR.



CFBLC 8' BLACK CORD
CFWHC 8' WHITE CORD



CFTCB 8' BLACK CORD, CABLE, and LOOP
CFTCW 8' WHITE CORD, CABLE, and LOOP



CFTCHB 8' BLACK CORD, 3' CHAIN, and LOOP
CFTCHW 8' WHITE CORD, 3' CHAIN, and LOOP



CFRCB 8' BLACK CORD, CABLE, and LOOP
CFRCW 8' WHITE CORD, CABLE, and LOOP



CFRCHB 8' BLACK CORD, 3' CHAIN, and LOOP
CFRCHW 8' WHITE CORD, 3' CHAIN, and LOOP



CFCFB 8' BLACK CORD, 3' CHAIN, and LOOP
CFCFW 8' WHITE CORD, 3' CHAIN, and LOOP
* Loop may vary due to shade style



CFFHB 8' BLACK CORD WITH FLAT HUB
CFFHW 8' WHITE CORD WITH FLAT HUB



CFCBLC 8' BLACK CORD and CABLE
CFCWHC 8' WHITE CORD and CABLE

NOTES:

*DISTANCE TO LAMP (CF) 10"


*All compact fluorescent and LED housings may vary in size according to light source chosen.




D - MOUNTING ADD-ONS

GU-24 STEM AND ARM


* FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



CFWTM WEATHERTIGHT CF WALL MOUNT



CFSLC CF SLOPE CEILING CANOPY



CFSTC CF STEM MOUNT CANOPY

UNIVERSAL STEM AND ARM ADD-ONS


* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:

MODEL #: -/-/-/LWTM, TRB 1/2" / LGSWL -/-/-/-/-/-/-/-
A B C D E F G H I J K




CNK CANOPY For MULTIPLE FIXTURES

*CNK dimensions vary on number of fixtures applied




LGSWL 1/2" NPT SWIVEL

For all shades greater than 7" wide in diameter



FH 1/2" FLAT HUB 1/2"

FH 3/4" FLAT HUB 3/4"



TRB 1/2"- 4' CABLE SUPPORT

TRB 3/4"- 4' CABLE SUPPORT

F - WATTAGE

GU24 BI-PIN (GU24) FOR LED OR CFL BULBS

26GU24 (MAX) - W511, W5114

32GU24 (MAX) - W513, W5134

42GU24 (MAX) - W5136, W517, W5174, W5175, WV5174

***IMPORTANT** – FOR COMPACT FLUORESCENT (CF) LIGHT SOURCE, FIXTURES ARE LIMITED DUE TO THE SIZE OF THE SHADE. PLEASE SEE THE CHART TO THE LEFT TO SEE WHAT WATTAGE IS COMPARABLE FOR EACH FIXTURE WHEN ORDERING.
EXAMPLE: / 42GU24 /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
26GU24	26	PER BULB SPECS	N/A	120-277 VAC	SEE SECTION "H"
32GU24	32	PER BULB SPECS	N/A	120-277 VAC	SEE SECTION "H"
42GU24	42	PER BULB SPECS	N/A	120-277 VAC	SEE SECTION "H"

*FIXTURE WATTAGE CAN BE DE-RATED TO MEET CODE COMPLIANCE "CFXXW" – XX = DESIRED WATTAGE RATING BELOW MAX.

H - ELECTRICAL OPTION

MOST BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES. PLEASE SEE NOTES BELOW AND FOR FURTHER DETAILS CONTACT THE FACTORY. FOR DIMMING BALLAST OPTION PLEASE CHOOSE MARK X OR MARK VII, SO RESTRICTIONS APPLY DUE TO THE SIZE OF THE BALLAST AND FIXTURE.

DIMMING OPTIONS

PROVIDED WITH ADVANCE TRANSFORMER, PLEASE CHOOSE MARK 10 OR MARK 7 WITH SPECIFIED VOLTAGE FROM THE LIST BELOW. CONTACT BALLAST MANUFACTURER FOR SPECIFICATIONS.

CDM7-120/277 - ADVANCE MARK 7 0-10v ELECTRICAL BALLST – 120/277 VOLT

CDM10-120 - ADVANCE MARK 10 TRI-ELV ELECTRICAL BALLST – 120 VOLT

CDM10-277 - ADVANCE MARK 10 TRI-ELV ELECTRICAL BALLST – 277 VOLT



BASELITE RLM CATALOG

I – GLASS OPTIONS

NOTE : GLASS IS HEAT RESISTANCE BOROSILICATE. *TEMPERD GLASS AVAILABLE UPON REQUEST. CONTACT YOUR LOCAL SALES REPRESENTATIVE FOR INFORMATION OR CALL FACTORY FOR QUESTIONS.



CL3 3" CLEAR GLASS

CL4 4" CLEAR GLASS



PR3 3" PRISMATIC GLASS

PR4 4" PRISMATIC GLASS



RE3 3" RED GLASS

RE4 4" RED GLASS



BL3 3" BLUE GLASS

BL4 4" BLUE GLASS



GLASS – DIMENSIONS

3" GLASS
 Diameter 3.34"
 Height 6.93"
 Fitter 3.29"

4" GLASS
 Diameter 4.34"
 Height 8.37"
 Fitter 4.29"

GLASS – MAX WATTAGE
 3" GLASS – 100 MED / 25 LED
 4" GLASS – 200 MED / 25 LED



FR3 3" FROSTED GLASS

FR4 4" FROSTED GLASS



AH3 3" AMBER HYDE GLASS

AH4 4" AMBER HYDE GLASS



GR3 3" GREEN GLASS

GR4 4" GREEN GLASS



BA 6" OPAL BALL
 (100 MED/12 LED MAX)



BAX 9" CLEAR GLOBE

BAF 9" FROSTED GLOBE
 (200 MED/25 LED MAX)



FN 8" CLEAR TEXTURED GLOBE
 (150 MED/25 LED MAX)



BA7 7" CLEAR GLOBE

BA7F 7" FROSTED GLOBE
 (100 MED/25 LED MAX)




PR8 8" PRISMATIC

PR8F 8" PRISMATIC FROSTED
 (200 MED/45 LED MAX)



OC 8" OPAL TAPERED GLOBE
 (60 MED/25 LED MAX)


J – ACCESSORIES



GR11 11" WIRE GRILL

GR13 13" WIRE GRILL


GR17 17" WIRE GRILL



LGR11 11" LOUVERED GRILL

LGR13 13" LOUVERED GRILL

LGR17 17" LOUVERED GRILL



FGR11 11" FLAT GRILL


FGR13 13" FLAT GRILL

FGR17 17" FLAT GRILL



CRL13 13" CURVED POLYCARB LENS


CRL17 17" CURVED POLYCARB LENS



FLE11 11" FLAT CLEAR LENS

FLE13 13" FLAT CLEAR LENS


FLE17 17" FLAT CLEAR LENS




REF 9.5" DIAMETER REFRACTOR




UGR U-WIRE GUARD




WG-1 WIRE GUARD



WG-2 WIRE GUARD



GU-1 CAST ALUMINUM GUARD



GU-2 CAST ALUMINUM GUARD